



# PRODUCT CATALOGUE



Australian Distributor for the  
Renowned Magswitch Range!

**1800 466 246**  
[www.msamagnetics.com.au](http://www.msamagnetics.com.au)  
**YOUR SOURCE FOR FORCE**



# TABLE OF CONTENTS

## Contents

<b>Magswitch Range</b>	<b>4 - 11</b>
Magswitch 90 Degree Angles	5
Magswitch Boomer Angles	5
Magswitch Ground Clamps	6
Magswitch Mag-Utility Hooks	7
Magswitch Pivot Angles	7
Magswitch MagMounts	8
Magswitch MagSquares	9
Magswitch Mini Angles	10
Magswitch MagJigs	11
<b>Magswitch No-Touch Tool Range</b>	<b>12 - 15</b>
Magswitch Hand Lifters	13
Magswitch MagDolly	14
Magswitch Extenda-Lifts	14
Magswitch MagReach 400	15
<b>MSA and Magswitch Lifting Magnets</b>	<b>16 - 21</b>
MSA Pro-Lift Lifting Magnets	17
Magswitch MLAY Lifting Magnets	18-19
Magswitch CE Magnetic Lifters	20-21
<b>MSA Cable Safety Range</b>	<b>22 - 23</b>
MSA FRAS Cable-Mate Magnetic Lead Holder	23
MSA Cable-Mate Magnetic Lead Holder	23
MSA Cable-Buddy Magnetic Lead Holder	23
MSA Powr-Safe Magnetic Lead Holder	23
<b>MSA Magnetic Workshop Clean-Up Range</b>	<b>24 - 27</b>
MSA Magnetic Workshop Wands	25
MSA Magnetic Super Sweepers	26
MSA Magnetic Forklift Sweepers	27
<b>MSA Welding Torch Holders</b>	<b>28 - 29</b>
MSA Mig-Mate Welding Torch Holder	29
MSA Tig-Mate Welding Torch Holder	29
<b>MSA Grip Grab Pot Magnets</b>	<b>30 - 33</b>
A-Series – CSK Centre Hole	31
B-Series – Straight Hole	31
C-Series – Male Thread	32
D-Series – Female Threaded Boss	32
E-Series – Complete with Hook	33

Magswitch Range

Magswitch No-Touch Tool Range

MSA and Magswitch Lifting Magnets

MSA Cable Safety Range

MSA Magnetic Workshop Clean-Up Range

MSA Welding Torch Holders

MSA Grip Grab Pot Magnets



**MAGSWITCH  
RANGE**

**Magswitch 90 Degree Angles**

**90° ANGLE 165**  
CODE: 8100548



Max Breakaway:	<b>68 kg</b>
Full Saturation Thickness:	<b>6 mm</b>
2:1 Shear Working Load:	<b>8.4 kg</b>
Net Weight:	<b>0.8 kg</b>
Overall Height:	<b>205 mm</b>
Magnetic Pole Footprint:	<b>48 x 31 mm</b>

**90° ANGLE 400**  
CODE: 8100454



Max Breakaway:	<b>181 kg</b>
Full Saturation Thickness:	<b>3.43 mm</b>
2:1 Shear Working Load:	<b>9 kg</b>
Net Weight:	<b>2.8 kg</b>
Overall Height:	<b>181 mm</b>
Magnetic Pole Footprint:	<b>64 x 41.26 mm</b>

**90° ANGLE 600**  
CODE: 8100495



Max Breakaway:	<b>272 kg</b>
Full Saturation Thickness:	<b>10 mm</b>
2:1 Shear Working Load:	<b>27 kg</b>
Net Weight:	<b>3.7 kg</b>
Overall Height:	<b>272 mm</b>
Magnetic Pole Footprint:	<b>75 x 51.5 mm</b>

**Magswitch Boomer Angles**

**BOOMERANGLE 150**  
CODE: 8100091



Max Breakaway:	<b>68 kg</b>
Full Saturation Thickness:	<b>6 mm</b>
2:1 Shear Working Load:	<b>6 kg</b>
Net Weight:	<b>1.3 kg</b>
Overall Height:	<b>68 mm</b>
Magnetic Pole Footprint:	<b>40 x 40 mm</b>

**BOOMERANGLE 400**  
CODE: 8100453



Max Breakaway:	<b>181 kg</b>
Full Saturation Thickness:	<b>3.43 mm</b>
2:1 Shear Working Load:	<b>9 kg</b>
Net Weight:	<b>3.0 kg</b>
Overall Height:	<b>181 mm</b>
Magnetic Pole Footprint:	<b>64 x 41.26 mm</b>

Magswitch Range

Magswitch No-Touch Tool Range

MSA and Magswitch Lifting Magnets

MSA Cable Safety Range

MSA Magnetic Workshop Clean-Up Range

MSA Welding Torch Holders

MSA Grip Grab Pot Magnets

## Magswitch Ground Clamps

### 300 AMP FINNED MAGNETIC GROUND CLAMP CODE: 8100746

Magnet Strength:	40 kg
Net Weight:	0.4 kg
Overall Height:	57.3 mm
Magnetic Pole Footprint:	40 Ø mm



### 600 AMP FINNED MAGNETIC GROUND CLAMP CODE: 8100747

Magnet Strength:	89 kg
Net Weight:	0.8 kg
Overall Height:	103 mm
Magnetic Pole Footprint:	69 Ø mm



### 800 AMP FINNED MAGNETIC GROUND CLAMP CODE: 8100552

Magnet Strength:	136 kg
Net Weight:	1.6 kg
Overall Height:	74 mm
Magnetic Pole Footprint:	89 Ø mm



## Magswitch Mag-Utility Hooks

### MAG-UTILITY HOOK 25 CODE: 8100012



Max Breakaway:	11 kg
Full Saturation Thickness:	3.05 mm
2:1 Shear Working Load:	9 kg
Net Weight:	0.2 kg
Overall Height:	89 mm
Magnetic Pole Footprint:	Ø 40 mm

### MAG-UTILITY HOOK 40 CODE: 8100006



Max Breakaway:	18 kg
Full Saturation Thickness:	25.4 mm
2:1 Shear Working Load:	12.5 kg
Net Weight:	0.8 kg
Overall Height:	103 mm
Magnetic Pole Footprint:	Ø 69 mm

## Magswitch Pivot Angles

### PIVOT ANGLE 150 MINI CODE: 81001269



Max Breakaway:	83 kg
Full Saturation Thickness:	4.8 mm
Max Safe Shear:	11 kg
Net Weight:	1 kg
Overall Height:	53.4 mm
Magnetic Pole Footprint:	26.4 x 54 mm

### PIVOT ANGLE 150 MAX CODE: 81001215



Max Breakaway:	83 kg
Full Saturation Thickness:	4.8 mm
Max Safe Shear:	11 kg
Net Weight:	1.5 kg
Overall Height:	53.4 mm
Magnetic Pole Footprint:	26.4 x 54 mm

Magswitch Range  
Magswitch No-Touch Tool Range  
MSA and Magswitch Lifting Magnets  
MSA Cable Safety Range  
MSA Magnetic Workshop Clean-Up Range  
MSA Welding Torch Holders  
MSA Grip Grab Pot Magnets

Magswitch Range  
Magswitch No-Touch Tool Range  
MSA and Magswitch Lifting Magnets  
MSA Cable Safety Range  
MSA Magnetic Workshop Clean-Up Range  
MSA Welding Torch Holders  
MSA Grip Grab Pot Magnets

## Magswitch MagMounts

**MAGMOUNT 150**  
CODE: 8100579



Max Breakaway:	<b>68 kg</b>
Full Saturation Thickness:	<b>2.5 mm</b>
2:1 Shear Working Load:	<b>4.8 kg</b>
Net Weight:	<b>0.4 kg</b>
Overall Height:	<b>32 mm</b>
Magnetic Pole Footprint:	<b>40 x 31.2 mm</b>

**MAGMOUNT 235**  
CODE: 8100451



Max Breakaway:	<b>106 kg</b>
Full Saturation Thickness:	<b>4.75 mm</b>
Net Weight:	<b>0.5 kg</b>
Overall Height:	<b>98 mm</b>
Magnetic Pole Footprint:	<b>56 x 42 mm</b>

**MAGMOUNT 300**  
CODE: 8100595



Max Breakaway:	<b>111 kg</b>
Full Saturation Thickness:	<b>4.75 mm</b>
Net Weight:	<b>0.5 kg</b>
Overall Height:	<b>43.8 mm</b>
Magnetic Pole Footprint:	<b>71.8 x 51.5 mm</b>

**MAGMOUNT 400**  
CODE: 8100523



Max Breakaway:	<b>182 kg</b>
Full Saturation Thickness:	<b>6 mm</b>
Net Weight:	<b>0.5 kg</b>
Overall Height:	<b>65 mm</b>
Magnetic Pole Footprint:	<b>64 x 41.26 mm</b>

**MAGMOUNT 600**  
CODE: 8100580



Max Breakaway:	<b>272 kg</b>
Full Saturation Thickness:	<b>10 mm</b>
2:1 Shear Working Load:	<b>27 kg</b>
Net Weight:	<b>1.5 kg</b>
Overall Height:	<b>72 mm</b>
Magnetic Pole Footprint:	<b>75 x 51.5 mm</b>

## Magswitch MagSquares

**MAGSQUARE 165**  
CODE: 8100494



Max Breakaway:	<b>68 kg</b>
Full Saturation Thickness:	<b>6.35 mm</b>
2:1 Shear Working Load:	<b>8.4 kg</b>
Net Weight:	<b>0.23 kg</b>
Overall Height:	<b>64.25 mm</b>
Magnetic Pole Footprint:	<b>48 x 31 mm</b>

**MAGSQUARE 600**  
CODE: 8100106



Max Breakaway:	<b>272 kg</b>
Full Saturation Thickness:	<b>10 mm</b>
2:1 Shear Working Load:	<b>27 kg</b>
Net Weight:	<b>1.36 kg</b>
Overall Height:	<b>106 mm</b>
Magnetic Pole Footprint:	<b>75 x 51.5 mm</b>

**MAGSQUARE 400**  
CODE: 8100238



Max Breakaway:	<b>181 kg</b>
Full Saturation Thickness:	<b>6 mm</b>
2:1 Shear Working Load:	<b>18 kg</b>
Net Weight:	<b>0.91 kg</b>
Overall Height:	<b>90 mm</b>
Magnetic Pole Footprint:	<b>64 x 41.26 mm</b>

**MAGSQUARE 1000**  
CODE: 8100099



Max Breakaway:	<b>454 kg</b>
Full Saturation Thickness:	<b>13 mm</b>
2:1 Shear Working Load:	<b>67 kg</b>
Net Weight:	<b>3.36 kg</b>
Overall Height:	<b>147 mm</b>
Magnetic Pole Footprint:	<b>72 x 108 mm</b>

Magswitch Range  
Magswitch No-Touch Tool Range  
MSA and Magswitch Lifting Magnets  
MSA Cable Safety Range  
MSA Magnetic Workshop Clean-Up Range  
MSA Welding Torch Holders  
MSA Grip Grab Pot Magnets

Magswitch Range  
Magswitch No-Touch Tool Range  
MSA and Magswitch Lifting Magnets  
MSA Cable Safety Range  
MSA Magnetic Workshop Clean-Up Range  
MSA Welding Torch Holders  
MSA Grip Grab Pot Magnets

## Magswitch Mini Angles

### MINI ANGLE CODE: 8100352



Max Breakaway:	<b>34.4 kg</b>
Full Saturation Thickness:	<b>3.05 mm</b>
2:1 Shear Working Load:	<b>2.7 kg</b>
Net Weight:	<b>0.18 kg</b>
Overall Height:	<b>55 mm</b>
Magnetic Pole Footprint:	<b>59.5 x 32 mm</b>

### MINI MULTI ANGLE CODE: 8100350



Max Breakaway:	<b>40 kg</b>
2:1 Shear Working Load:	<b>2.7 kg</b>
Net Weight:	<b>0.2 kg</b>
Overall Height:	<b>65 mm</b>
Magnetic Pole Footprint:	<b>32 x 72 mm</b>

### MINI MULTI ANGLE WITH 300 AMP GROUND CLAMP CODE: 8100351



Max Breakaway:	<b>67 kg</b>
Full Saturation Thickness:	<b>3.05 mm</b>
2:1 Shear Working Load:	<b>2.7 kg</b>
Net Weight:	<b>0.4 kg</b>
Overall Height:	<b>87 mm</b>
Magnetic Pole Footprint:	<b>90.5 x 44 mm</b>

### MINI MULTI ANGLE 400 CODE: 8100438



Max Breakaway:	<b>181 kg</b>
Full Saturation Thickness:	<b>3.43 mm</b>
2:1 Shear Working Load:	<b>9 kg</b>
Net Weight:	<b>1.2 kg</b>
Overall Height:	<b>95 mm</b>
Magnetic Pole Footprint:	<b>64 x 41.26 mm</b>

## Magswitch MagJigs

### MAGJIG 60 CODE: 8100818



Max Breakaway:	<b>27 kg</b>
2:1 Shear Working Load:	<b>7 kg</b>
Net Weight:	<b>0.1 kg</b>
Overall Height:	<b>44.6 mm</b>
Magnetic Pole Footprint:	<b>56 mm x 16 mm</b>

### MAGJIG 95 CODE: 8110004



Max Breakaway:	<b>43 kg</b>
2:1 Shear Working Load:	<b>4 kg</b>
Net Weight:	<b>0.1 kg</b>
Overall Height:	<b>46.62 mm</b>
Magnetic Pole Footprint:	<b>30 mm x 21 mm</b>

### MAGJIG 150 CODE: 8110005



Max Breakaway:	<b>60.3 kg</b>
2:1 Shear Working Load:	<b>6.8 kg</b>
Net Weight:	<b>0.2 kg</b>
Overall Height:	<b>52.12 mm</b>
Magnetic Pole Footprint:	<b>40 mm x 31 mm</b>

### MAGJIG 235 CODE: 8100377



Max Breakaway:	<b>106 kg</b>
Full Saturation Thickness:	<b>6 mm</b>
2:1 Shear Working Load:	<b>20 kg</b>
Net Weight:	<b>0.45 kg</b>
Overall Height:	<b>78 mm</b>
Magnetic Pole Footprint:	<b>56 mm x 41.25 mm</b>

### MAGJIG 60 KEYCHAIN CODE: 8100514



Max Breakaway:	<b>27 kg</b>
2:1 Shear Working Load:	<b>7 kg</b>
Net Weight:	<b>0.1 kg</b>
Overall Height:	<b>44.6 mm</b>
Magnetic Pole Footprint:	<b>56 mm x 16 mm</b>

Magswitch Range  
Magswitch No-Touch Tool Range  
MSA and Magswitch Lifting Magnets  
MSA Cable Safety Range  
MSA Magnetic Workshop Clean-Up Range  
MSA Welding Torch Holders  
MSA Grip Grab Pot Magnets

Magswitch Range  
Magswitch No-Touch Tool Range  
MSA and Magswitch Lifting Magnets  
MSA Cable Safety Range  
MSA Magnetic Workshop Clean-Up Range  
MSA Welding Torch Holders  
MSA Grip Grab Pot Magnets



**MAGSWITCH  
NO-TOUCH TOOL RANGE**

**Magswitch Hand Lifters**

**HAND LIFTER 60-M  
(MANUAL)**

CODE: 8100359



Max Breakaway:	106 kg
Full Saturation Thickness:	6 mm
2:1 Shear Working Load:	20 kg
Net Weight:	0.6 kg
Overall Height:	140 mm
Magnetic Pole Footprint:	56 x 41.25 mm

**FIXED SINGLE HAND  
LIFTER 235**

CODE: 8100795



Max Breakaway:	106 kg
Full Saturation Thickness:	4.75 mm
Net Weight:	0.7 kg
Overall Height:	105.1 mm
Magnetic Pole Footprint:	56 x 42 mm

**FIXED SINGLE HAND  
LIFTER 400**

CODE: 8100810



Max Breakaway:	177 kg
Full Saturation Thickness:	9.5 mm
Net Weight:	1.1 kg
Overall Height:	127 mm
Magnetic Pole Footprint:	67 x 42 mm

**HAND LIFTER 60-CE  
(CORDLESS ELECTRIC)  
W/ HOLSTER**

CODE: 8800487



Max Breakaway:	106 kg
Full Saturation Thickness:	6 mm
2:1 Shear Working Load:	20 kg
Net Weight:	1.1 kg
Overall Height:	106 mm
Magnetic Pole Footprint:	56 x 42 mm

**FIXED DUAL HAND  
LIFTER 235**

CODE: 8100821



Max Breakaway:	213 kg
Full Saturation Thickness:	4.75 mm
Net Weight:	1.9 kg
Overall Height:	111.4 mm
Magnetic Pole Footprint:	2 x (56 x 42) mm

**FIXED DUAL HAND  
LIFTER 400**

CODE: 8100822



Max Breakaway:	363 kg
Full Saturation Thickness:	9.5 mm
Net Weight:	2.7 kg
Overall Height:	133.3 mm
Magnetic Pole Footprint:	2 x (67 x 42) mm

Magswitch Range

Magswitch No-Touch Tool Range

MSA and Magswitch Lifting Magnets

MSA Cable Safety Range

MSA Magnetic Workshop Clean-Up Range

MSA Welding Torch Holders

MSA Grip Grab Pot Magnets

## Magswitch Mag Dolly

**MAG DOLLY**  
CODE: 8100433

Net Weight: 9.4 kg  
Overall Height: 917 mm



## Magswitch Extenda-Lifts



**EXTENDA-LIFT 600**  
CODE: 8100025

Max Breakaway: 272 kg  
Full Saturation Thickness: 50.8 mm  
2:1 Shear Working Load: 20.5 kg  
Net Weight: 2.4 kg  
Overall Height: 724 mm  
Magnetic Pole Footprint: 116.8 x 66 mm




**EXTENDA-LIFT 1000**  
CODE: 8130177

Max Breakaway: 454 kg  
Full Saturation Thickness: 13 mm  
2:1 Shear Working Load: 67 kg  
Net Weight: 4.4 kg  
Overall Height: 724 mm  
Magnetic Pole Footprint: 72 x 108 mm

## Magswitch MagReach

**MAGREACH 400**  
CODE: 81001594

Max Breakaway: 173 kg  
Full Saturation Thickness: 9.5 mm  
Max Shear: 35 kg  
Overall Adjustable Height: 160 – 2183 mm  
Net Weight: 3 kg

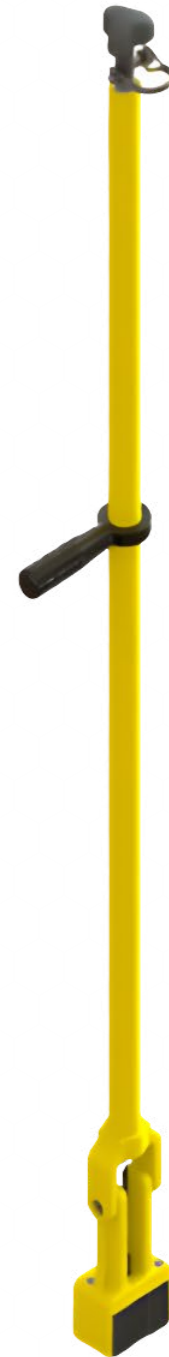

- Magswitch Range
- Magswitch No-Touch Tool Range
- MSA and Magswitch Lifting Magnets
- MSA Cable Safety Range
- MSA Magnetic Workshop Clean-Up Range
- MSA Welding Torch Holders
- MSA Grip Grab Pot Magnets

- Magswitch Range
- Magswitch No-Touch Tool Range
- MSA and Magswitch Lifting Magnets
- MSA Cable Safety Range
- MSA Magnetic Workshop Clean-Up Range
- MSA Welding Torch Holders
- MSA Grip Grab Pot Magnets





# MSA AND MAGSWITCH LIFTING MAGNETS


## MSA Pro-Lift Lifting Magnets

**PRO-LIFT LIFTING  
MAGNET 300KG**  
CODE: PL300




Max Breakaway:	900 kg
Safe Working Load:	300 kg
Full Saturation Thickness:	40 mm
Max Safe Shear:	N/A
Min. Thickness for De-stack:	40 mm
Net Weight:	10 kg

**PRO-LIFT LIFTING  
MAGNET 500KG**  
CODE: PL500

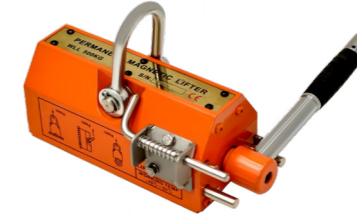

Max Breakaway:	1500 kg
Safe Working Load:	500 kg
Full Saturation Thickness:	40 mm
Max Safe Shear:	N/A
Min. Thickness for De-stack:	40 mm
Net Weight:	12.5 kg

**PRO-LIFT LIFTING  
MAGNET 600KG**  
CODE: PL600

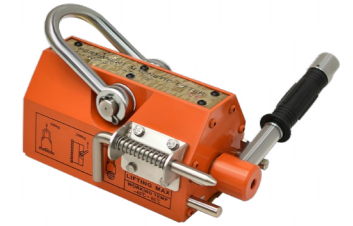

Max Breakaway:	1800 kg
Safe Working Load:	600 kg
Full Saturation Thickness:	50 mm
Max Safe Shear:	N/A
Min. Thickness for De-stack:	50 mm
Net Weight:	20 kg

**PRO-LIFT LIFTING  
MAGNET 1000KG**  
CODE: PL1000




Max Breakaway:	3000 kg
Safe Working Load:	1000 kg
Full Saturation Thickness:	60 mm
Max Safe Shear:	N/A
Min. Thickness for De-stack:	60 mm
Net Weight:	53 kg

**PRO-LIFT LIFTING  
MAGNET 2000KG**  
CODE: PL2000



Max Breakaway:	6000 kg
Safe Working Load:	2000 kg
Full Saturation Thickness:	70 mm
Max Safe Shear:	N/A
Min. Thickness for De-stack:	70 mm
Net Weight:	80 kg

**PRO-LIFT LIFTING  
MAGNET 3000KG**  
CODE: PL3000

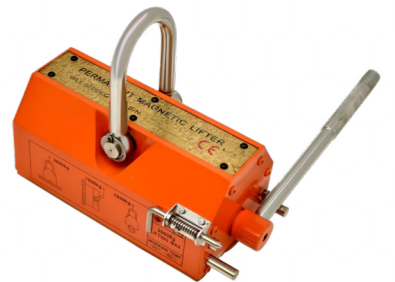

Max Breakaway:	9000 kg
Safe Working Load:	3000 kg
Full Saturation Thickness:	80 mm
Max Safe Shear:	N/A
Min. Thickness for De-stack:	80 mm
Net Weight:	160 kg

Magswitch  
Range

Magswitch No-Touch  
Tool Range

MSA and Magswitch  
Lifting Magnets

MSA Cable Safety  
Range

MSA Magnetic Workshop  
Clean-Up Range

MSA Welding  
Torch Holders

MSA Grip Grab  
Pot Magnets

## Magswitch MLAY Lifting Magnets

### MLAY600 LIFTING MAGNET CODE: 810089




Max Breakaway:	272 kg
Safe Working Load:	90 kg
Full Saturation Thickness:	9.5 mm
Max Safe Shear:	31.8 kg
Min. Thickness for De-stack:	9.5 mm
Net Weight:	2.0 kg

### MLAY600X2 LIFTING MAGNET CODE: 8100360



Max Breakaway:	500 kg
Safe Working Load:	167 kg
Full Saturation Thickness:	9.5 mm
Max Safe Shear:	90.9 kg
Min. Thickness for De-stack:	9.5 mm
Net Weight:	4.3 kg

### MLAY600X4 LIFTING MAGNET CODE: 8100364



Max Breakaway:	1036 kg
Safe Working Load:	346 kg
Full Saturation Thickness:	9.5 mm
Max Safe Shear:	150 kg
Min. Thickness for De-stack:	9.5 mm
Net Weight:	8.1 kg

### MLAY 1000 LIFTING MAGNET CODE: 8100088



Max Breakaway:	454 kg
Safe Working Load:	151 kg
Full Saturation Thickness:	12.7 mm
Max Safe Shear:	22.7 kg
Min. Thickness for De-stack:	12.7 mm
Net Weight:	15.2 kg

## Magswitch MLAY Lifting Magnets

### MLAY 1000X2 LIFTING MAGNET CODE: 8100484



Max Breakaway:	907 kg
Safe Working Load:	303 kg
Full Saturation Thickness:	12.7 mm
Max Safe Shear:	57 kg
Min. Thickness for De-stack:	19.1 mm
Net Weight:	10.8 kg

### MLAY 1000X4 LIFTING MAGNET CODE: 8100418



Max Breakaway:	1654 kg
Safe Working Load:	551 kg
Full Saturation Thickness:	19.05 mm
Max Safe Shear:	128.6 kg
Min. Thickness for De-stack:	19.05 mm
Net Weight:	20.5 kg

### MLAY 1000X3 LIFTING MAGNET CODE: 8100403



Max Breakaway:	1242 kg
Safe Working Load:	414 kg
Full Saturation Thickness:	12.7 mm
Max Safe Shear:	90 kg
Min. Thickness for De-stack:	12.7 mm
Net Weight:	16.6 kg

### MLAY 1000X6 LIFTING MAGNET CODE: 8100482



Max Breakaway:	2761.4 kg
Safe Working Load:	922.6 kg
Full Saturation Thickness:	25.4 mm
Max Safe Shear:	279.8 kg
Min. Thickness for De-stack:	25.4 mm
Net Weight:	27.3 kg

Magswitch Range  
Magswitch No-Touch Tool Range  
MSA and Magswitch Lifting Magnets  
MSA Cable Safety Range  
MSA Magnetic Workshop Clean-Up Range  
MSA Welding Torch Holders  
MSA Grip Grab Pot Magnets

Magswitch Range  
Magswitch No-Touch Tool Range  
MSA and Magswitch Lifting Magnets  
MSA Cable Safety Range  
MSA Magnetic Workshop Clean-Up Range  
MSA Welding Torch Holders  
MSA Grip Grab Pot Magnets

## Magswitch CE Magnetic Lifters

### CE 1100 MAGNETIC LIFTER CODE: 8140977

Max Breakaway:	1500 kg
Breakaway force @ 3:1 SWL:	500 kg
Net Weight:	25 kg



### CE 2100 MAGNETIC LIFTER CODE: 8140978

Max Breakaway:	2850 kg
Breakaway force @ 3:1 SWL:	950 kg
Net Weight:	41 kg



## Magswitch CE Magnetic Lifters

### CE 6600 MAGNETIC LIFTER CODE: 8140979

Max Breakaway:	9000 kg
Breakaway force @ 3:1 SWL:	3000 kg
Net Weight:	190 kg



## CE 6600 MAGNETIC LIFTER



Magswitch Range

Magswitch No-Touch Tool Range

MSA and Magswitch Lifting Magnets

MSA Cable Safety Range

MSA Magnetic Workshop Clean-Up Range

MSA Welding Torch Holders

MSA Grip Grab Pot Magnets



Magswitch Range

Magswitch No-Touch Tool Range

MSA and Magswitch Lifting Magnets

MSA Cable Safety Range

MSA Magnetic Workshop Clean-Up Range

MSA Welding Torch Holders

MSA Grip Grab Pot Magnets



**MSA Cable Safety Range**

**FRAS CABLE-MATE**

CODE: MSAFCM10

Supports Weight: 25 kg (±5%)

Dimensions: 100 x 220 mm



**CABLE-MATE**

CODE: MSACM10

Supports Weight: 25 kg (±5%)

Dimensions: 120 x 250 mm



**CABLE-BUDDY**

CODE: MSACB10

Supports Weight: 5 kg (±5%)

Dimensions: 30 x 120 mm



**POWR-SAFE**

CODE: MSAPS10

Supports Weight: 12 kg (±5%)

Dimensions: 88 Ø x 125 mm



**MSA CABLE SAFETY RANGE**

Magswitch Range

Magswitch No-Touch Tool Range

MSA and Magswitch Lifting Magnets

MSA Cable Safety Range

MSA Magnetic Workshop Clean-Up Range

MSA Welding Torch Holders

MSA Grip Grab Pot Magnets


**MSA Magnetic Workshop Wands**

**MAGNETIC WORKSHOP WAND  
350MM LONG**  
CODE: MSAWW350

Length: 350 mm  
Diameter: 25 mm

**MAGNETIC WORKSHOP WAND  
900MM LONG**  
CODE: MSAWW900

Length: 900 mm  
Diameter: 25 mm

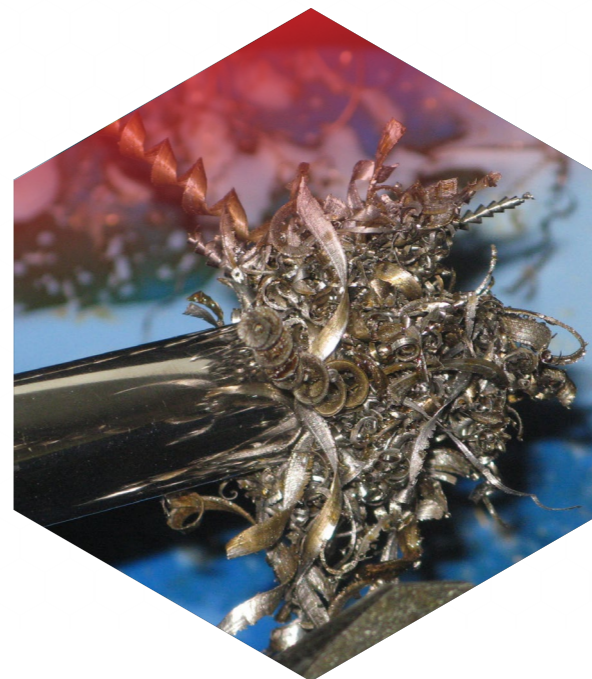

**MSA MAGNETIC  
WORKSHOP  
CLEAN-UP RANGE**

Magswitch  
Range

Magswitch No-Touch  
Tool Range

MSA and Magswitch  
Lifting Magnets

MSA Cable Safety  
Range

MSA Magnetic Workshop  
Clean-Up Range

MSA Welding  
Torch Holders

MSA Grip Grab  
Pot Magnets

## MSA Magnetic Super Sweepers

**SUPER SWEEPER - 18"**  
CODE: MSASS18



**SUPER SWEEPER - 24"**  
CODE: MSASS24



Width: 457.20 mm  
Height: 850 – 1200 mm with adjustable handle  
Box Dimensions: 780L x 220W x 220H mm  
Box Weight: 7 kg

Width: 609.20 mm  
Height: 850 – 1200 mm with adjustable handle  
Box Dimensions: 870L x 220W x 220H mm  
Box Weight: 7 kg


## MSA Magnetic Forklift Sweepers

**FORKLIFT SWEEPER - 36"**  
CODE: MSAFS36



Product Dimension: 914.4W x 160H mm  
Box Dimensions: 960L x 130W x 230H mm  
Box Weight: 8 kg

**FORKLIFT SWEEPER - 72"**  
CODE: MSAFS72

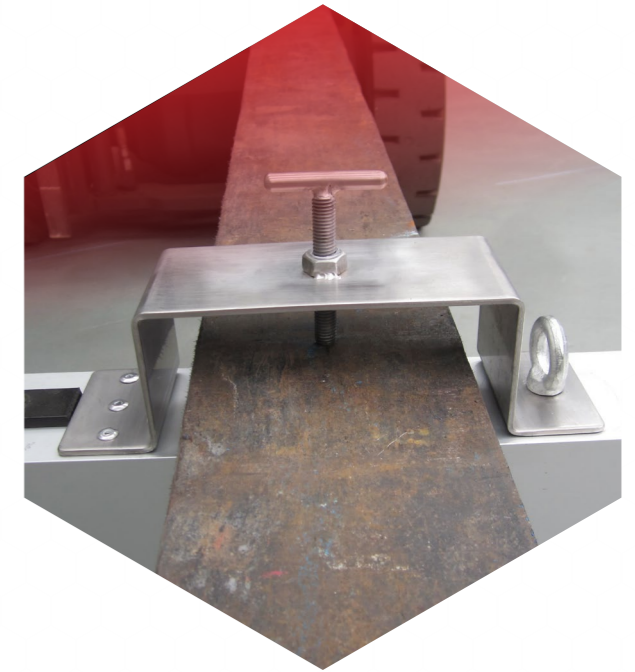

Product Dimension: 1828.8W x 160H mm  
Box Dimensions: 1850L x 130W x 230H mm  
Box Weight: 15 kg

- Magswitch Range
- Magswitch No-Touch Tool Range
- MSA and Magswitch Lifting Magnets
- MSA Cable Safety Range
- MSA Magnetic Workshop Clean-Up Range
- MSA Welding Torch Holders
- MSA Grip Grab Pot Magnets

- Magswitch Range
- Magswitch No-Touch Tool Range
- MSA and Magswitch Lifting Magnets
- MSA Cable Safety Range
- MSA Magnetic Workshop Clean-Up Range
- MSA Welding Torch Holders
- MSA Grip Grab Pot Magnets



**MSA  
WELDING TORCH  
HOLDERS**

**MSA Welding Torch Holders**

**MIG-MATE**  
CODE: MSAMIGM

Height:	130 mm
Weight:	763 g
Magnetic Base:	Ø 88 mm



**TIG-MATE**  
CODE: MSATIGM

Height:	185 mm
Weight:	723 g
Magnetic Base:	Ø 88 mm



Magswitch Range

Magswitch No-Touch Tool Range

MSA and Magswitch Lifting Magnets


MSA Cable Safety Range

MSA Magnetic Workshop Clean-Up Range

MSA Welding Torch Holders


MSA Grip Grab Pot Magnets

**A-Series - CSK Centre Hole**

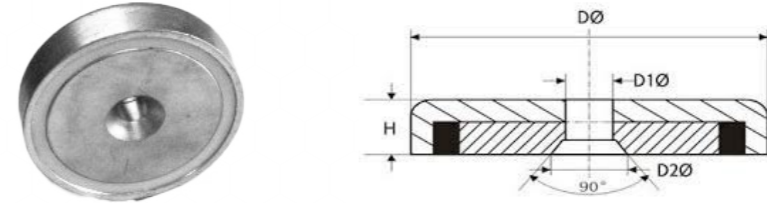

Part#	D (mm)	D1 (mm)	D2 (mm)	H (mm)	Attraction (kg)	DeadWeight (g)
MSAA16	16	3.5	6.5	5	5	7
MSAA20	20	4.5	8.5	7	6	13
MSAA25	25	5.5	10.4	8	14	23
MSAA32	32	5.5	10.4	8	25	39
MSAA36	36	6.5	12	9	29	52
MSAA42	42	6.5	12	9	37	76
MSAA48	48	8.5	16	11.5	68	120
MSAA60	60	8.5	16	15	112	252
MSAA75	75	10.5	19	18	162	488

**B-Series - Straight Hole**

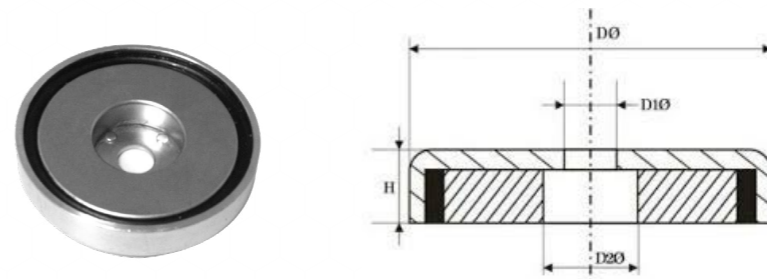


Part#	D (mm)	D1 (mm)	D2 (mm)	H (mm)	Attraction (kg)	DeadWeight (g)
MSAB16	16	3.5	6.5	5	4	6
MSAB20	20	4.5	8	7	6	12
MSAB25	25	5.5	9	8	14	23
MSAB32	32	5.5	9	8	23	36
MSAB36	36	6.5	11	9	29	50
MSAB42	42	6.5	11	9	32	73
MSAB48	48	8.5	15	11.5	63	114
MSAB60	60	8.5	15	15	95	240
MSAB75	75	10.5	18	18	155	471
MSAB88	88	12.5	20	20	180	480

**MSA**  
**GRIP GRAB**  
**POT MAGNETS**

**HIGH GRADE NEODYMIUM**  
*The Strongest Magnet Found in Nature!*




### C-Series - Male Thread

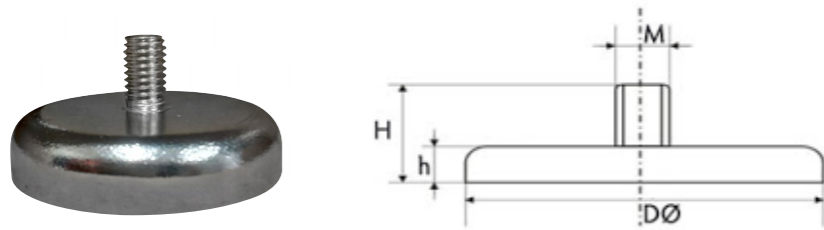


Part#	D (mm)	D1 (mm)	D2 (mm)	H (mm)	Attraction (kg)	DeadWeight (g)
MSAC10	10	3	12	5	2.2	3.5
MSAC16	16	4	13	5	5.5	7.5
MSAC20	20	4	15	7	9	16
MSAC25	25	5	17	8	22	30
MSAC32	32	6	18	8	34	45
MSAC36	36	6	18	8	41	57
MSAC42	42	6 or 8	20	9	68	84
MSAC48	48	8	24	11.5	81	130
MSAC60	60	8	30	15	113	254
MSAC75	75	10	34	15	164	550

### D-Series - Female Threaded Boss

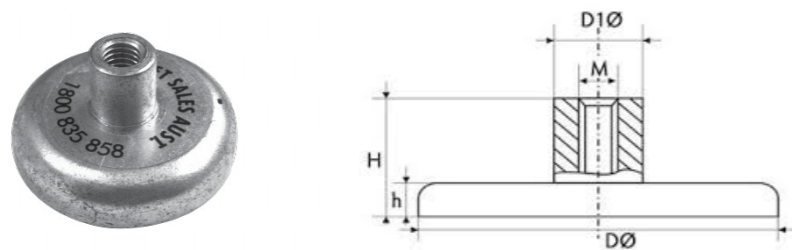

Part#	D (mm)	D1 (mm)	D2 (mm)	H (mm)	Attraction (kg)	DeadWeight (g)
MSAD10	10	3	12	5	2.2	3.5
MSAD16	16	4	13	5	5.5	8
MSAD20	20	4	15	7	9	17
MSAD25	25	5	17	8	22	32
MSAD32	32	6	18	8	34	47
MSAD36	36	6	18	8	41	59
MSAD42	42	6	20	9	68	87
MSAD48	48	8	24	11.5	81	132
MSAD60	60	8	30	15	113	270
MSAD75	75	10	34	18	164	552

### E-Series - Complete with Hook

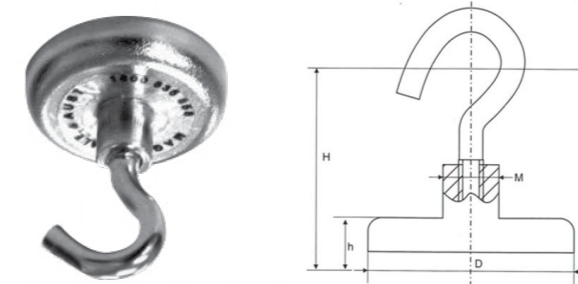

Part#	D (mm)	D1 (mm)	D2 (mm)	H (mm)	Attraction (kg)	DeadWeight (g)
MSAE16	16	4	14	5	5.5	11
MSAE20	20	4	14	7	9	21
MSAE25	25	5	17	8	22	32
MSAE32	32	6	16	8	34	56
MSAE36	36	6	16	8	41	68
MSAE42	42	6	16	9	68	97
MSAE48	48	8	23	11.5	81	154
MSAE60	60	8	23	15	113	282
MSAE75	75	10	25	18	164	560

Magswitch Range  
Magswitch No-Touch Tool Range  
MSA and Magswitch Lifting Magnets  
MSA Cable Safety Range  
MSA Magnetic Workshop Clean-Up Range  
MSA Welding Torch Holders  
MSA Grip Grab Pot Magnets

Magswitch Range  
Magswitch No-Touch Tool Range  
MSA and Magswitch Lifting Magnets  
MSA Cable Safety Range  
MSA Magnetic Workshop Clean-Up Range  
MSA Welding Torch Holders  
MSA Grip Grab Pot Magnets



**MSA MAGNETICS**

**Head Office**

4 Prince of Wales Ave,  
Unanderra NSW 2526

**1800 466 246**

[sales@msamagnetics.com.au](mailto:sales@msamagnetics.com.au)

[www.msamagnetics.com.au](http://www.msamagnetics.com.au)

ABN 59 171 188 983

***YOUR SOURCE FOR FORCE***