



Self-Aligning Ball Bearings

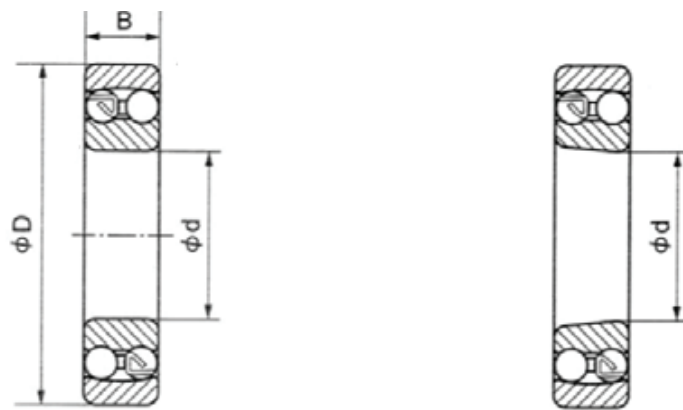

Part No.		d (mm)	D (mm)	B (mm)	Dynamic load (kN)	Static load (kN)	N.W. (kg)
Cylindrical bore	Tapered bore						
1200	-	10	30	9	5.5	1.2	0.034
1201	-	12	32	10	5.6	1.3	0.040
1202	-	15	35	11	7.5	1.8	0.049
1203	-	17	40	12	7.9	2.0	0.073
1204	1204K	20	47	14	9.9	2.6	0.120
1205	1205K	25	52	15	12.1	3.3	0.141
1206	1206K	30	62	16	15.6	4.7	0.220
1207	1207K	35	72	17	15.8	5.1	0.323
1208	1208K	40	80	18	19.2	6.5	0.417
1209	1209K	45	85	19	21.8	7.4	0.465
1210	1210K	50	90	20	22.7	8.1	0.525
1211	1211K	55	100	21	26.8	10.0	0.705
1212	1212K	60	110	22	30.2	11.5	0.900
1213	1213K	65	120	23	31.0	12.5	1.150
1214	1214K	70	125	24	34.6	13.8	1.260
1215	1215K	75	130	25	39.0	15.7	1.360
1216	1216K	80	140	26	39.5	17.0	1.670
1217	1217K	85	150	28	49.0	20.7	2.070
1218	1218K	90	160	30	57.0	23.4	2.520
1219	1219K	95	170	32	64.0	27.1	8.100
1220	1220K	100	180	34	69.0	29.7	3.700
1304	1304K	20	52	15	12.4	3.3	0.163
1305	1305K	25	62	17	18.0	5.0	0.257
1306	1306K	30	72	19	21.3	6.3	0.387
1307	1307K	35	80	21	25.1	7.9	0.510
1308	1308K	40	90	23	29.5	9.7	0.715
1309	1309K	45	100	25	38.1	12.7	0.957

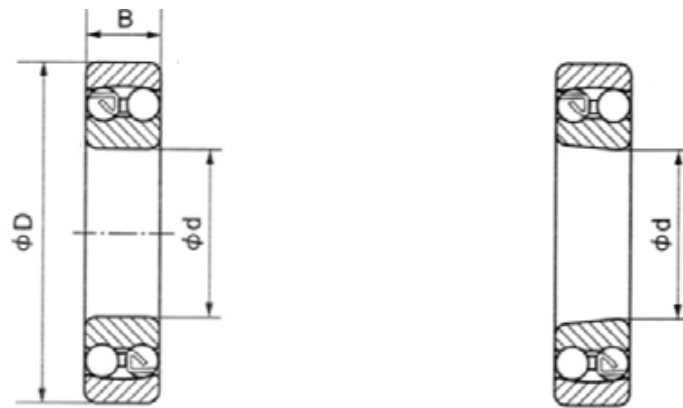

Part No.		d (mm)	D (mm)	B (mm)	Dynamic load (kN)	Static load (kN)	N.W. (kg)
Cylindrical bore	Tapered bore						
1310	1310K	50	110	27	43.4	14.1	1.210
1311	1311K	55	120	29	51.3	17.9	1.580
1312	1312K	60	130	31	57.2	20.8	1.960
1313	1313K	65	140	33	62.0	22.8	2.450
2206	2206K	30	62	20	15.6	4.7	0.260
2207	2207K	35	72	23	21.6	6.6	0.403
2208	2208K	40	80	23	22.4	7.4	0.505
2209	2209K	45	85	23	23.3	8.2	0.545
2210	2210K	50	90	23	23.3	8.5	0.590
2211	2211K	55	100	25	26.8	10.0	0.810
2212	2212K	60	110	28	34.1	12.6	1.090
2213	2213K	65	120	31	43.5	16.4	1.460
2214	2214K	70	125	31	39.6	16.4	1.520
2215	2215K	75	130	31	44.0	17.8	1.620
2216	2216K	80	140	33	49.0	19.9	2.040
2217	2217K	85	150	36	58.0	23.5	2.520
2218	2218K	90	160	40	70.0	28.6	3.430
2219	2219K	95	170	43	83.5	34.5	4.180
2220	2220K	100	180	46	94.0	38.5	4.980
2222	2222K	110	200	53	125.0	52.0	7.200

