



Part No.	d (mm)	D (mm)	B (mm)	Dynamic load (kN)	Static load (kN)	N.W. (kg)
30202	15	35	11.75	14.5	15.8	0.053
30203	17	40	13.25	20.2	20.4	0.070
30204	20	47	15.25	29.5	30.5	0.120
30205	25	52	16.25	31.5	33.7	0.152
30206	30	62	17.25	43.5	48.0	0.220
30207	35	72	18.25	54.5	60.5	0.320
30208	40	80	19.75	63.5	70.5	0.420
30209	45	85	20.75	69.5	81.5	0.470
30210	50	90	21.75	79.0	96.0	0.530
30211	55	100	22.75	94.5	113.0	0.690
30212	60	110	23.75	104.0	123.0	0.860
30213	65	120	24.75	128.0	156.0	1.160
30214	70	125	26.25	138.0	173.0	1.300
30215	75	130	27.25	142.0	181.0	1.390
30216	80	140	28.25	161.0	202.0	1.680
30217	85	150	30.50	182.0	231.0	2.120
30218	90	160	32.50	204.0	261.0	2.600
30219	95	170	34.50	231.0	299.0	3.140
30220	100	180	37.00	258.0	338.0	3.760
30221	105	190	39.00	247.0	310.0	4.150
30222	110	200	41.00	310.0	415.0	5.000
30224	120	215	43.50	325.0	440.0	6.010
30226	130	230	43.75	375.0	505.0	7.250
30228	140	250	45.75	370.0	490.0	5.200
30302	15	42	14.25	19.2	21.9	0.095
30303	17	47	15.25	27.6	30.0	0.130
30304	20	52	16.25	35.0	35.5	0.170

Taper Roller Bearings - Metric Series

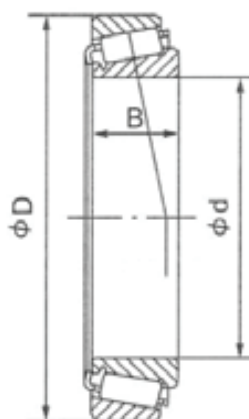


Part No.	d (mm)	D (mm)	B (mm)	Dynamic load (kN)	Static load (kN)	N.W. (kg)
30305	25	62	18.25	48.2	46.9	0.265
30306	30	72	20.75	59.6	60.1	0.399
30307	35	80	22.75	76.0	79.0	0.540
30308	40	90	25.25	90.6	101.0	0.756
30309	45	100	27.25	113.0	128.0	0.999
30310	50	110	29.25	137.0	152.0	1.290
30311	55	120	31.50	148.0	170.0	1.560
30312	60	130	33.50	173.0	201.0	2.030
30313	65	140	36.00	204.0	239.0	2.520
30314	70	150	38.00	230.0	276.0	3.050
30315	75	160	40.00	250.0	297.0	3.520
30316	80	170	42.50	290.0	350.0	4.050
30317	85	180	44.50	260.0	298.0	4.740
30318	90	190	46.50	288.0	330.0	5.550
30319	95	200	49.50	330.0	390.0	6.550
30320	100	215	51.50	365.0	430.0	8.000
30322	110	240	54.50	400.0	465.0	10.500
30324	120	260	59.50	460.0	545.0	13.500
31308	40	90	25.25	80.5	90.2	0.744
31309	45	100	27.25	95.1	107.0	0.964
31310	50	110	29.25	115.0	133.0	1.240
31311	55	120	31.5	129.0	148.0	1.580
31312	60	130	33.5	153.0	179.0	1.990
31313	65	140	36	176.0	209.0	2.430
31315	75	160	40	218.0	261.0	3.400
31316	80	170	42.5	236.0	283.0	4.000
31318	90	190	46.5	252.0	297.0	5.400

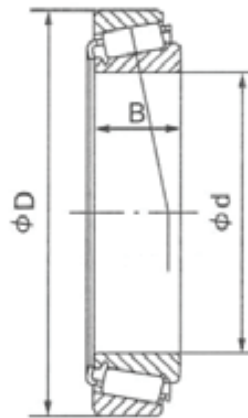


Part No.	d (mm)	D (mm)	B (mm)	Dynamic load (kN)	Static load (kN)	N.W. (kg)
31319	95	200	49.5	310.0	400.0	6.450
31320	100	215	56.5	288.0	330.0	7.900
32004X	20	42	15	25.1	28.2	0.10
32005X	25	47	15	28.0	34.0	0.11
320/328X	28	52	16	31.4	40.4	0.14
32006X	30	55	17	37.5	46.5	0.17
32007X	35	62	18	44.5	57.5	0.22
32008X	40	68	19	52.5	71.5	0.27
32009X	45	75	20	59.5	86.0	0.34
32010X	50	80	20	62.0	90.5	0.37
32011X	55	90	23	82.5	122.0	0.55
32012X	60	95	23	86.1	127.0	0.61
32013X	65	100	23	90.0	137.0	0.65
32014X	70	110	25	108.0	163.0	0.87
32015X	75	115	25	110.0	169.0	0.91
32016X	80	125	29	147.0	225.0	1.29
32017X	85	130	29	150.0	234.0	1.36
32018X	90	140	32	178.0	267.0	1.76
32019X	95	145	32	182.0	287.0	1.84
32020X	100	150	32	185.0	298.0	1.92
32021X	105	160	35	204.0	330.0	2.42
32022X	110	170	38	235.0	360.0	3.06
32024X	120	180	38	241.0	400.0	3.24
32026X	130	200	45	315.0	530.0	3.93
32028X	140	210	45	320.0	540.0	5.23
32030X	150	225	48	370.0	645.0	6.35
32204	20	47	19.25	27.5	28.0	0.23


Taper Roller Bearings - Metric Series

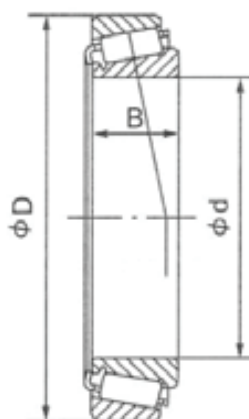


Part No.	d (mm)	D (mm)	B (mm)	Dynamic load (kN)	Static load (kN)	N.W. (kg)
32206	30	62	21.25	53.0	61.5	0.28
32207	35	72	24.25	70.0	86.0	0.43
32208	40	80	24.75	78.0	91.5	0.53
32209	45	85	24.75	83.5	102.0	0.58
32210	50	90	24.75	88.5	111.0	0.61
32211	55	100	26.75	110.0	137.0	0.83
32212	60	110	29.75	131.0	167.0	1.14
32213	65	120	32.75	156.0	200.0	1.50
32214	70	125	33.25	157.0	205.0	1.61
32215	75	130	33.25	165.0	221.0	1.70
32216	80	140	35.25	192.0	254.0	2.04
32217	85	150	38.50	212.0	280.0	2.61
32218	90	160	42.50	255.0	345.0	3.36
32219	95	170	45.50	285.0	390.0	4.06
32220	100	180	49.00	315.0	465.0	4.99
32221	105	190	53.00	360.0	510.0	5.90
32222	110	200	56.00	395.0	565.0	6.90
32224	120	215	61.50	420.0	600.0	8.45
32226	130	230	67.75	480.0	690.0	10.40
32228	140	250	71.75	560.0	815.0	13.20
32230	150	270	77.00	610.0	900.0	16.80
32303	17	47	20.25	30.5	35.9	0.170
32304	20	52	22.25	45.1	46.7	0.239
32305	25	62	25.25	61.2	64.1	0.378
32306	30	72	28.75	82.2	91.6	0.579
32307	35	80	32.75	101.0	114.0	0.758
32308	40	90	35.25	116.0	139.0	1.040

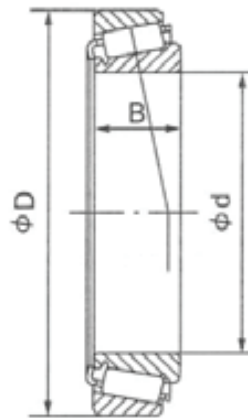

Part No.	d (mm)	D (mm)	B (mm)	Dynamic load (kN)	Static load (kN)	N.W. (kg)
32309	45	100	38.25	146.0	180.0	1.400
32310	50	110	42.25	176.0	220.0	1.860
32311	55	120	45.50	200.0	250.0	2.350
32312	60	130	48.50	232.0	295.0	2.860
32313	65	140	51.00	276.0	357.0	3.640
32314	70	150	54.00	317.0	414.0	4.430
32315	75	160	58.00	355.0	470.0	5.220
32316	80	170	61.50	380.0	500.0	6.120
32317	85	180	63.50	410.0	540.0	6.800
32318	90	190	67.50	395.0	500.0	8.050
32319	95	200	71.50	450.0	585.0	11.000
32320	100	215	77.50	465.0	670.0	14.900
32907	35	55	14	26.2	40.0	0.13
32908	40	62	15	32.0	46.0	0.18
32909	45	68	15	34.5	57.0	0.20
32910	50	72	15	35.5	60.5	0.21
32911	55	80	17	47.0	77.0	0.31
32912	60	85	17	45.5	76.0	0.33
32913	65	90	17	49.5	87.0	0.36
32914	70	100	20	70.5	114.0	0.53
33007	35	62	21	46.0	71.0	0.52
33008	40	68	22	59.0	82.0	0.33
33009	45	75	24	64.5	99.0	0.44
33010	50	80	24	67.0	107.0	0.45
33011	55	90	27	86.5	140.0	0.70
33012	60	95	27	92.5	148.0	0.73
33013	65	100	27	98.0	160.0	0.78

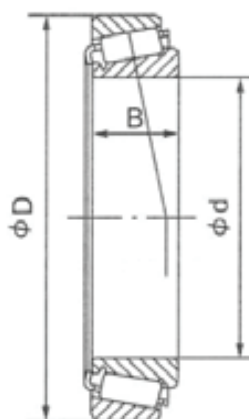

Part No.	d (mm)	D (mm)	B (mm)	Dynamic load (kN)	Static load (kN)	N.W. (kg)
33014	70	110	31	126.0	198.0	1.10
33015	75	115	31	129.0	206.0	1.15
33016	80	125	36	157.0	277.0	1.65
33017	85	130	36	172.0	285.0	1.74
33018	90	140	39	216.0	355.0	2.20
33019	95	145	39	226.0	382.0	2.29
33020	100	150	39	231.0	397.0	2.39
33021	105	160	43	240.0	400.0	3.05
33022	110	170	47	273.0	465.0	3.89
33024	120	180	48	281.0	495.0	4.20
33026	130	200	55	390.0	720.0	6.44
33108	40	75	26	77.5	102.0	0.52
33109	45	80	26	79.5	108.0	0.56
33110	50	85	26	84.5	120.0	0.60
33111	55	95	30	114.0	161.0	0.86
33112	60	100	30	117.0	166.0	0.94
33113	65	110	34	152.0	223.0	1.30
33116	80	130	37	191.0	294.0	1.90
33118	90	150	45	258.0	413.0	3.13
33205	25	52	22	47.0	56.0	0.22
33206	30	62	25	66.0	79.0	0.35
33207	35	72	28	86.7	107.0	0.54
33208	40	80	32	108.0	139.0	0.75
33209	45	85	32	112.0	149.0	0.80
33210	50	90	32	118.0	165.0	0.86
33211	55	100	35	141.0	193.0	1.18
33212	60	110	38	131.0	167.0	1.56

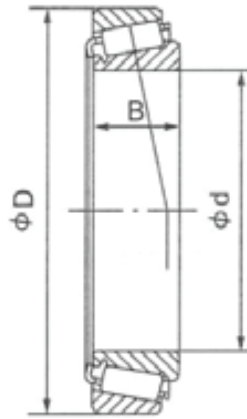

Part No.	d (mm)	D (mm)	B (mm)	Dynamic load (kN)	Static load (kN)	N.W. (kg)
33213	65	120	41	200.0	277.0	2.01
33214	70	125	41	209.0	299.0	2.10
33215	75	130	41	182.0	275.0	2.30
33216	80	140	46	256.0	385.0	2.90
33217	85	150	49	294.0	439.0	3.62
33218	90	160	55	330.6	499.7	4.69
33219	95	170	58	377.4	568.4	5.48
33220	100	180	63	436.5	666.2	6.40

