

FLAT BAR ANCHOR MBS 15KN

SPECIFICATION FOR 915155

AUSTLIFT Flat Bar Anchors (915155) are designed for Temporary Anchorage requirements. Suitable for temporary access to roofs for maintenance or installation requirements.

Features

- AUSTLIFT Flat Bar Anchor (915155) provides simple and effective way for roof access onto sheet metal roofs.
- Temporary and reusable alternative to installation of a permanent Purlin style anchor
- Can be used as a temporary anchor point in applications along a roof line where no permanent anchor point exists.
- Quick installation and removal. (Installation should always be conducted by a competent person.)
- Suitable for Trapezoidal and Custom Orb Roof profiles



How To Use

Refer to User Instruction Manual

Metal Components

Material : High Strength Alloy Steel
 Finish : ED Coated Black
 Minimum Breaking Strength : 15kN

Weight


1.27kg ± 0.01 kg

System Strength

15kN MBS

Relevant Standards

Confirms to EN 795:2012 Type A & AS / NZS 5532:2013

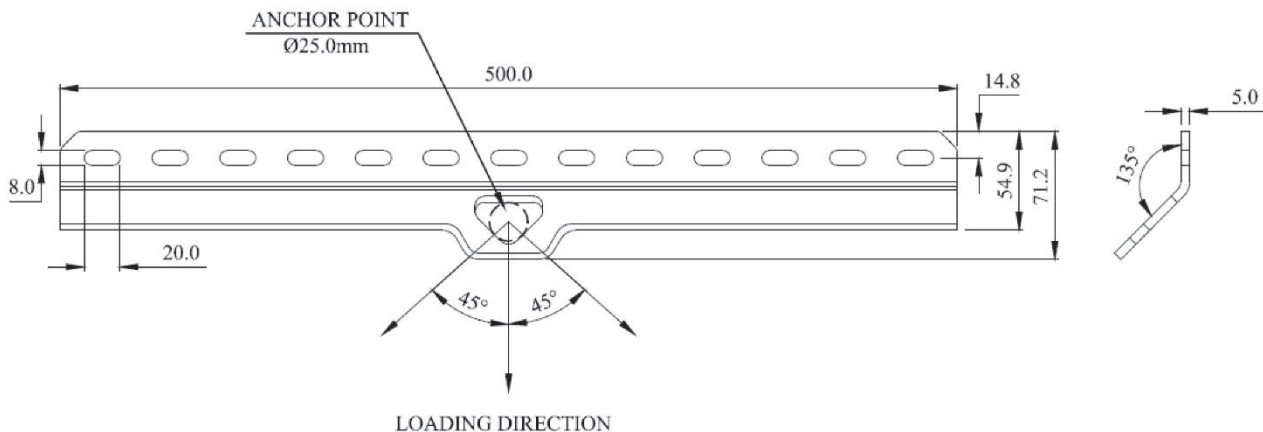

AUSTLIFT Lifting your business to a higher level.

NSW Head Office

43 Frank Street
 Wetherill Park, NSW 2164
 02 9757 2277

WA Office

42 Mulgal Road
 Malaga, WA 6090
 08 9248 6674

QLD Office

7 Durbell Street
 Acacia Ridge, QLD 4110
 07 3272 0777

VIC Office

475 Dohertys Road
 Truganina, VIC 3029
 03 9314 5525