


Abrasive film, active coated, self fastening,
waterproof

FP 73 WK

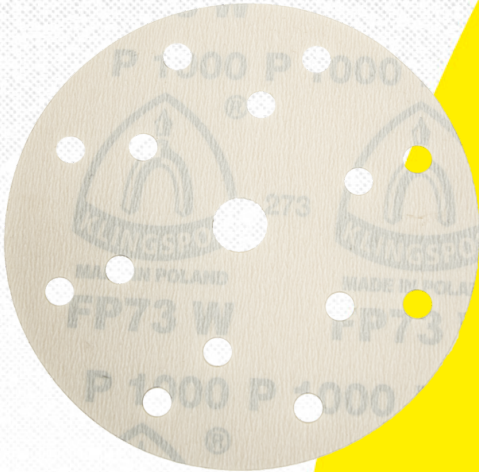

Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	Foil

Product benefit

Special product with highly tear-resistant film backing for use on paint, varnish and fillers - Very good adaptation of the discs with excellent grit adhesion also in the edge area - Substantially reduced clogging and significantly longer service life

Materials

Paint/Varnish/Filler	●
Plastic	○

Applications

- ▶ Automotive industry
- ▶ Vehicle maintenance
- ▶ Paint shops
- ▶ Wood processing industry
- ▶ Furniture industry
- ▶ Boat and shipbuilding

Available grits:

16	20	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	3000	5000	8000
----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------

Diameter in mm	grain	Hole pattern	type of coat.abras.	Packing unit/pcs.	Cat. number
150	80	⊗ GLS 47	FP 73 WK	100	320641
150	120	⊗ GLS 47	FP 73 WK	100	320643
150	180	⊗ GLS 47	FP 73 WK	100	320725
150	320	⊗ GLS 47	FP 73 WK	100	320727

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de

