

Abrasive fibre disc

FS 964 ACT



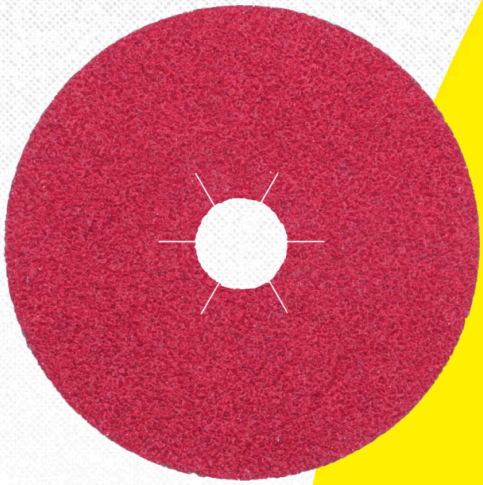

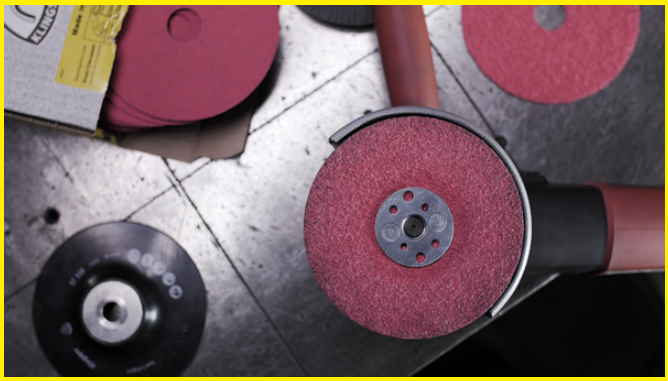

Properties

Bonding agent	Resin
Grain	Ceramic Al. oxide
Coating	Close

Materials

Steel	●
Stainless steel	●

Product benefit

Premium product with excellent performance for working on steel - Micro-crystalline self-sharpening effect - High aggressiveness thanks to self-sharpening, aggressive ceramic grains throughout the service life - Outstanding grit adhesion - Advanced Coating Technology (ACT) for extraordinary grain adhesion and extended service life

Applications

- Steel construction
- Pipeline construction
- Apparatus and container manufacturing

Available grits:

16 20 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Diameter x Hole in mm	Hole pattern	grain	Vmax m/s	Max. RPM	type of coat.abras.	bore shape	Packing unit/pcs.	Cat. number
125 x 22	⊛ 30	24	80 m/s	12250 rpm	FS 964	star shaped hole	25	330484
125 x 22	⊛ 30	36	80 m/s	12250 rpm	FS 964	star shaped hole	25	330485
125 x 22	⊛ 30	60	80 m/s	12250 rpm	FS 964	star shaped hole	25	330487
125 x 22	⊛ 30	80	80 m/s	12250 rpm	FS 964	star shaped hole	25	330490

Klingspor Schleifsysteme GmbH und Co. KG
Hüttenstraße 36 - 35708 Haiger - Germany
Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186
sales@klingspor.de - www.klingspor.de

Diameter x Hole in mm	Hole pattern	grain	Vmax m/s	Max. RPM	type of coat.abras.	bore shape	Packing unit/pcs.	Cat. number
125 x 22	⊛ 30	120	80 m/s	12250 rpm	FS 964	star shaped hole	25	330491
180 x 22	⊛ 30	24	80 m/s	8500 rpm	FS 964	star shaped hole	25	330489
180 x 22	⊛ 30	36	80 m/s	8500 rpm	FS 964	star shaped hole	25	330492
180 x 22	⊛ 30	60	80 m/s	8500 rpm	FS 964	star shaped hole	25	330495

Klingspor Schleifsysteme GmbH und Co. KG
Hüttenstraße 36 - 35708 Haiger - Germany
Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186
sales@klingspor.de - www.klingspor.de