


SCM disc, waterproof

NDS 800

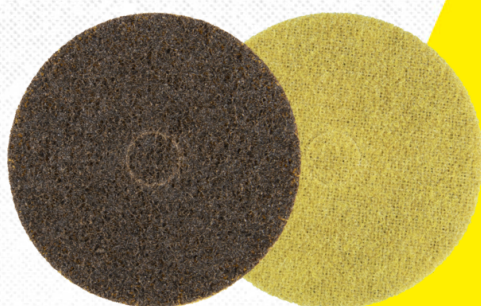

Properties

Bonding agent	Resin
Grain	Aluminium oxide

Product benefit

High edge stability - Aggressive abrasive behaviour - Long service life
 - Can be used for wet and dry grinding - With expressible center hole for easy mounting, secure hold and smooth running on backing plates with centering - Also suited for backing pads without centering and fiber discs backing plates with clamping screw

Materials

Metals	●
Stainless steel	●
Paint/Varnish/Filler	○
Plastic	○
Wood	○

Applications

- Stainless steel processing industry
- Metal construction
- Apparatus and container manufacturing

Available grits:

16	20	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	3000	4000	5000
----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------

Diameter x Bore in mm	Grit	Colour	Grade	Packing unit/pcs.	Cat. number
125 x 22	50	brown	coarse	10	320106
125 x 22	100	maroon	medium	10	320107
125 x 22	180	blue	very fine	10	320108

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de

