


Abrasive paper, self-fastening

PS 33 CK

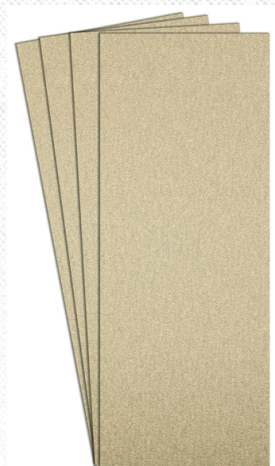

Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Semi-open
Backing	C-paper

Product benefit

Improved abrasive and stock removal performance thanks to special heat-tempered aluminium oxide abrasive grain - Reduced clogging thanks to sanding active fillers in the size coat and the semi-open coating - Outstanding flexibility paired with good stability and tear resistance thanks to latex impregnated paper backing

Materials

Paint/Varnish/Filler	●
Wood	●
Plastic	●

Applications

- Automotive industry
- Wind energy industry
- Aircraft construction
- Wood processing industry
- Craftsman companies

Available grits:

16	20	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	3000	5000	8000
----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------

Width x Length in mm	grain	Hole pattern	type of coat.abras.	Packing unit/pcs.	Cat. number
115 x 230	80	 GL 15	PS 33 CK	100	146968
115 x 230	120	 GL 15	PS 33 CK	100	147182

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de

