
Sprocket Idlers


These sprocket idlers are designed for agricultural detachable link chain. They are installed with standard 1/2″ or 5/8″ bolts, and include accurately contoured hardened teeth to resist wear and damage to the chain. Aetna idlers are compact and easy to install and built for a long maintenance-free service life.

ADVANTAGES

- Case hardened teeth prolong chain and idler life. Accurately contoured teeth from heavy gauge steel
- Over-size, factory packed lubricant chamber assures maximum life and operating efficiency without troublesome relubrication
- Bearing races are hardened to resist wear, outers and inners are accurately formed for smooth running
- Aetna's self-contouring, free running, self-wiping seal provides positive contact under all conditions of misalignment
- Full ball complement for high durability

Detatchable Chain Idlers

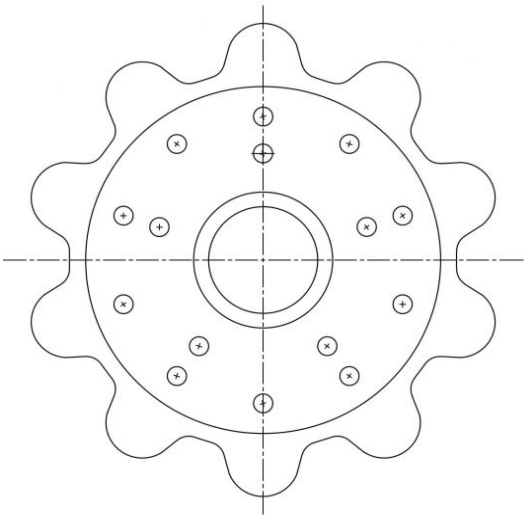

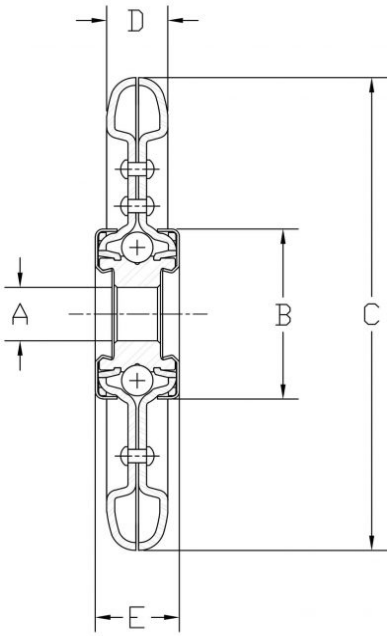

PART NO.	UNIT	CHAIN NO	PITCH	ROLLER DIA	TEETH	A	B	C	D	E	WEIGHT (LBS / kg)
AG2422	Inch	62,62H	1.654	.670 /.686	7	.643/.649	1-13/32	4-29/64	3/4	29/32	1.43
	mm			17.018/17.242		16.332/16.484	35.718	113.109	19.05	23.018	.6486
AG2422-1AF*	Inch	62,62H	1.654	.670 / .686	7	.643/.649	1-13/32	4-29/64	3/4	29/32	1.43
	mm			17.018/17.242		16.332/16.484	35.718	113.109	19.05	23.018	.6486

**Includes Felt & Slinger Seals*

Every effort has been taken to ensure that the data listed in this catalogue is correct.
Finer Power Transmissions P/L will not accept liability for any damage or loss caused as a result of the data in this catalogue.