


Single Row Bearing Idler Pulleys

V-Belt Idlers Cont.

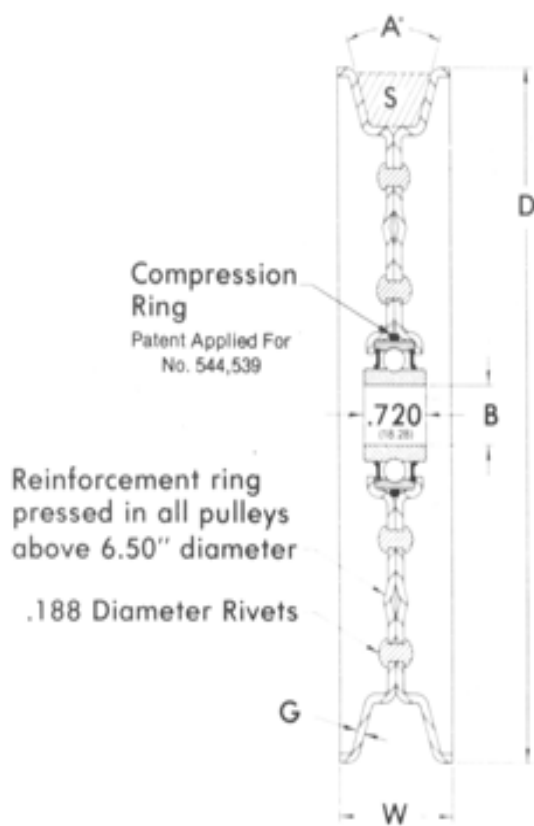

PART NO.	UNIT	INC. ANGLE (A)	BORE (B)	OUTSIDE DIAMETER (D)	PULLEY WIDTH (W)	BELT SIZE	ROWS OF RIVETS	NO. OF RIVETS	GA. MAT. (G)	WEIGHT (LBS / kg)
BVI-80	Inch	32	Fitted with 1/2" Removable Reduction Bush - 3/8" Bush Available	5.00	1.00	B	2	18	14	1.12
	mm			127.00	25.40					0.51
BCVI-81	Inch	32		5.06	1.31	B,C	1	6	14	1.12
	mm			128.59	33.27					0.51
CVI-84	Inch	32		5.25	1.31	C	2	18	14	1.23
	mm			133.35	33.27	C	2	18	14	0.56
BVI-100	Inch	32		6.25	1.00	B	2	18	14	1.62
	mm			158.75	25.40					0.73
CVI-100	Inch	32		6.25	1.31	C	2	18	14	1.68
	mm			158.75	33.72					0.76
BVI-108	Inch	32		6.75	1.00	B	2	18	14	1.82
	mm			171.45	25.40					0.83
BCVI-117	Inch	32		7.31	1.31	B,C	2	18	14	2.14
	mm			185.67	33.27					0.97
CVI-117	Inch	32		7.31	1.31	C	2	18	14	2.11
	mm			185.67	33.27					0.91
5VI-128	Inch	38		8.047	1.06	5V	2	18	14	2.25
	mm			204.39	26.97					1.02
5VI-137	Inch	38		8.56	1.12	5V	2	18	14	2.56
	mm			217.42	28.44					1.16
CVI-144	Inch	32		9.00	1.31	C	2	18	14	3.05
	mm			228.60	33.27					1.38
5VI-152	Inch	38		9.50	1.12	5V	2	18	14	3.26
	mm			241.30	28.44					1.48