


Type G20, (Double Gear) Gear Coupling - AGMA Type

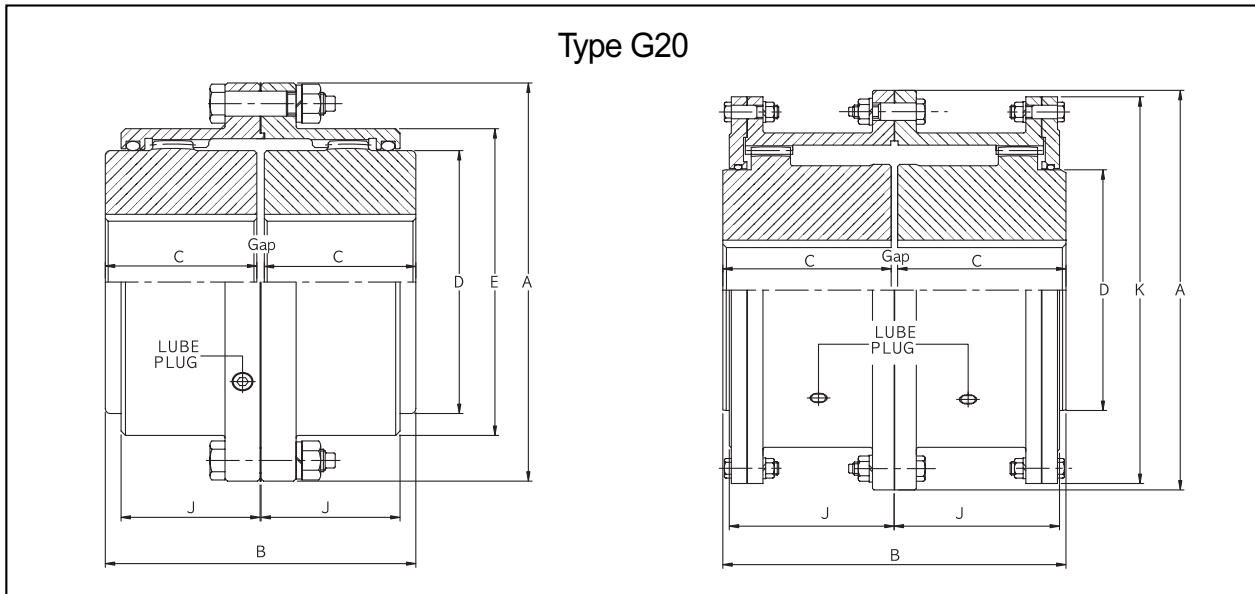

Size	Type G20 Standard Flanged Sleeve							Dimension(inch)						
	HP per 100 rpm	Torque Rating (lb-in)	Allow Speed rpm	Max bore da	Min bore da	Cplg Wt(lb) G20	Lube wf lb	A	B	C	D	E	J	Gap
1010G	16	10,080	8,000	1,875	50	10	.09	4.56	3.50	1.69	2.70	3.30	1.53	.125
1015G	33	20,790	6,500	2,375	75	20	.16	6.00	4.00	1.94	3.40	4.14	1.88	.125
1020G	60	37,800	5,600	2,875	1.00	35	.25	7.00	5.00	2.44	4.14	4.98	2.34	.125
1025G	105	66,150	5,000	3,625	1.25	65	.50	8.38	6.25	3.03	5.14	6.10	2.82	.188
1030G	170	107,100	4,400	4,125	1.50	95	.80	9.44	7.37	3.59	6.00	7.10	3.30	.188
1035G	260	163,800	3,900	4,875	2.00	150	1.20	11.00	8.63	4.19	7.00	8.32	3.84	.250
1040G	430	270,900	3,600	5,750	2.50	215	2.00	12.50	9.75	4.75	8.25	9.66	4.38	.250
1045G	590	371,700	3,200	6,750	3.00	300	2.30	13.62	10.93	5.31	9.25	10.79	4.84	.312
1050G	795	500,900	2,900	7,375	3.50	420	3.90	15.31	12.37	6.03	10.00	12.04	5.54	.312
1055G	1,040	655,200	2,650	8,250	4.00	550	4.90	16.75	13.56	6.62	11.00	13.16	6.22	.312
1060G	1,270	800,100	2,450	9,125	4.50	675	7.00	18.00	15.13	7.41	12.00	14.41	6.66	.312
1070G	1,900	1,197,000	2,150	10,875	5.00	1070	9.60	20.75	17.75	8.69	14.00	16.73	7.70	.375

Size	Type G20 Standard Flanged Sleeve							Dimension(inch)						
	Torque Rating lb-in (millions)		Allow Speed rpm	Max bore da	Min bore da	Cplg Wt(lb) G20	Lube wf lb	A	B	C	D	J	K	Gap
	Series	Series												
1080G	1,506	2,070	1,750	10.50	4.000	1150	21	23.25	20.02	9.82	14.00	9.56	22.50	.375
1090G	1,997	2,791	1,550'	11.25	4.500	2170	27	26.00	22.26	10.88	15.50	10.44	25.25	.500
1100G	2,747	3,919	1,450'	12.75	5.000	2870	33	28.00	24.50	12.00	17.50	11.56	27.50	.500
1110G	3,654	5,393	1,330	14.00	5.500	3700	39	30.50	26.74	13.12	19.50	12.69	29.50	.500
1120G	4,914	6,880	1,200	15.25	6.000	4660	46	33.00	28.26	13.88	21.50	13.44	32.50	.500