



Spherical Roller Bearings

Bore Diameter: 100~110mm

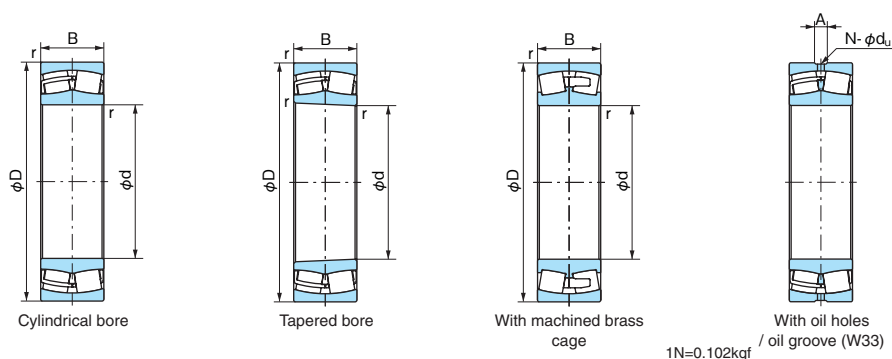

1N=0.102kgf

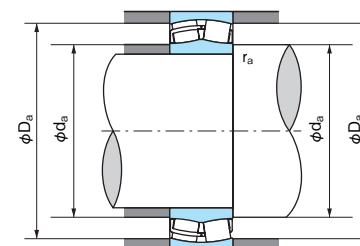

■ Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
X	Y	X	Y
1	Y ₁	0.67	Y ₂

Values of Y₁, Y₂ and e from table.

■ Static equivalent radial load
 $P_0 = F_r + Y_0 F_a$

Values Y₀ from table.

Boundary dimensions (mm)				Bearing No.		Basic dynamic load rating Cr (N)	Basic static load rating Cor (N)	Limiting speed (min ⁻¹)			Dimensions of lubrication holes and grooves			Abutment and fillet dimensions (mm)			Constant e	Axial load factor			Mass (kg) Cylindrical bore (Reference)	Bearing No.	
d	D	B	r (min)	Cylindrical bore	Tapered bore			Grease lubrication	Oil lubrication		Hole diameter d _h	Groove width A	Hole count N	d _a (min)	D _a (max)	r _a (max)		Y ₁	Y ₂	Y ₀		Cylindrical bore	Tapered bore
100	140	30	1.1	23920E	23920EK	197000	233000	3,400	4,500		3	8	4	107.0	133.0	1.0	0.20	3.42	5.08	3.34	1.46	23920E	23920EK
	150	37	1.5	23020E	23020EK	286000	325000	2,700	3,700		4	7	4	117.0	141.0	1.5	0.22	3.01	4.48	2.94	2.33	23020E	23020EK
	150	37	1.5	23020AX	23020AXK	267000	298000	4,200	5,400		4	7	4	117.0	141.0	1.5	0.26	2.64	3.93	2.58	2.40	23020AX	23020AXK
	165	52	2	23120EX1	23120EX1K	450000	500000	2,500	3,300		5	9	4	110.0	155.0	2.0	0.29	2.33	3.47	2.28	4.49	23120EX1	23120EX1K
	165	52	2	23120AX	23120AXK	450000	538000	3,300	4,500		5	9	4	110.0	155.0	2.0	0.34	1.98	2.94	1.93	4.70	23120AX	23120AXK
	180	46	2.1	22220EX	22220EXK	520000	480000	2,800	3,600		5	8	4	112.0	168.0	2.0	0.25	2.74	4.08	2.68	5.10	22220EX	22220EXK
	180	46	2.1	22220AEX	22220AEXK	465000	410000	3,700	4,800		5	8	4	112.0	168.0	2.0	0.29	2.37	3.52	2.31	5.24	22220AEX	22220AEXK
	180	60.3	2.1	23220EX1	23220EX1K	595000	629000	2,800	3,750		5	10	4	112.0	168.0	2.0	0.32	2.09	3.11	2.04	6.76	23220EX1	23220EX1K
	180	60.3	2.1	23220AX	23220AXK	575000	599000	3,100	4,200		5	10	4	112.0	168.0	2.0	0.36	1.88	2.80	1.84	6.88	23220AX	23220AXK
	215	47	3	21320EX1	21320EX1K	580000	524000	2,400	3,300		4	8	6	114.0	201.0	2.5	0.22	3.02	4.49	2.95	8.70	21320EX1	21320EX1K
110	170	45	2	23022E	23022EK	415000	475000	2,700	3,600		5	9	4	120.0	160.0	2.0	0.24	2.84	4.23	2.78	3.84	23022E	23022EK
	170	45	2	23022AX	23022AXK	415000	478000	3,750	4,800		5	9	4	120.0	160.0	2.0	0.28	2.42	3.61	2.37	3.90	23022AX	23022AXK
	180	56	2	23122EX1	23122EX1K	540000	610000	2,700	3,600		5	9	4	120.0	170.0	2.0	0.29	2.36	3.51	2.31	5.70	23122EX1	23122EX1K
	180	56	2	23122AX	23122AXK	535000	605000	3,000	4,050		5	9	4	120.0	170.0	2.0	0.33	2.04	3.03	1.99	5.80	23122AX	23122AXK
	180	69	2	24122EX1	24122EX1K30	633000	743000	2,700	3,600		6	11	4	120.0	170.0	2.0	0.37	1.84	2.74	1.80	6.89	24122EX1	24122EX1K30
	180	69	2	24122AX	24122AXK30	620000	654000	2,700	3,600		6	11	4	120.0	170.0	2.0	0.37	1.80	2.69	1.76	6.85	24122AX	24122AXK30
	200	53	2.1	22222EX	22222EXK	680000	640000	2,600	3,200		5	10	6	122.0	188.0	2.0	0.26	2.64	3.93	2.58	7.36	22222EX	22222EXK
	200	53	2.1	22222AEX	22222AEXK	605000	550000	3,300	4,350		6	10	6	122.0	188.0	2.0	0.29	2.31	3.44	2.26	7.53	22222AEX	22222AEXK
	200	69.8	2.1	23222EX1	23222EX1K	750000	793000	2,550	3,300		6	11	6	122.0	188.0	2.0	0.34	1.99	2.96	1.94	9.60	23222EX1	23222EX1K
	200	69.8	2.1	23222AX	23222AXK	740000	801000	2,850	3,750		6	11	6	122.0	188.0	2.0	0.38	1.78	2.65	1.74	10.0	23222AX	23222AXK
	240	50	3	21322EX1	21322EX1K	675000	635000	2,100	2,850		4	8	6	124.0	226.0	2.5	0.21	3.19	4.75	3.12	11.6	21322EX1	21322EX1K
	240	50	3	21322AX	21322AXK	655000	601000	3,000	3,750		4	8	6	124.0	226.0	2.5	0.24	2.78	4.14	2.72	12.2	21322AX	21322AXK
	240	80	3	22322EX	22322EXK	1150000	1040000	1,950	2,700		6	12	6	124.0	226.0	2.5	0.33	2.03	3.02	1.98	18.1	22322EX	22322EXK
	240	80	3	22322AEX	22322AEXK	1030000	940000	3,000	3,750		6	12	6	124.0	226.0	2.5	0.38	1.77	2.63	1.73	18.2	22322AEX	22322AEXK

Note: Suffix K or K30 means tapered bore (1/12 or 1/30).