



Spherical Roller Thrust Bearings



Bore Diameter: 60~130mm

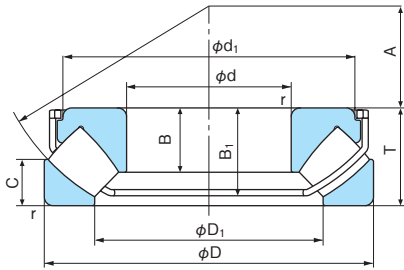

Type EX

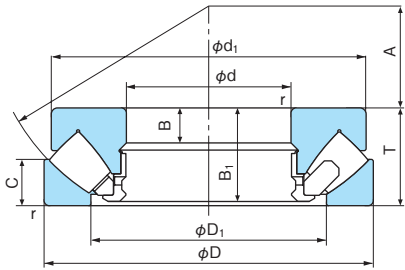

Type E

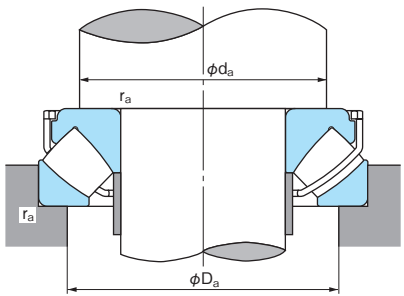


Dynamic equivalent axial load
 $P_a = F_a + 1.2F_r$
Static equivalent axial load
 $P_o = F_a + 2.7F_r$
where, F_a : Axial load
 F_r : Radial load
However $\frac{F_r}{F_a} \leq 0.55$
However $F_r/F_a \leq 0.55$ must be satisfied

Boundary dimensions (mm)				Bearing No.	Basic dynamic load rating Ca (N)	Basic static load rating Coa (N)	Limiting speed (min ⁻¹)			Reference Dimensions (mm)						Abutment and fillet dimensions (mm)			Spacer dimensions (mm)		Mass (kg) (Reference)	Bearing No.
d	D	T	r (min)				Grease lubrication	Oil lubrication		d ₁	D ₁	B	B ₁	C	A	da (min)	Da (max)	ra (max)	db ₁ (max)	db ₂ (max)		
60	130	42	1.5	29412E	299000	890000	—	2800		123	89	15	39.5	20	38	91	108	1.5	—	—	2.75	29412E
	130	42	1.5	29412EX	350000	915000	1800	2800		113	87	27	37.1	20	38	91	108	1.5	66.0	66.0	2.50	29412EX
65	140	45	2	29413E	345000	1040000	—	2700		133	96	16	42.5	21	42	99	115	2.0	—	—	3.41	29413E
	140	45	2	29413EX	410000	1110000	1700	2700		123	93.5	29.5	40	21	42	99	115	2.0	72.0	72.0	3.20	29413EX
70	150	48	2	29414E	375000	1110000	—	2400		142	103	17	45.5	23	44	106	125	2.0	—	—	4.16	29414E
	150	48	2	29414EX	490000	1350000	1600	2400		128.3	98.4	32	42.7	23	44	106	125	2.0	75.5	77.5	3.82	29414EX
75	160	51	2	29415E	445000	1380000	—	2300		152	109	18	48	24	47	113	132	2.0	—	—	4.98	29415E
	160	51	2	29415EX	525000	1470000	1600	2300		140	105.6	34.5	45.6	24	47	113	132	2.0	82.5	82.5	4.70	29415EX
80	170	54	2.1	29416E	480000	1490000	—	2100		162	117	19	51	26	50	120	140	2.0	—	—	5.95	29416E
	170	54	2.1	29416EX	580000	1630000	1500	2100		149	113	36	48.2	26	50	120	140	2.0	88.0	88.0	5.60	29416EX
85	150	39	1.5	29317E	293000	990000	—	2700		143.5	114	13	37	19	50	115	135	1.5	—	—	2.87	29317E
	150	39	1.5	29317EX	365000	1060000	1600	2700		134	110.5	25	35	19	50	115	135	1.5	90.0	90.0	2.67	29317EX
	180	58	2.1	29417E	540000	1720000	—	2000		170	125	21	55	28	54	130	150	2.0	—	—	7.19	29417E
	180	58	2.1	29417EX	640000	1810000	1300	2000		158.2	120.5	37	50.6	28	54	130	150	2.0	94.0	94.0	6.69	29417EX
90	155	39	1.5	29318E	300000	1040000	—	2700		148.5	117	13	37	19	52	120	140	1.5	—	—	3.06	29318E
	155	39	1.5	29318EX	355000	1070000	1600	2700		135.2	116	23.8	35.1	19	52	120	140	1.5	95.0	95.0	2.75	29318EX
	190	60	2.1	29418E	620000	2020000	—	1900		180	132	22	57	29	56	135	157	2.0	—	—	8.28	29418E
	190	60	2.1	29418EX	710000	2080000	1300	1900		162	127	40.5	53	29	56	135	157	2.0	99.0	99.0	7.83	29418EX
100	170	42	1.5	29320E	355000	1260000	—	2500		163	129	14	40	20.8	58	130	150	1.5	—	—	3.91	29320E
	170	42	1.5	29320EX	435000	1400000	1500	2500		146.9	126	27	38.2	20.8	58	130	150	1.5	105.0	107.0	3.61	29320EX
	210	67	3	29420E	690000	2230000	—	1700		200	146	24	64	32	62	150	175	2.5	—	—	11.2	29420E
	210	67	3	29420EX	870000	2530000	1100	1700		181	139	44.5	59.6	32	62	150	175	2.5	108.0	110.0	10.6	29420EX
110	190	48	2	29322E	470000	1680000	—	2100		182	143	16	45.5	23	64	145	165	2.0	—	—	5.67	29322E
	190	48	2	29322EX	550000	1730000	1300	2100		165.1	140.6	30.9	44	23	64	145	165	2.0	116.0	117.0	5.22	29322EX
	230	73	3	29422E	845000	2820000	—	1500		220	162	26	69	35	69	165	190	2.5	—	—	14.7	29422E
	230	73	3	29422EX	1060000	3150000	950	1500		199.6	153.4	48	64.4	35	69	165	190	2.5	119.5	120.0	14.0	29422EX
120	210	54	2.1	29324E	565000	2030000	—	1900		200	159	18	51	26	70	160	180	2.0	—	—	7.90	29324E
	210	54	2.1	29324EX	670000	2160000	1100	1900		184.5	155	34.5	48.7	26	70	160	180	2.0	127.0	128.0	7.30	29324EX
	250	78	4	29424E	1030000	3450000	—	1400		236	174	29	74	37	74	180	205	3.0	—	—	18.5	29424E
	250	78	4	29424EX	1210000	3750000	900	1400		218	166.5	54	70.9	37	74	180	205	3.0	131.0	132.0	17.6	29424EX
130	225	58	2.1	29326E	665000	2420000	—	1800		215	171	19	55	28	76	170	195	2.0	—	—	9.45	29326E
	225	58	2.1	29326EX	770000	2440000	1000	1800		197.4	165.8	36.8	52.7	28	76	170	195	2.0	136.0	138.0	8.82	29326EX
	270	85	4	29426E	1140000	3850000	—	1200		255	189	31	81	41	81	195	225	3.0	—	—	23.5	29426E
	270	85	4	29426EX	1400000	4300000	850	1200		236.4	181	56	75	41	81	195	225	3.0	141.5	143.0	22.3	29426EX


Note: For heavy load application, da should be large enough to support the shaft washer rib.

Spherical Roller Thrust Bearings



Bore Diameter: 140~240mm

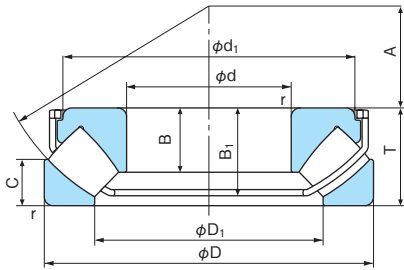

Type EX

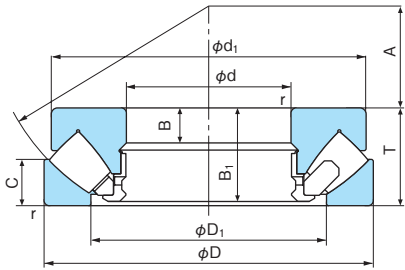

Type E

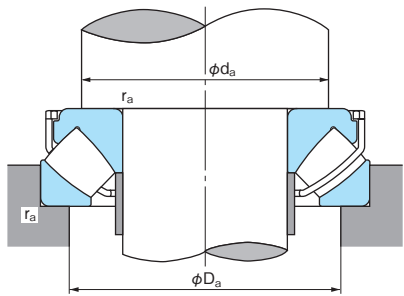

Dynamic equivalent axial load
 $P_a = F_a + 1.2 F_r$
Static equivalent axial load
 $P_o = F_a + 2.7 F_r$
where, F_a : Axial load
 F_r : Radial load
However $\frac{F_r}{F_a} \leq 0.55$
However $F_r/F_a \leq 0.55$ must be satisfied

1N=0.102kgf

Boundary dimensions (mm)				Bearing No.	Basic dynamic load rating Ca (N)	Basic static load rating Coa (N)	Limiting speed (min ⁻¹)			Reference Dimensions (mm)						Abutment and fillet dimensions (mm)			Spacer dimensions (mm)		Mass (kg) (Reference)	Bearing No.
d	D	T	r (min)				Grease lubrication	Oil lubrication		d1	D1	B	B1	C	A	da (min)	Da (max)	ra (max)	db1 (max)	db2 (max)		
140	240	60	2.1	29328E	700000	2560000	—	1600		230	183	20	57	29	82	185	205	2.0	—	—	11.2	29328E
	240	60	2.1	29328EX	860000	2840000	950	1600		218.4	179	38.5	54.8	29	82	185	205	2.0	147.5	149.0	10.5	29328EX
	280	85	4	29428E	1200000	4050000	—	1200		268	199	31	81	41	86	205	235	3.0	—	—	24.6	29428E
	280	85	4	29428EX	1410000	4350000	850	1200		246	196	53.6	74.4	41	86	205	235	3.0	153.0	160.0	22.8	29428EX
150	215	39	1.5	29230E	335000	1390000	—	2100		208	178	14	37	19	82	179	196	1.5	—	—	4.60	29230E
	250	60	2.1	29330E	735000	2840000	—	1600		240	194	20	57	29	87	195	215	2.0	—	—	11.7	29330E
	300	90	4	29430E	1330000	4600000	—	1100		285	214	32	86	44	92	220	250	3.0	—	—	29.6	29430E
	300	90	4	29430EX	1630000	5150000	800	1100		265.4	207.5	58.5	80.8	44	92	220	250	3.0	163.0	169.0	27.8	29430EX
160	225	39	1.5	29232E	345000	1470000	—	2100		219	188	14	37	19	85	189	206	1.5	—	—	4.70	29232E
	270	67	3	29332E	880000	3400000	—	1400		260	208	23	64	32	92	210	235	2.5	—	—	15.5	29332E
	270	67	3	29332EX	1040000	3500000	850	1400		243.4	199.8	44	61.4	32	92	210	235	2.5	166.0	174.0	14.5	29332EX
	320	95	5	29432E	1510000	5350000	—	1000		306	229	34	91	45	99	230	265	4.0	—	—	35.9	29432E
	320	95	5	29432EX	1820000	5750000	750	1000		283.8	222	62.5	85.7	45	99	230	265	4.0	174.5	181.0	33.4	29432EX
170	240	42	1.5	29234E	390000	1700000	—	1900		233	198	15	40	20	92	201	218	1.5	—	—	6.00	29234E
	280	67	3	29334E	900000	3550000	—	1400		270	216	23	64	32	96	220	245	2.5	—	—	16.3	29334E
	340	103	5	29434E	1670000	5900000	—	950		324	243	37	99	50	104	245	285	4.0	—	—	44.0	29434E
180	250	42	1.5	29236E	420000	1900000	—	1900		243	208	15	40	21	95	211	228	1.5	—	—	6.30	29236E
	300	73	3	29336E	1020000	3950000	—	1300		290	232	25	69	35	103	235	260	2.5	—	—	20.7	29336E
	360	109	5	29436E	1950000	7000000	—	860		342	255	39	105	52	110	260	300	4.0	—	—	52.2	29436E
190	270	48	2	29238E	540000	2300000	—	1800		262	223	15	45	24	104	225	245	2.0	—	—	8.50	29238E
	320	78	4	29338E	1170000	4550000	—	1100		308	246	27	74	38	110	250	275	3.0	—	—	25.5	29338E
	380	115	5	29438E	2120000	7750000	—	800		360	271	41	111	55	117	275	320	4.0	—	—	61.4	29438E
200	280	48	2	29240E	550000	2410000	—	1800		271	236	15	45	24	108	235	255	2.0	—	—	9.08	29240E
	340	85	4	29340E	1350000	5250000	—	1000		325	261	29	81	41	116	265	295	3.0	—	—	32.0	29340E
	400	122	5	29440E	2350000	8450000	—	740		380	286	43	117	59	122	290	335	4.0	—	—	73.0	29440E
220	300	48	2	29244E	595000	2750000	—	1600		292	254	15	45	24	117	260	275	2.0	—	—	9.84	29244E
	360	85	4	29344E	1410000	5750000	—	1000		345	280	29	81	41	125	285	315	3.0	—	—	34.5	29344E
	420	122	6	29444E	2410000	8950000	—	720		400	308	43	117	58	132	310	355	5.0	—	—	74.2	29444E
240	340	60	2.1	29248E	890000	4000000	—	1300		330	283	19	57	30	130	285	305	2.0	—	—	17.1	29248E
	380	85	4	29348E	1410000	5850000	—	980		365	300	29	81	41	135	300	330	3.0	—	—	36.3	29348E
	440	122	6	29448E	2480000	9450000	—	720		420	326	43	117	59	142	330	375	5.0	—	—	83.0	29448E

Note: For heavy load application, da should be large enough to support the shaft washer rib.