


Angular Contact Ball Bearings Single Mounting / Duplex Mounting

Bore Diameter: 10～17mm

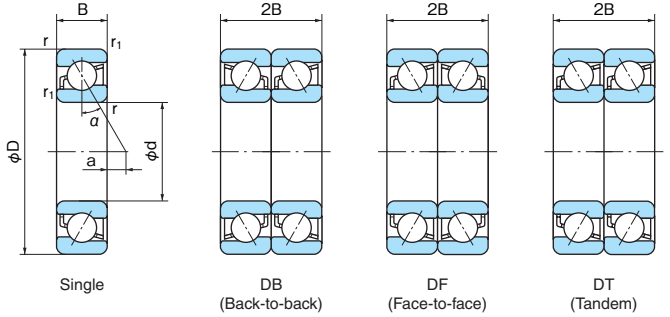



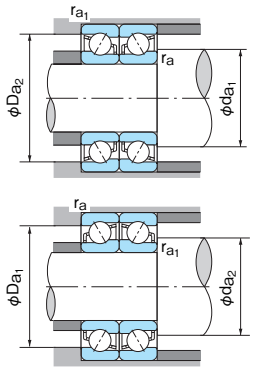

■Dynamic equivalent radial load

Pr=XFr+YFa

Contact angle	$\frac{iFa}{Cor}$	e	Single or DT $\frac{Fa}{Fr}$ > e		DB or DF $\frac{Fa}{Fr}$ ≦ e		DB or DF $\frac{Fa}{Fr}$ > e	
			X	Y	X	Y	X	Y
15°	0.015	0.38		1.47		1.65		2.39
	0.029	0.40	0.44	1.40	1	1.57	0.72	2.28
	0.058	0.43		1.30		1.46		2.11
	0.087	0.46		1.23		1.38		2.00
	0.12	0.47	0.44	1.19	1	1.34	0.72	1.93
	0.17	0.50		1.12		1.26		1.82
	0.29	0.55		1.02		1.14		1.66
	0.44	0.56	0.44	1.00	1	1.12	0.72	1.63
	0.58	0.56		1.00		1.12		1.63
30°	—	0.8	0.39	0.76	1	0.78	0.63	1.24
40°	—	1.14	0.35	0.57	1	0.55	0.57	0.93

■i = 2 for DB or DF mounting
i = 1 for Single or DT mounting

■Single or DT mounting When Fa/Fr≦e, use Pr = Fr

■Static equivalent radial load

Por=XoFr+YoFa

Contact angle	Single or DT		DB or DF	
	X_0	Y_0	X_0	Y_0
15°	0.5	0.46	1	0.92
30°	0.5	0.33	1	0.66
40°	0.5	0.26	1	0.52

Single or DT mounting When Por＜Fr, use Pr = Fr


1N=0.102kgf


Boundary dimensions (mm)					Load center (mm)	Bearing No.				Basic dynamic load rating Cr (N)		Basic static load rating Cor (N)		Limiting speed (min-1)				Abutment and fillet dimensions (mm)						Mass (kg)	Bearing No.
														Grease lubrication		Oil lubrication									
d	D	B	r (min)	r1 (min)	a	Single	Duplex			Single	Duplex	Single	Duplex	Single	Duplex	Single	Duplex	da1 (min)	da2 (min)	Da1 (max)	Da2 (max)	ra (max)	ra1 (max)	Single	
10	26	8	0.3	0.15	1.2	7000	7000DB	7000DF	7000DT	5000	8150	2340	4650	23000	19000	31000	26000	12	12	24	25	0.3	0.15	0.022	7000
	26	8	0.3	0.15	–1.9	7000C	7000CDB	7000CDF	7000CDT	5350	8700	2500	5000	44000	35000	61000	49000	12	12	24	25	0.3	0.15	0.022	7000C
	30	9	0.6	0.3	1.3	7200	7200DB	7200DF	7200DT	5400	8800	2710	5400	22000	18000	30000	24000	15	12	25	27.4	0.6	0.3	0.034	7200
	30	9	0.6	0.3	3.9	7200B	7200BDB	7200BDF	7200BDT	5150	8350	2570	5150	19000	16000	28000	22000	15	12	25	27.4	0.6	0.3	0.034	7200B
	30	9	0.6	0.3	–2.2	7200C	7200CDB	7200CDF	7200CDT	6950	11300	3300	6650	40000	32000	55000	44000	15	15	25	27.4	0.6	0.3	0.034	7200C
	35	11	0.6	0.3	1.0	7300	7300DB	7300DF	7300DT	9300	15100	4300	8600	20000	16000	26000	21000	15	12	30	32.4	0.6	0.3	0.055	7300
	35	11	0.6	0.3	3.9	7300B	7300BDB	7300BDF	7300BDT	8950	14500	4150	8250	18000	14000	24000	19000	15	12	30	32.4	0.6	0.3	0.055	7300B
	35	11	0.6	0.3	–2.8	7300C	7300CDB	7300CDF	7300CDT	9850	16000	4600	9250	36000	29000	49000	39000	15	15	30	32.4	0.6	0.3	0.055	7300C
12	28	8	0.3	0.15	1.7	7001	7001DB	7001DF	7001DT	5050	8800	2710	5700	22000	18000	29000	23000	14	14	26	27	0.3	0.15	0.024	7001
	28	8	0.3	0.15	–1.7	7001C	7001CDB	7001CDF	7001CDT	5800	9450	2910	5800	40000	32000	55000	44000	14	14	26	27	0.3	0.15	0.024	7001C
	32	10	0.6	0.3	1.4	7201	7201DB	7201DF	7201DT	7600	12400	3960	7950	20000	16000	27000	22000	17	14	27	29.4	0.6	0.3	0.040	7201
	32	10	0.6	0.3	4.2	7201B	7201BDB	7201BDF	7201BDT	7200	11700	3800	7550	17000	15000	24000	20000	17	14	27	29.4	0.6	0.3	0.040	7201B
	32	10	0.6	0.3	–2.5	7201C	7201CDB	7201CDF	7201CDT	7950	13000	3900	7750	36000	29000	50000	40000	17	17	27	29.4	0.6	0.3	0.040	7201C
	37	12	1	0.6	1.1	7301	7301DB	7301DF	7301DT	11200	18200	5250	10500	18000	15000	24000	20000	18	15	31	33.4	1	0.6	0.063	7301
	37	12	1	0.6	4.3	7301B	7301BDB	7301BDF	7301BDT	10800	17500	5050	10100	16000	13000	22000	18000	18	15	31	33.4	1	0.6	0.063	7301B
	37	12	1	0.6	–3.1	7301C	7301CDB	7301CDF	7301CDT	10800	17500	4900	9800	33000	26000	45000	36000	18	18	31	33.4	1	0.6	0.063	7301C
15	32	9	0.3	0.15	2.3	7002	7002DB	7002DF	7002DT	6150	9950	3400	6850	18000	15000	24000	20000	17	17	30	31	0.3	0.15	0.035	7002
	32	9	0.3	0.15	–1.8	7002C	7002CDB	7002CDF	7002CDT	6650	10800	3700	7450	34000	27000	47000	38000	17	17	30	31	0.3	0.15	0.035	7002C
	35	11	0.6	0.3	1.7	7202	7202DB	7202DF	7202DT	9050	14700	4700	9400	17000	14000	23000	19000	20	17	30	32.4	0.6	0.3	0.048	7202
	35	11	0.6	0.3	5.0	7202B	7202BDB	7202BDF	7202BDT	8600	14000	4500	8950	16000	12000	21000	17000	20	17	30	32.4	0.6	0.3	0.048	7202B
	35	11	0.6	0.3	–2.6	7202C	7202CDB	7202CDF	7202CDT	8700	14200	4550	9150	32000	26000	44000	35000	20	20	30	32.4	0.6	0.3	0.048	7202C
	42	13	1	0.6	1.7	7302	7302DB	7302DF	7302DT	13600	22000	7100	14200	16000	13000	21000	17000	21	18	36	38.4	1	0.6	0.085	7302
	42	13	1	0.6	5.5	7302B	7302BDB	7302BDF	7302BDT	12800	21000	6750	13500	14000	11000	19000	16000	21	18	36	38.4	1	0.6	0.085	7302B
	42	13	1	0.6	–3.1	7302C	7302CDB	7302CDF	7302CDT	13300	21700	6850	13700	28000	22000	39000	31000	21	21	36	38.4	1	0.6	0.085	7302C
17	35	10	0.3	0.15	2.5	7003	7003DB	7003DF	7003DT	6400	10400	3800	7650	17000	13000	22000	18000	19	19	33	34	0.3	0.15	0.045	7003
	35	10	0.3	0.15	–2.0	7003C	7003CDB	7003CDF	7003CDT	7000	11400	4150	8300	31000	25000	42000	34000	19	19	33	34	0.3	0.15	0.045	7003C
	40	12	0.6	0.3	2.2	7203	7203DB	7203DF	7203DT	11900	19400	6600	13200	16000	13000	21000	17000	22	19	35	37.4	0.6	0.3	0.070	7203
	40	12	0.6	0.3	6.0	7203B	7203BDB	7203BDF	7203BDT	11300	18400	6300	12600	14000	11000	19000	15000	22	19	35	37.4	0.6	0.3	0.070	7203B
	40	12	0.6	0.3	–2.7	7203C	7203CDB	7203CDF	7203CDT	10900	17800	5900	11800	28000	22000	39000	31000	22	22	35	37.4	0.6	0.3	0.070	7203C
	47	14	1	0.6	2.2	7303	7303DB	7303DF	7303DT	15900	25900	8650	17300	14000	11000	19000	15000	23	21	41	43.4	1	0.6	0.120	7303
	47	14	1	0.6	6.4	7303B	7303BDB	7303BDF	7303BDT	15200	24700	8250	16500	13000	10000	17000	14000	23	21	41	43.4	1	0.6	0.120	7303B
	47	14	1	0.6	–3.2	7303C	7303CDB	7303CDF	7303CDT	15900	25800	8350	16700	25000	20000	34000	27000	23	23	41	43.4	1	0.6	0.120	7303C


Remarks: 1. “a” means the distance between back face and load center.
2. See page 122 regarding limiting speeds.

Angular Contact Ball Bearings Single Mounting / Duplex Mounting

Bore Diameter: 20～35mm

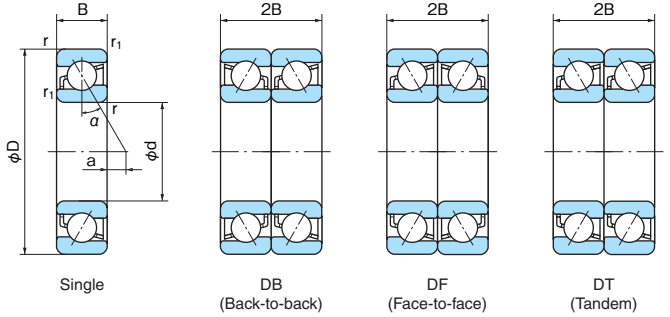



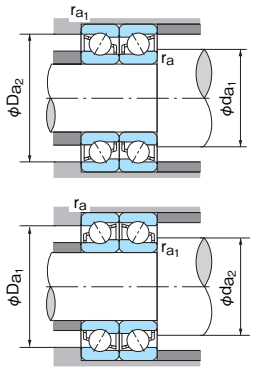

■Dynamic equivalent radial load

Pr=XFr+YFa

Contact angle	iFa/Cor	e	Single or DT: Fa/Fr > e X	Single or DT: Fa/Fr > e Y	DB or DF: Fa/Fr ≦ e X	DB or DF: Fa/Fr ≦ e Y	DB or DF: Fa/Fr > e X	DB or DF: Fa/Fr > e Y
15°	0.015	0.38		1.47		1.65		2.39
	0.029	0.40	0.44	1.40	1	1.57	0.72	2.28
	0.058	0.43		1.30		1.46		2.11
	0.087	0.46		1.23		1.38		2.00
	0.12	0.47	0.44	1.19	1	1.34	0.72	1.93
	0.17	0.50		1.12		1.26		1.82
	0.29	0.55		1.02		1.14		1.66
	0.44	0.56	0.44	1.00	1	1.12	0.72	1.63
	0.58	0.56		1.00		1.12		1.63
30°	—	0.8	0.39	0.76	1	0.78	0.63	1.24
40°	—	1.14	0.35	0.57	1	0.55	0.57	0.93

■i = 2 for DB or DF mounting
i = 1 for Single or DT mounting

■Single or DT mounting When Fa/Fr≦e, use Pr = Fr

■Static equivalent radial load

Por=XoFr+YoFa

Contact angle	Single or DT: X0	Single or DT: Y0	DB or DF: X0	DB or DF: Y0
15°	0.5	0.46	1	0.92
30°	0.5	0.33	1	0.66
40°	0.5	0.26	1	0.52

Single or DT mounting When Por＜Fr, use Pr = Fr


1N=0.102kgf


Boundary dimensions (mm) d	D	B	r (min)	r1 (min)	Load center (mm) a	Bearing No. Single	Duplex			Basic dynamic load rating Cr (N) Single	Duplex	Basic static load rating Cor (N) Single	Duplex	Limiting speed (min-1) Grease lubrication Single	Grease lubrication Duplex	Oil lubrication Single	Oil lubrication Duplex	Abutment and fillet dimensions (mm) da1 (min)	da2 (min)	Da1 (max)	Da2 (max)	ra (max)	ra1 (max)	Mass (kg) Single	Bearing No.
20	42	12	0.6	0.3	2.9	7004	7004DB	7004DF	7004DT	10300	16700	6050	12100	15000	12000	20000	16000	24	24	38	40	0.6	0.3	0.079	7004
	42	12	0.6	0.3	–2.4	7004C	7004CDB	7004CDF	7004CDT	11200	18200	6600	13200	26000	21000	35000	28000	24	24	38	40	0.6	0.3	0.079	7004C
	47	14	1	0.6	2.7	7204	7204DB	7204DF	7204DT	14500	23500	8300	16600	13000	10000	18000	14000	26	23	41	43.4	1	0.6	0.110	7204
	47	14	1	0.6	7.1	7204B	7204BDB	7204BDF	7204BDT	13700	22300	7850	15700	11000	9500	16000	13000	26	23	41	43.4	1	0.6	0.110	7204B
	47	14	1	0.6	–3.1	7204C	7204CDB	7204CDF	7204CDT	14700	23800	8150	16300	24000	19000	33000	26000	26	26	41	43.4	1	0.6	0.110	7204C
	52	15	1.1	0.6	2.9	7304	7304DB	7304DF	7304DT	18700	30500	10400	20800	13000	10000	17000	13000	27	25	45	47	1	0.6	0.150	7304
	52	15	1.1	0.6	7.6	7304B	7304BDB	7304BDF	7304BDT	17800	28900	9900	19800	10000	9000	15000	12000	27	25	45	47	1	0.6	0.150	7304B
	52	15	1.1	0.6	–3.2	7304C	7304CDB	7304CDF	7304CDT	18600	30000	10000	20000	22000	18000	31000	25000	27	27	45	47	1	0.6	0.150	7304C
25	47	12	0.6	0.3	4.4	7005	7005DB	7005DF	7005DT	11300	18400	7400	14800	13000	10000	17000	13000	29	29	43	45	0.6	0.3	0.091	7005
	47	12	0.6	0.3	–1.8	7005C	7005CDB	7005CDF	7005CDT	12900	21000	8650	17300	22000	18000	31000	25000	29	29	43	45	0.6	0.3	0.091	7005C
	52	15	1	0.6	3.6	7205	7205DB	7205DF	7205DT	16200	26300	10200	20500	12000	9500	15000	12000	31	28	46	48.4	1	0.6	0.135	7205
	52	15	1	0.6	8.9	7205B	7205BDB	7205BDF	7205BDT	15300	24800	9700	19400	9500	8000	14000	11000	31	28	46	48.4	1	0.6	0.135	7205B
	52	15	1	0.6	–3.1	7205C	7205CDB	7205CDF	7205CDT	16700	27100	10300	20700	21000	17000	29000	23000	31	31	46	48.4	1	0.6	0.135	7205C
	62	17	1.1	0.6	4.1	7305	7305DB	7305DF	7305DT	26400	43000	15800	31500	10000	8500	14000	11000	32	30	55	57	1	0.6	0.245	7305
	62	17	1.1	0.6	9.8	7305B	7305BDB	7305BDF	7305BDT	25100	40500	15100	30000	8500	7300	12000	10000	32	30	55	57	1	0.6	0.245	7305B
	62	17	1.1	0.6	–3.4	7305C	7305CDB	7305CDF	7305CDT	26600	43000	15500	31000	18000	14000	25000	20000	32	32	55	57	1	0.6	0.245	7305C
30	55	13	1	0.6	5.8	7006	7006DB	7006DF	7006DT	14500	23600	10100	20300	12000	8500	14000	11000	35	35	50	52	1	0.6	0.135	7006
	55	13	1	0.6	–1.6	7006C	7006CDB	7006CDF	7006CDT	16000	25900	11100	24000	19000	15000	26000	21000	35	35	50	52	1	0.6	0.135	7006C
	62	16	1	0.6	5.3	7206	7206DB	7206DF	7206DT	22500	36500	14800	29600	10000	8000	13000	10000	36	33	56	58.4	1	0.6	0.210	7206
	62	16	1	0.6	11.3	7206B	7206BDB	7206BDF	7206BDT	21200	34500	13900	27900	8500	7000	12000	9500	36	33	56	58.4	1	0.6	0.210	7206B
	62	16	1	0.6	–2.7	7206C	7206CDB	7206CDF	7206CDT	23200	37500	14900	29700	18000	14000	24000	19000	36	36	56	58.4	1	0.6	0.210	7206C
	72	19	1.1	0.6	5.2	7306	7306DB	7306DF	7306DT	33500	54500	22400	44500	9000	7000	12000	9500	37	35	65	67	1	0.6	0.360	7306
	72	19	1.1	0.6	11.9	7306B	7306BDB	7306BDF	7306BDT	32000	52000	21000	42000	7500	6100	10000	8500	37	35	65	67	1	0.6	0.360	7306B
	72	19	1.1	0.6	–3.6	7306C	7306CDB	7306CDF	7306CDT	32500	52500	20400	40500	16000	13000	22000	18000	37	37	65	67	1	0.6	0.360	7306C
35	62	14	1	0.6	7	7007	7007DB	7007DF	7007DT	17500	28500	12600	25200	9500	7500	13000	10000	40	40	57	59	1	0.6	0.170	7007
	62	14	1	0.6	–1.4	7007C	7007CDB	7007CDF	7007CDT	19300	31000	13700	27500	16000	13000	23000	18000	40	40	57	59	1	0.6	0.170	7007C
	72	17	1.1	0.6	6.9	7207	7207DB	7207DF	7207DT	29700	48000	20000	40000	8500	7000	11000	9500	42	40	65	67	1	0.6	0.295	7207
	72	17	1.1	0.6	14.1	7207B	7207BDB	7207BDF	7207BDT	28000	45500	19000	38000	7500	6000	10000	8000	42	40	65	67	1	0.6	0.295	7207B
	72	17	1.1	0.6	–2.8	7207C	7207CDB	7207CDF	7207CDT	30500	49500	20100	40000	15000	12000	21000	17000	42	42	65	67	1	0.6	0.295	7207C
	80	21	1.5	1	6.1	7307	7307DB	7307DF	7307DT	40000	65000	26300	52500	8000	6300	10000	8500	44	40	71	74.6	1.5	1	0.475	7307
	80	21	1.5	1	13.7	7307B	7307BDB	7307BDF	7307BDT	37500	61500	24900	49500	7000	5500	9500	7500	44	40	71	74.6	1.5	1	0.475	7307B
	80	21	1.5	1	–3.9	7307C	7307CDB	7307CDF	7307CDT	40500	66000	26000	52000	14000	11000	19000	15000	44	44	71	74.6	1.5	1	0.475	7307C


Remarks: 1. “a” means the distance between back face and load center.
2. See page 122 regarding limiting speeds.

Angular Contact Ball Bearings Single Mounting / Duplex Mounting

Bore Diameter: 40～55mm

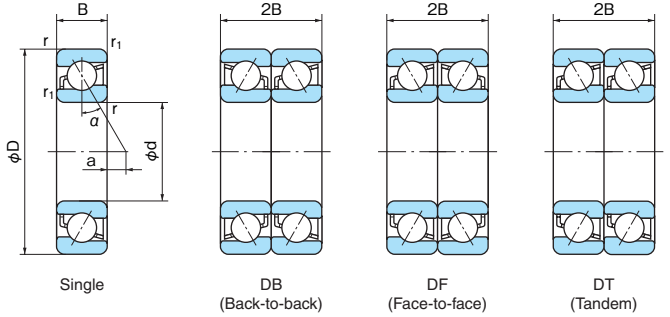



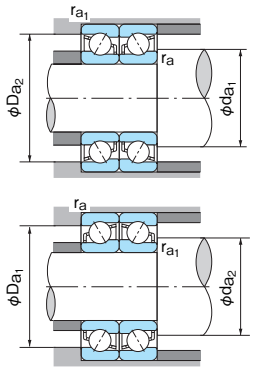

Dynamic equivalent radial load

Pr=XFr+YFa

Contact angle	iFa/Cor	e	Single or DT: Fa/Fr > e X	Single or DT: Fa/Fr > e Y	DB or DF: Fa/Fr ≦ e X	DB or DF: Fa/Fr ≦ e Y	DB or DF: Fa/Fr > e X	DB or DF: Fa/Fr > e Y
15°	0.015	0.38		1.47		1.65		2.39
	0.029	0.40	0.44	1.40	1	1.57	0.72	2.28
	0.058	0.43		1.30		1.46		2.11
	0.087	0.46		1.23		1.38		2.00
	0.12	0.47	0.44	1.19	1	1.34	0.72	1.93
	0.17	0.50		1.12		1.26		1.82
	0.29	0.55		1.02		1.14		1.66
	0.44	0.56	0.44	1.00	1	1.12	0.72	1.63
	0.58	0.56		1.00		1.12		1.63
30°	—	0.8	0.39	0.76	1	0.78	0.63	1.24
40°	—	1.14	0.35	0.57	1	0.55	0.57	0.93

i = 2 for DB or DF mounting
i = 1 for Single or DT mounting

Single or DT mounting When Fa/Fr≦e, use Pr = Fr

Static equivalent radial load

Por=XoFr+YoFa

Contact angle	Single or DT: X0	Single or DT: Y0	DB or DF: X0	DB or DF: Y0
15°	0.5	0.46	1	0.92
30°	0.5	0.33	1	0.66
40°	0.5	0.26	1	0.52

Single or DT mounting When Por＜Fr, use Pr = Fr


1N=0.102kgf


Boundary dimensions (mm) d	D	B	r (min)	r1 (min)	Load center (mm) a	Bearing No. Single	Duplex			Basic dynamic load rating Cr (N) Single	Duplex	Basic static load rating Cor (N) Single	Duplex	Limiting speed (min-1) Grease lubrication Single	Grease lubrication Duplex	Oil lubrication Single	Oil lubrication Duplex	Abutment and fillet dimensions (mm) da1 (min)	da2 (min)	Da1 (max)	Da2 (max)	ra (max)	ra1 (max)	Mass (kg) Single	Bearing No.
40	68	15	1	0.6	8.2	7008	7008DB	7008DF	7008DT	18800	30500	14500	29000	8500	6600	11000	9000	45	45	63	65	1	0.6	0.210	7008
	68	15	1	0.6	–1.3	7008C	7008CDB	7008CDF	7008CDT	20700	33500	16000	32000	15000	12000	20000	16000	45	45	63	65	1	0.6	0.210	7008C
	80	18	1.1	0.6	8.3	7208	7208DB	7208DF	7208DT	35000	57500	25200	50500	7500	6000	10000	8000	47	45	73	75	1	0.6	0.380	7208
	80	18	1.1	0.6	16.2	7208B	7208BDB	7208BDF	7208BDT	33000	54000	23700	47500	6700	5300	9200	7200	47	45	73	75	1	0.6	0.380	7208B
	80	18	1.1	0.6	–2.1	7208C	7208CDB	7208CDF	7208CDT	36500	59500	25400	50500	13000	10000	18000	14000	47	47	73	75	1	0.6	0.380	7208C
	90	23	1.5	1	7.3	7308	7308DB	7308DF	7308DT	49000	79000	33000	66000	7000	5500	9200	7500	49	45	81	84.6	1.5	1	0.655	7308
	90	23	1.5	1	15.8	7308B	7308BDB	7308BDF	7308BDT	46000	75000	31000	62500	6300	5000	8500	6700	49	45	81	84.6	1.5	1	0.655	7308B
	90	23	1.5	1	–4.0	7308C	7308CDB	7308CDF	7308CDT	49500	80500	32500	65500	12000	9600	17000	13000	49	49	81	84.6	1.5	1	0.655	7308C
45	75	16	1	0.6	9.3	7009	7009DB	7009DF	7009DT	22200	36000	17600	35000	7500	6000	10000	8000	50	50	70	72	1	0.6	0.265	7009
	75	16	1	0.6	–1.1	7009C	7009CDB	7009CDF	7009CDT	24600	40000	19400	39000	13000	10000	18000	14000	50	50	70	72	1	0.6	0.265	7009C
	85	19	1.1	0.6	9.3	7209	7209DB	7209DF	7209DT	39500	64500	28800	57500	7000	5500	9200	7500	52	50	78	80	1	0.6	0.430	7209
	85	19	1.1	0.6	17.8	7209B	7209BDB	7209BDF	7209BDT	37000	60500	27100	54000	6300	5000	8500	6700	52	50	78	80	1	0.6	0.430	7209B
	85	19	1.1	0.6	–2.0	7209C	7209CDB	7209CDF	7209CDT	41000	66500	29000	58000	12000	9600	17000	13000	52	52	78	80	1	0.6	0.430	7209C
	100	25	1.5	1	8.4	7309	7309DB	7309DF	7309DT	63500	103000	43500	87000	6300	5000	8500	6700	54	50	91	94.6	1.5	1	0.875	7309
	100	25	1.5	1	18.0	7309B	7309BDB	7309BDF	7309BDT	60000	97500	41500	82500	5600	4500	7500	6000	54	50	91	94.6	1.5	1	0.875	7309B
	100	25	1.5	1	–4.1	7309C	7309CDB	7309CDF	7309CDT	63500	103000	43500	87000	11000	8800	15000	12000	54	54	91	94.6	1.5	1	0.875	7309C
50	80	16	1	0.6	10.8	7010	7010DB	7010DF	7010DT	23600	38500	20000	40000	7000	5500	9200	7500	55	55	75	77	1	0.6	0.285	7010
	80	16	1	0.6	–0.5	7010C	7010CDB	7010CDF	7010CDT	26200	42500	22000	44000	12000	9600	17000	13000	55	55	75	77	1	0.6	0.285	7010C
	90	20	1.1	0.6	10.2	7210	7210DB	7210DF	7210DT	41000	67000	31500	63000	6300	5300	8500	6700	57	55	83	85	1	0.6	0.485	7210
	90	20	1.1	0.6	19.4	7210B	7210BDB	7210BDF	7210BDT	38500	63000	29600	59000	5600	4500	7500	6000	57	55	83	85	1	0.6	0.485	7210B
	90	20	1.1	0.6	–1.9	7210C	7210CDB	7210CDF	7210CDT	43000	70000	32000	63500	11000	8800	16000	13000	57	57	83	85	1	0.6	0.485	7210C
	110	27	2	1	9.6	7310	7310DB	7310DF	7310DT	74000	121000	52000	104000	5600	4500	7500	6000	60	56	100	104	2	1	1.14	7310
	110	27	2	1	20.1	7310B	7310BDB	7310BDF	7310BDT	70500	114000	49500	98500	5000	4000	6700	5300	60	56	100	104	2	1	1.14	7310B
	110	27	2	1	–4.3	7310C	7310CDB	7310CDF	7310CDT	75500	122000	51000	102000	10000	8000	14000	11000	60	60	100	104	2	1	1.14	7310C
55	90	18	1.1	0.6	11.9	7011	7011DB	7011DF	7011DT	31000	50500	26200	52500	6300	5000	8500	6700	61	61	84	86	1	0.6	0.420	7011
	90	18	1.1	0.6	–0.6	7011C	7011CDB	7011CDF	7011CDT	34500	56000	28800	57500	11000	8800	15000	12000	61	61	84	86	1	0.6	0.420	7011C
	100	21	1.5	1	11.9	7211	7211DB	7211DF	7211DT	51000	83000	39500	79000	6000	4500	7500	6300	64	60	91	94.6	1.5	1	0.635	7211
	100	21	1.5	1	22.1	7211B	7211BDB	7211BDF	7211BDT	48000	78000	37500	74500	5300	4000	7000	5500	64	60	91	94.6	1.5	1	0.635	7211B
	100	21	1.5	1	–1.6	7211C	7211CDB	7211CDF	7211CDT	53000	86500	40000	80000	10000	8000	14000	11000	64	64	91	94.6	1.5	1	0.635	7211C
	120	29	2	1	10.8	7311	7311DB	7311DF	7311DT	85500	139000	61500	123000	5000	4000	7000	5500	65	61	110	114	2	1	1.45	7311
	120	29	2	1	22.3	7311B	7311BDB	7311BDF	7311BDT	81000	132000	58000	116000	4500	3500	6200	5000	65	61	110	114	2	1	1.45	7311B
	120	29	2	1	–4.4	7311C	7311CDB	7311CDF	7311CDT	87000	142000	60000	121000	9100	7300	13000	10000	65	65	110	114	2	1	1.45	7311C


Remarks: 1. “a” means the distance between back face and load center.
2. See page 122 regarding limiting speeds.

Angular Contact Ball Bearings Single Mounting / Duplex Mounting

Bore Diameter: 60～75mm

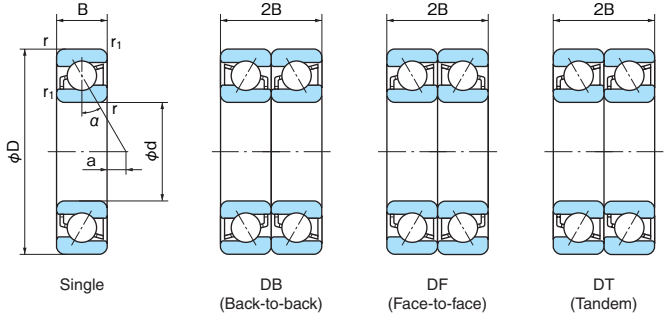



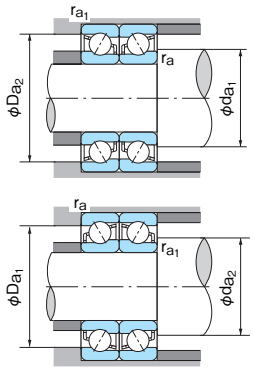

■Dynamic equivalent radial load

Pr=XFr+YFa

Contact angle	iFa/Cor	e	Single or DT Fa/Fr > e X	Single or DT Fa/Fr > e Y	DB or DF Fa/Fr ≦ e X	DB or DF Fa/Fr ≦ e Y	DB or DF Fa/Fr > e X	DB or DF Fa/Fr > e Y
15°	0.015	0.38		1.47		1.65		2.39
	0.029	0.40	0.44	1.40	1	1.57	0.72	2.28
	0.058	0.43		1.30		1.46		2.11
	0.087	0.46		1.23		1.38		2.00
	0.12	0.47	0.44	1.19	1	1.34	0.72	1.93
	0.17	0.50		1.12		1.26		1.82
	0.29	0.55		1.02		1.14		1.66
	0.44	0.56	0.44	1.00	1	1.12	0.72	1.63
	0.58	0.56		1.00		1.12		1.63
30°	—	0.8	0.39	0.76	1	0.78	0.63	1.24
40°	—	1.14	0.35	0.57	1	0.55	0.57	0.93

■i = 2 for DB or DF mounting
i = 1 for Single or DT mounting

■Single or DT mounting When Fa/Fr≦e, use Pr = Fr

■Static equivalent radial load

Por=XoFr+YoFa

Contact angle	Single or DT Xo	Single or DT Yo	DB or DF Xo	DB or DF Yo
15°	0.5	0.46	1	0.92
30°	0.5	0.33	1	0.66
40°	0.5	0.26	1	0.52

Single or DT mounting When Por＜Fr, use Pr = Fr


1N=0.102kgf


Boundary dimensions (mm) d	D	B	r (min)	r1 (min)	Load center (mm) a	Bearing No. Single	Duplex			Basic dynamic load rating Cr (N) Single	Duplex	Basic static load rating Cor (N) Single	Duplex	Limiting speed (min-1) Grease lubrication Single	Grease lubrication Duplex	Oil lubrication Single	Oil lubrication Duplex	Abutment and fillet dimensions (mm) da1 (min)	da2 (min)	Da1 (max)	Da2 (max)	ra (max)	ra1 (max)	Mass (kg) Single	Bearing No.
60	95	18	1.1	0.6	13.4	7012	7012DB	7012DF	7012DT	32000	51500	28000	56000	6000	4500	7600	6200	66	66	89	91	1	0.6	0.450	7012
	95	18	1.1	0.6	–0.1	7012C	7012CDB	7012CDF	7012CDT	35500	57500	30500	61500	10000	8000	14000	11000	66	66	89	91	1	0.6	0.450	7012C
	110	22	1.5	1	13.5	7212	7212DB	7212DF	7212DT	62000	100000	48500	97500	5300	4300	7100	5600	69	65	101	104.6	1.5	1	0.820	7212
	110	22	1.5	1	24.7	7212B	7212BDB	7212BDF	7212BDT	58000	94000	46000	92000	4800	3800	6300	5000	69	65	101	104.6	1.5	1	0.820	7212B
	110	22	1.5	1	–1.2	7212C	7212CDB	7212CDF	7212CDT	64500	105000	49500	98500	9400	7500	13000	10000	69	69	101	104.6	1.5	1	0.820	7212C
	130	31	2.1	1.1	11.9	7312	7312DB	7312DF	7312DT	98000	159000	71500	148000	4800	3800	6300	5000	72	67	118	123	2	1	1.81	7312
	130	31	2.1	1.1	24.4	7312B	7312BDB	7312BDF	7312BDT	92500	151000	67500	135000	4300	3400	5500	4500	72	67	118	123	2	1	1.81	7312B
	130	31	2.1	1.1	–4.5	7312C	7312CDB	7312CDF	7312CDT	99500	162000	70000	140000	8400	6700	12000	9600	72	72	118	123	2	1	1.81	7312C
65	100	18	1.1	0.6	14.8	7013	7013DB	7013DF	7013DT	33500	54500	31000	62500	5600	4300	7100	6000	71	71	94	96	1	0.6	0.470	7013
	100	18	1.1	0.6	0.5	7013C	7013CDB	7013CDF	7013CDT	37500	60500	34500	69000	9700	7800	13000	10000	71	71	94	96	1	0.6	0.470	7013C
	120	23	1.5	1	15.2	7213	7213DB	7213DF	7213DT	70000	114000	57800	116000	4900	3900	6500	5300	74	70	111	114.6	1.5	1	1.02	7213
	120	23	1.5	1	27.4	7213B	7213BDB	7213BDF	7213BDT	66000	107000	54500	109000	4300	3400	5600	4600	74	70	111	114.6	1.5	1	1.02	7213B
	120	23	1.5	1	–0.8	7213C	7213CDB	7213CDF	7213CDT	73500	120000	59000	118000	8600	6900	12000	9600	74	74	111	114.6	1.5	1	1.02	7213C
	140	33	2.1	1.1	13.1	7313	7313DB	7313DF	7313DT	111000	180000	82000	165000	4400	3600	5800	4700	77	72	128	133	2	1	2.22	7313
	140	33	2.1	1.1	26.6	7313B	7313BDB	7313BDF	7313BDT	105000	170000	77500	155000	4000	3200	5300	4200	77	72	128	133	2	1	2.22	7313B
	140	33	2.1	1.1	–4.7	7313C	7313CDB	7313CDF	7313CDT	113000	183000	81000	162000	7800	6200	11000	8800	77	77	128	133	2	1	2.22	7313C
70	110	20	1.1	0.6	16.0	7014	7014DB	7014DF	7014DT	42500	69000	39500	78500	5000	4000	6600	5300	76	76	104	106	1	0.6	0.660	7014
	110	20	1.1	0.6	0.4	7014C	7014CDB	7014CDF	7014CDT	47000	76500	43000	86500	8900	7100	12000	9600	76	76	104	106	1	0.6	0.660	7014C
	125	24	1.5	1	16.1	7214	7214DB	7214DF	7214DT	76500	124000	63500	127000	4500	3800	6300	5000	79	75	116	119.6	1.5	1	1.12	7214
	125	24	1.5	1	29.0	7214B	7214BDB	7214BDF	7214BDT	71500	116000	59500	120000	4300	3200	5600	4500	79	75	116	119.6	1.5	1	1.12	7214B
	125	24	1.5	1	–0.7	7214C	7214CDB	7214CDF	7214CDT	80000	130000	65000	130000	8200	6600	11000	8800	79	79	116	119.6	1.5	1	1.12	7214C
	150	35	2.1	1.1	14.3	7314	7314DB	7314DF	7314DT	125000	203000	94000	188000	4000	3200	5300	4300	82	77	138	143	2	1	2.70	7314
	150	35	2.1	1.1	28.7	7314B	7314BDB	7314BDF	7314BDT	118000	191000	88500	177000	3600	2900	4800	3900	82	77	138	143	2	1	2.70	7314B
	150	35	2.1	1.1	–4.8	7314C	7314CDB	7314CDF	7314CDT	127000	206000	92500	185000	7300	5800	10000	8000	82	82	138	143	2	1	2.70	7314C
75	115	20	1.1	0.6	17.4	7015	7015DB	7015DF	7015DT	43500	70500	41500	83000	4800	3800	6300	5000	81	81	109	111	1	0.6	0.695	7015
	115	20	1.1	0.6	1.0	7015C	7015CDB	7015CDF	7015CDT	48500	78500	46000	92000	8400	6700	12000	9600	81	81	109	111	1	0.6	0.695	7015C
	130	25	1.5	1	17.1	7215	7215DB	7215DF	7215DT	79000	129000	68500	137000	4300	3400	5800	4700	84	80	121	124.6	1.5	1	1.23	7215
	130	25	1.5	1	30.6	7215B	7215BDB	7215BDF	7215BDT	74000	120000	64000	128000	4000	3200	5300	4300	84	80	121	124.6	1.5	1	1.23	7215B
	130	25	1.5	1	–0.7	7215C	7215CDB	7215CDF	7215CDT	83500	135000	70000	141000	7800	6200	11000	8800	84	84	121	124.6	1.5	1	1.23	7215C
	160	37	2.1	1.1	15.4	7315	7315DB	7315DF	7315DT	136000	221000	106000	212000	3800	3000	5000	4000	87	82	148	153	2	1	3.15	7315
	160	37	2.1	1.1	30.9	7315B	7315BDB	7315BDF	7315BDT	128000	208000	100000	200000	3400	2700	4500	3600	87	82	148	153	2	1	3.15	7315B
	160	37	2.1	1.1	–4.9	7315C	7315CDB	7315CDF	7315CDT	138000	225000	104000	209000	6800	5400	9400	7500	87	87	148	153	2	1	3.15	7315C


Remarks: 1. “a” means the distance between back face and load center.
2. See page 122 regarding limiting speeds.

Angular Contact Ball Bearings Single Mounting / Duplex Mounting

Bore Diameter: 80～95mm

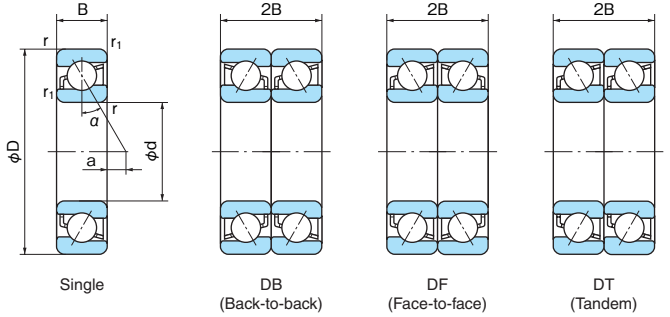



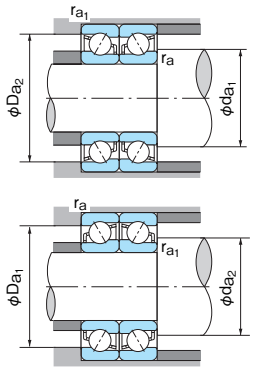

■Dynamic equivalent radial load

Pr=XFr+YFa

Contact angle	iFa/Cor	e	Single or DT Fa/Fr > e X	Single or DT Fa/Fr > e Y	DB or DF Fa/Fr ≦ e X	DB or DF Fa/Fr ≦ e Y	DB or DF Fa/Fr > e X	DB or DF Fa/Fr > e Y
15°	0.015	0.38		1.47		1.65		2.39
	0.029	0.40	0.44	1.40	1	1.57	0.72	2.28
	0.058	0.43		1.30		1.46		2.11
	0.087	0.46		1.23		1.38		2.00
	0.12	0.47	0.44	1.19	1	1.34	0.72	1.93
	0.17	0.50		1.12		1.26		1.82
	0.29	0.55		1.02		1.14		1.66
	0.44	0.56	0.44	1.00	1	1.12	0.72	1.63
	0.58	0.56		1.00		1.12		1.63
30°	—	0.8	0.39	0.76	1	0.78	0.63	1.24
40°	—	1.14	0.35	0.57	1	0.55	0.57	0.93

■i = 2 for DB or DF mounting
i = 1 for Single or DT mounting

■Single or DT mounting When Fa/Fr≦e, use Pr = Fr

■Static equivalent radial load

Por=XoFr+YoFa

Contact angle	Single or DT X0	Single or DT Y0	DB or DF X0	DB or DF Y0
15°	0.5	0.46	1	0.92
30°	0.5	0.33	1	0.66
40°	0.5	0.26	1	0.52

Single or DT mounting When Por＜Fr, use Pr = Fr

1N=0.102kgf

Boundary dimensions (mm) d	D	B	r (min)	r1 (min)	Load center (mm) a	Bearing No. Single	Duplex			Basic dynamic load rating Cr (N) Single	Duplex	Basic static load rating Cor (N) Single	Duplex	Limiting speed (min-1) Grease lubrication Single	Grease lubrication Duplex	Oil lubrication Single	Oil lubrication Duplex	Abutment and fillet dimensions (mm) da1 (min)	da2 (min)	Da1 (max)	Da2 (max)	ra (max)	ra1 (max)	Mass (kg) Single	Bearing No.
80	125	22	1.1	0.6	18.6	7016	7016DB	7016DF	7016DT	53500	86500	50500	101000	4400	3500	5800	4600	86	86	119	121	1	0.6	0.925	7016
	125	22	1.1	0.6	0.8	7016C	7016CDB	7016CDF	7016CDT	59000	96000	55500	111000	7800	6200	11000	8800	86	86	119	121	1	0.6	0.925	7016C
	140	26	2	1	18.8	7216	7216DB	7216DF	7216DT	89000	145000	76500	153000	4000	3200	5400	4300	90	86	130	134	2	1	1.50	7216
	140	26	2	1	33.2	7216B	7216BDB	7216BDF	7216BDT	83500	135000	71500	143000	3600	2800	5000	4000	90	86	130	134	2	1	1.50	7216B
	140	26	2	1	–0.3	7216C	7216CDB	7216CDF	7216CDT	93500	152000	78000	156000	7300	5800	10000	8000	90	90	130	134	2	1	1.50	7216C
	170	39	2.1	1.1	16.6	7316	7316DB	7316DF	7316DT	147000	239000	119000	238000	3600	2800	4800	3800	92	87	158	163	2	1	4.18	7316
	170	39	2.1	1.1	33.0	7316B	7316BDB	7316BDF	7316BDT	139000	226000	112000	225000	3200	2500	4200	3400	92	87	158	163	2	1	4.18	7316B
	170	39	2.1	1.1	–5.1	7316C	7316CDB	7316CDF	7316CDT	150000	243000	117000	235000	6400	5100	8800	7000	92	92	158	163	2	1	4.18	7316C
85	130	22	1.1	0.6	20	7017	7017DB	7017DF	7017DT	54500	88500	53500	107000	4100	3300	5500	4400	91	91	124	126	1	0.6	0.960	7017
	130	22	1.1	0.6	1.4	7017C	7017CDB	7017CDF	7017CDT	60500	98500	59000	118000	7400	5900	10000	8000	91	91	124	126	1	0.6	0.960	7017C
	150	28	2	1	19.9	7217	7217DB	7217DF	7217DT	103000	167000	89500	179000	3800	3000	5000	4000	95	91	140	144	2	1	1.87	7217
	150	28	2	1	35.4	7217B	7217BDB	7217BDF	7217BDT	96500	159000	83500	168000	3400	2600	4500	3800	95	91	140	144	2	1	1.87	7217B
	150	28	2	1	–0.4	7217C	7217CDB	7217CDF	7217CDT	100000	163000	85000	170000	6800	5400	9400	7500	95	95	140	144	2	1	1.87	7217C
	180	41	3	1.1	17.7	7317	7317DB	7317DF	7317DT	159000	258000	133000	266000	3400	2600	4500	3600	99	92	166	173	2.5	1	4.90	7317
	180	41	3	1.1	35.2	7317B	7317BDB	7317BDF	7317BDT	150000	244000	125000	251000	3000	2400	4000	3200	99	92	166	173	2.5	1	4.90	7317B
	180	41	3	1.1	–5.2	7317C	7317CDB	7317CDF	7317CDT	162000	263000	131000	262000	6000	4800	8300	6600	99	99	166	173	2.5	1	4.90	7317C
90	140	24	1.5	1	21.2	7018	7018DB	7018DF	7018DT	65000	106000	63000	126000	3800	3200	5200	4200	97	97	133	135.6	1.5	1	1.26	7018
	140	24	1.5	1	1.3	7018C	7018CDB	7018CDF	7018CDT	72000	117000	69500	139000	7000	5600	9600	7800	97	97	133	135.6	1.5	1	1.26	7018C
	160	30	2	1	21.1	7218	7218DB	7218DF	7218DT	118000	191000	103000	206000	3500	2800	4700	3700	100	96	150	154	2	1	2.30	7218
	160	30	2	1	37.5	7218B	7218BDB	7218BDF	7218BDT	110000	179000	97000	194000	3200	2500	4300	3400	100	96	150	154	2	1	2.30	7218B
	160	30	2	1	–0.6	7218C	7218CDB	7218CDF	7218CDT	124000	201000	105000	211000	6400	5100	8800	7000	100	100	150	154	2	1	2.30	7218C
	190	43	3	1.1	18.9	7318	7318DB	7318DF	7318DT	171000	277000	147000	295000	3200	2600	4300	3400	104	97	176	183	2.5	1	5.76	7318
	190	43	3	1.1	37.3	7318B	7318BDB	7318BDF	7318BDT	161000	262000	139000	278000	2800	2300	3800	3000	104	97	176	183	2.5	1	5.76	7318B
	190	43	3	1.1	–5.3	7318C	7318CDB	7318CDF	7318CDT	174000	282000	146000	291000	5700	4600	7900	6300	104	104	176	183	2.5	1	5.76	7318C
95	145	24	1.5	1	22.6	7019	7019DB	7019DF	7019DT	67000	109000	66500	133000	3800	3100	5200	4200	102	102	138	140.6	1.5	1	1.36	7019
	145	24	1.5	1	1.9	7019C	7019CDB	7019CDF	7019CDT	74000	120000	73500	147000	6700	5400	9200	7400	102	102	138	140.6	1.5	1	1.36	7019C
	170	32	2.1	1.1	22.2	7219	7219DB	7219DF	7219DT	126000	205000	112000	225000	3400	2600	4500	3600	107	102	158	163	2	1	2.78	7219
	170	32	2.1	1.1	39.7	7219B	7219BDB	7219BDF	7219BDT	120000	195000	105000	210000	3000	2400	4000	3200	107	102	158	163	2	1	2.78	7219B
	170	32	2.1	1.1	–0.7	7219C	7219CDB	7219CDF	7219CDT	133000	217000	115000	230000	6000	4800	8300	6600	107	107	158	163	2	1	2.78	7219C
	200	45	3	1.1	20.1	7319	7319DB	7319DF	7319DT	183000	297000	163000	325000	3000	2400	4000	3200	109	102	186	193	2.5	1	6.68	7319
	200	45	3	1.1	39.5	7319B	7319BDB	7319BDF	7319BDT	172000	280000	153000	305000	2500	2200	3600	3000	109	102	186	193	2.5	1	6.68	7319B
	200	45	3	1.1	–5.5	7319C	7319CDB	7319CDF	7319CDT	186000	300000	161000	320000	5400	4300	7500	6000	109	109	186	193	2.5	1	6.68	7319C

Remarks: 1. “a” means the distance between back face and load center.
2. See page 122 regarding limiting speeds.