
NTN®

Ball and Roller Bearings

CAT.No.2203/E



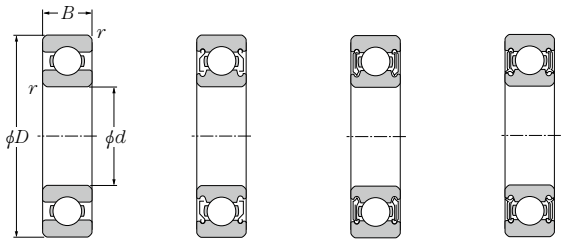


Open type | Shielded type (ZZ) | Non-contact sealed type (LLB) | Contact sealed type (LLU)


d 65 ～ 85mm

Boundary dimensions mm					Basic load rating kN		Fatigue load limit kN	Factor	Allowable speed min^{-1}			Bearing number			
					dynamic	static			Grease	Oil					
d	D	B	$r_{s\,min}$[1]	r_{NS} Min.	C_r	C_{0r}	C_u	f_0	Open type, ZZ, LLB Z, LB	Open type, Z, LB	LLU LU	Open type	Shielded or sealed type[2] (See drawings)		
65	85	10	0.6	0.5	12.8	11.0	0.730	16.2	7 400	8 700	4 100	**6813**	**ZZ**	**LLB**	**LLU**
	90	13	1	0.5	19.3	16.1	1.07	16.6	7 000	8 200	4 000	**6913**	**ZZ**	**LLB**	**LLU**
	100	11	0.6	—	22.7	18.7	1.26	16.5	6 500	7 700	—	**16013**	—	—	—
	100	18	1.1	0.5	34.0	25.2	1.83	15.8	6 500	7 700	3 900	**6013**	**ZZ**	**LLB**	**LLU**
	120	23	1.5	0.5	63.5	40.0	3.15	14.4	5 500	6 500	3 600	**6213**	**ZZ**	**LLB**	**LLU**
	140	33	2.1	0.5	103	60.0	4.60	13.2	4 900	5 800	3 300	**6313**	**ZZ**	**LLB**	**LLU**
	160	37	2.1	—	123	72.5	5.35	12.7	4 400	5 200	—	**6413**	—	—	—
70	90	10	0.6	0.5	13.4	11.9	0.795	16.1	6 900	8 100	3 800	**6814**	**ZZ**	**LLB**	**LLU**
	100	16	1	0.5	26.3	21.2	1.45	16.3	6 500	7 700	3 700	**6914**	**ZZ**	**LLB**	**LLU**
	110	13	0.6	—	27.0	22.6	1.52	16.5	6 100	7 100	—	**16014**	—	—	—
	110	20	1.1	0.5	42.0	31.0	2.30	15.6	6 100	7 100	3 600	**6014**	**ZZ**	**LLB**	**LLU**
	125	24	1.5	0.5	69.0	44.0	3.45	14.5	5 100	6 000	3 400	**6214**	**ZZ**	**LLB**	**LLU**
	150	35	2.1	0.5	115	68.0	5.10	13.2	4 600	5 400	3 100	**6314**	**ZZ**	**LLB**	**LLU**
	180	42	3	—	142	89.5	6.25	12.7	4 100	4 800	—	**6414**	—	—	—
75	95	10	0.6	0.5	13.9	12.9	0.855	16.0	6 400	7 600	3 600	**6815**	**ZZ**	**LLB**	**LLU**
	105	16	1	0.5	27.0	22.6	1.52	16.5	6 100	7 200	3 500	**6915**	**ZZ**	**LLB**	**LLU**
	115	13	0.6	—	27.6	24.0	1.60	16.6	5 700	6 700	—	**16015**	—	—	—
	115	20	1.1	0.5	44.0	33.5	2.44	15.8	5 700	6 700	3 300	**6015**	**ZZ**	**LLB**	**LLU**
	130	25	1.5	0.5	73.5	49.5	3.80	14.7	4 800	5 600	3 200	**6215**	**ZZ**	**LLB**	**LLU**
	160	37	2.1	0.5	126	77.0	5.55	13.2	4 300	5 000	2 900	**6315**	**ZZ**	**LLB**	**LLU**
	190	45	3	—	152	99.0	6.70	12.7	3 800	4 500	—	**6415**	—	—	—
80	100	10	0.6	0.5	14.0	13.3	0.885	16.0	6 000	7 100	3 400	**6816**	**ZZ**	**LLB**	**LLU**
	110	16	1	0.5	27.6	24.0	1.59	16.6	5 700	6 700	3 200	**6916**	**ZZ**	**LLB**	**LLU**
	125	14	0.6	—	28.1	25.1	1.64	16.4	5 300	6 200	—	**16016**	—	—	—
	125	22	1.1	0.5	53.0	40.0	2.91	15.6	5 300	6 200	3 100	**6016**	**ZZ**	**LLB**	**LLU**
	140	26	2	0.5	80.5	53.0	3.95	14.6	4 500	5 300	3 000	**6216**	**ZZ**	**LLB**	**LLU**
	170	39	2.1	0.5	136	86.5	6.05	13.3	4 000	4 700	2 700	**6316**	**ZZ**	**LLB**	**LLU**
	200	48	3	—	181	125	8.20	12.3	3 600	4 200	—	**6416**	—	—	—
85	110	13	1	0.5	20.7	19.0	1.26	16.2	5 700	6 700	3 100	**6817**	**ZZ**	**LLB**	**LLU**
	120	18	1.1	0.5	35.5	29.6	1.99	16.4	5 400	6 300	3 000	**6917**	**ZZ**	**LLB**	**LLU**
	130	14	0.6	—	28.7	26.2	1.68	16.4	5 000	5 900	—	**16017**	—	—	—
	130	22	1.1	0.5	55.0	43.0	3.00	15.8	5 000	5 900	2 900	**6017**	**ZZ**	**LLB**	**LLU**
	150	28	2	0.5	92.0	64.0	4.60	14.7	4 200	5 000	2 800	**6217**	**ZZ**	**LLB**	**LLU**
	180	41	3	0.5	147	97.0	6.55	13.3	3 800	4 500	2 600	**6317**	**ZZ**	**LLB**	**LLU**

1) Smallest allowable dimension for chamfer dimension r. 2) This bearing number is for double sealed and double shielded type bearings, but single sealed and single shielded type are also available.



With snap ring groove

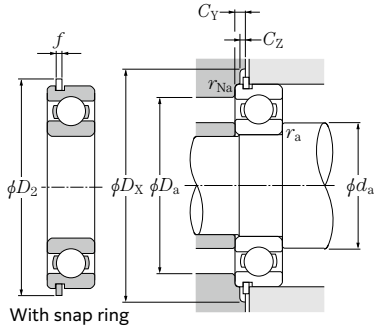

With snap ring

Dynamic equivalent radial load
$P_r = XF_r + YF_a$

$\frac{f_0 F_a}{C_{0r}}$	e	$\frac{F_a}{F_r} \leqq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.30				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1.00

Static equivalent radial load
$P_{0r} = 0.6F_r + 0.5F_a$
When $P_{0r} < F_r$ use $P_{0r} = F_r$.

Bearing number		Snap ring groove dimensions mm				Snap ring dimensions mm		Installation-related dimensions mm								Mass[5] kg
Groove / Snap ring[3] (See drawings)		D_1 Max.	a Max.	b Min.	r_o Max.	D_2 Max.	f Max.	d_a Min.	d_a Max.[4]	D_a Max.	D_X (approx.)	C_Y Max.	C_Z Min.	r_{as} Max.	r_{Nas} Max.	(approx.)
N	**NR**	82.9	1.7	1.3	0.4	89.4	1.12	69	70	81	91	2.5	1.2	0.6	0.5	0.128
N	**NR**	87.9	2.1	1.3	0.4	94.4	1.12	70	71.5	85	96	2.9	1.2	1	0.5	0.206
—	—	—	—	—	—	—	—	69	—	96	—	—	—	0.6	—	0.307
N	**NR**	96.8	2.87	2.7	0.6	106.5	2.46	71.5	74	93.5	108	5	2.5	1	0.5	0.421
N	**NR**	115.21	4.06	3.1	0.6	129.7	2.82	73	80.5	112	131.5	6.5	2.9	1.5	0.5	0.99
N	**NR**	135.23	4.9	3.1	0.6	149.7	2.82	76	86	129	152	7.3	2.9	2	0.5	2.08
—	—	—	—	—	—	—	—	76	—	149	—	—	—	2	—	3.3
N	**NR**	87.9	1.7	1.3	0.4	94.4	1.12	74	75.5	86	96	2.5	1.2	0.6	0.5	0.137
N	**NR**	97.9	2.5	1.3	0.4	104.4	1.12	75	77.5	95	106	3.3	1.2	1	0.5	0.334
—	—	—	—	—	—	—	—	74	—	106	—	—	—	0.6	—	0.441
N	**NR**	106.81	2.87	2.7	0.6	116.6	2.46	76.5	80.5	103.5	118	5	2.5	1	0.5	0.604
N	**NR**	120.22	4.06	3.1	0.6	134.7	2.82	78	85	117	136.5	6.5	2.9	1.5	0.5	1.07
N	**NR**	145.24	4.9	3.1	0.6	159.7	2.82	81	92.5	139	162	7.3	2.9	2	0.5	2.52
—	—	—	—	—	—	—	—	83	—	167	—	—	—	2.5	—	4.83
N	**NR**	92.9	1.7	1.3	0.4	99.4	1.12	79	80	91	101	2.5	1.2	0.6	0.5	0.145
N	**NR**	102.6	2.5	1.3	0.4	110.7	1.12	80	82.5	100	112	3.3	1.2	1	0.5	0.353
—	—	—	—	—	—	—	—	79	—	111	—	—	—	0.6	—	0.464
N	**NR**	111.81	2.87	2.7	0.6	121.6	2.46	81.5	85.5	108.5	123	5	2.5	1	0.5	0.649
N	**NR**	125.22	4.06	3.1	0.6	139.7	2.82	83	90.5	122	141.5	6.5	2.9	1.5	0.5	1.18
N	**NR**	155.22	4.9	3.1	0.6	169.7	2.82	86	99	149	172	7.3	2.9	2	0.5	3.02
—	—	—	—	—	—	—	—	88	—	177	—	—	—	2.5	—	5.72
N	**NR**	97.9	1.7	1.3	0.4	104.4	1.12	84	85	96	106	2.5	1.2	0.6	0.5	0.154
N	**NR**	107.6	2.5	1.3	0.4	115.7	1.12	85	88	105	117	3.3	1.2	1	0.5	0.373
—	—	—	—	—	—	—	—	84	—	121	—	—	—	0.6	—	0.597
N	**NR**	120.22	2.87	3.1	0.6	134.7	2.82	86.5	91.5	118.5	136.5	5.3	2.9	1	0.5	0.854
N	**NR**	135.23	4.9	3.1	0.6	149.7	2.82	89	95.5	131	152	7.3	2.9	2	0.5	1.4
N	**NR**	163.65	5.69	3.5	0.6	182.9	3.1	91	105	159	185	8.4	3.1	2	0.5	3.59
—	—	—	—	—	—	—	—	93	—	187	—	—	—	2.5	—	6.76
N	**NR**	107.6	2.1	1.3	0.4	115.7	1.12	90	91	105	117	2.9	1.2	1	0.5	0.27
N	**NR**	117.6	3.3	1.3	0.4	125.7	1.12	91.5	94	113.5	127	4.1	1.2	1	0.5	0.536
—	—	—	—	—	—	—	—	89	—	126	—	—	—	0.6	—	0.626
N	**NR**	125.22	2.87	3.1	0.6	139.7	2.82	91.5	97	123.5	141.5	5.3	2.9	1	0.5	0.89
N	**NR**	145.24	4.9	3.1	0.6	159.7	2.82	94	103	141	162	7.3	2.9	2	0.5	1.79
N	**NR**	173.66	5.69	3.5	0.6	192.9	3.1	98	112	167	195	8.4	3.1	2.5	0.5	4.23

3) Sealed and shielded bearings are also available. 4) This dimension applies to sealed and shielded bearings.
5) Does not include bearings with snap rings.