
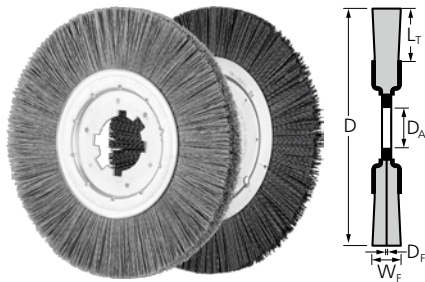


Wheel brushes

crimped, with hole



RBU, slim, stationary

Ideal for processing aluminium due to the longer trim length and higher degree of flexibility. Suitable for use on stationary machines, automated centres and robots.



Special features:

- The special design enables bunching to create wide gapless rollers. This enables a uniform surface finish to be achieved.
- Highly flexible, enabling optimal adjustment to the workpiece contour.


D [mm]	W _F [mm]	L _T [mm]	Grit size	D _F [mm]	Opt. RPM	Max. RPM		Item no.	Designation
-----------	------------------------	------------------------	-----------	------------------------	----------	-------------	--	----------	-------------

Silicon carbide (SiC) plastic filament

200	13	43	120	0.55	2,400 – 3,900	6,000	1	43505904	RBU 20013/50,8 SiC 120 0,55
			180	0.90	2,400 – 3,900	6,000	1	43505914	RBU 20013/50,8 SiC 180 0,90
			320	0.55	2,400 – 3,900	6,000	1	43505924	RBU 20013/50,8 SiC 320 0,55
250	15	55	120	0.55	1,400 – 2,300	3,600	1	43506514	RBU 25015/50,8 SiC 120 0,55
			180	0.90	1,400 – 2,300	3,600	1	43506524	RBU 25015/50,8 SiC 180 0,90
			320	0.55	1,400 – 2,300	3,600	1	43506534	RBU 25015/50,8 SiC 320 0,55

Ceramic oxide grain (CO) plastic filament

200	13	46	120	1.10	2,400 – 3,900	6,000	1	43505930	RBU 20013/50,8 CO 120 1,10
250	15	63	120	1.10	1,400 – 2,300	3,600	1	43506540	RBU 25015/50,8 CO 120 1,10

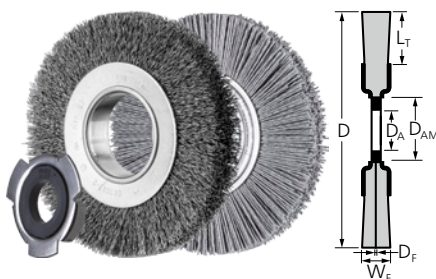

RBU, wide, universal use

Excellent for medium-duty hand-held or automated brushing of workpieces with large surfaces. Developed for general use in the workshop.



Special features:

- Can be used with all commercially available stationary drive systems and bench grinders thanks to the variable hole diameter.
- Highly flexible, enabling optimal adjustment to the workpiece contour.

D [mm]	W _F [mm]	L _T [mm]	D _A [mm]	D _{AM} [mm]	Grit size	D _F [mm]	Opt. RPM	Max. RPM		Item no.	Designation
-----------	------------------------	------------------------	------------------------	-------------------------	-----------	------------------------	----------	-------------	--	----------	-------------

Steel wire (ST)

80	20	20	10/12/14	20	-	0.15	5,000 – 7,500	10,000	1	43701103	POS RBU 8020/20 ST 0,15
						0.20	5,000 – 7,500	10,000	1	43701104	POS RBU 8020/20 ST 0,20
100	20	25	12/14/18/22.2/25.4	30	-	0.30	4,000 – 6,000	8,000	1	43701105	POS RBU 10020/14,0 ST 0,30
	28	25	12/14/18/22.2/25.4	30	-	0.30	4,000 – 6,000	8,000	1	43701109	POS RBU 10028/14,0 ST 0,30
125	20	30	12/14/18/22.2/25.4	30	-	0.30	3,000 – 4,500	6,000	1	43701115	POS RBU 12520/14,0 ST 0,30
	28	30	12/14/18/22.2/25.4	30	-	0.30	3,000 – 4,500	6,000	1	43701119	POS RBU 12528/14,0 ST 0,30
150	25	25	AK 32-2	50.8	-	0.20	3,000 – 4,500	6,000	1	43701205	POS RBU 15025/AK32-2 ST 0,20
						0.30	3,000 – 4,500	6,000	1	43701209	POS RBU 15025/AK32-2 ST 0,30

Continued on next page