


Arbor for wheel brushes

Enable use of wheel brushes with arbor hole on tool drives with collet, e.g. electric straight grinders and flexible shaft drives.

Special features:

- Secure hold of the brush thanks to highly accurate fit.

D_s [mm]	Suitable for brush diameter [mm]	Suitable for hole diameter D_A / D_M [mm]	Suitable for		Item no.	Designation
8	100, 115, 125	12, 14	Wheel brushes RBU	1	43595061	BO 8/12-14 100-125
		22.2	Wheel brushes RBG	1	43595051	BO 8/22,2 100-125
12	150, 180	22.2	Wheel brushes RBU, RBUP and RBG	1	43595062	BO 12/22,2 150-180
	200	22.2	Wheel brushes RBU, RBUP and RBG	1	43595063	BO 12/22,2 200



Arbor for composite disc brushes

Enable use of composite disc brushes with arbor hole. Suitable for stationary applications with threaded cup brushes on CNC machines, automated centres and robots.

Special features:

- Secure hold of the brush thanks to highly accurate fit.

D_s [mm]	Suitable for brush diameter [mm]	Suitable for hole diameter D_A / D_M [mm]	Suitable for		Item no.	Designation
12	75-100	22.2	Composite disc brushes DBU	1	43595104	BO 12/22,2 75-100
	125-150	22.2	Composite disc brushes DBU	1	43595105	BO 12/22,2 125-150



Arbor for POLISCRATCH

For mounting POLISCRATCH brushes on straight grinders, flexible shafts or power drills.

Special features:

- Secure hold of the brush thanks to highly accurate fit.

D_T	D_s [mm]	Suitable for		Item no.	Designation
M14x2	8	Wheel brushes RBU, POLISCRATCH	1	43595014	BO 8/M14




Arbor for cup brushes

Enable the use of cup brushes on tool drives with a collet. Also suitable for stationary applications with threaded cup brushes on CNC machines, automated centres and robots. Weldon shank according to DIN 6535.

Special features:

- Secure hold of the brush thanks to highly accurate fit.

D_s [mm]	Suitable for brush diameter [mm]	Suitable for		Item no.	Designation
12	65-80	Cup brushes TBG and TBU	1	79183976	BO 12/SW22 65-80
20	100	Cup brushes TBG and TBU	1	79183977	BO 20/SW27 100

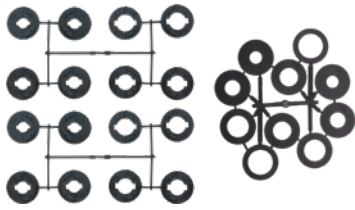

Adapter set AK 32

The adapter set AK 32 is suitable for wheel brushes with a brush diameter from 150 mm in the narrow versions.

Special features:

- Enable the use of brushes on all tool drives as the hole diameter is adjusted to the required dimension.
- Secure hold of the brush thanks to highly accurate fit.

Suitable for	Centre hole dia. D_A included [mm/inch]		Item no.	Designation
RBU, slim type $\geq$ dia. 150 mm	20/18/14/12/25.4 (1)/22.2 (7/8)/16 (5/8)/12.7 (1/2)	1	43690100	AS AK 32



Adapter set AK 32-2

The adapter set AK 32-2 is suitable for wheel brushes with a brush diameter from 150 mm in the wide versions.

Special features:

- Enable the use of brushes on all tool drives as the hole diameter is adjusted to the required dimension.
- Secure hold of the brush thanks to highly accurate fit.

Suitable for	Centre hole dia. D_A included [mm/inch]		Item no.	Designation
RBU, wide type $\geq$ dia. 150 mm	31.75/20/18/14/12/25.4 (1)/22.2 (7/8)/19.2 (3/4)/16 (5/8)/12.7 (1/2)	1	43690102	AS AK 32-2



Adapter pairs AM 50.8-C

The adapter pair AM 50.8-C is suitable for wheel brushes with a brush diameter from 150 mm in the wide and composite versions.


Contents:

An AM 50.8-C set contains 1 adapter pair.

Special features:

- Enable the use of brushes on all tool drives as the hole diameter is adjusted to the required dimension.
- Secure hold of the brush thanks to highly accurate fit.

Suitable for	Centre hole dia. D_A included [mm/inch]		Item no.	Designation
RBU, wide type $\geq$ dia. 150 mm, RBUP, composite type $\geq$ dia. 150 mm	14	1	43690014	AP AM 50,8/14,0
	16	1	43690016	AP AM 50,8/16,0
	20	1	43690020	AP AM 50,8/20,0
	22.2	1	43690022	AP AM 50,8/22,2
	25.4	1	43690025	AP AM 50,8/25,4
	30	1	43690030	AP AM 50,8/30,0
	32	1	43690032	AP AM 50,8/32,0
	35	1	43690033	AP AM 50,8/35,0



Adapter pair APM 50.8

The adapter pair APM 50.8 is suitable for knotted wheel brushes with diameter 200–250 mm and crimped wheel brushes designed as deburring brushes.

Contents:

An APM 50.8 set contains 3 adapter pairs.

Special features:

- Enable the use of brushes on all tool drives as the hole diameter is adjusted to the required dimension.
- Secure hold of the brush thanks to highly accurate fit.

Suitable for	Centre hole dia. D _A included [mm/inch]		Item no.	Designation
RBG, knotted wheel brushes, dia. 200–250 mm, RBU, deburring brush type dia. 200–250 mm	16/18/20	1	43690035	APM 50,8/16-20
	22.2/25.4/30	1	43690036	APM 50,8/22,2-30
	32/35/40	1	43690037	APM 50,8/32-40

Accessories for tube brushes



Quick-change handle SWG


Suitable for manual work with tube brushes.



Special features:

- Comfortable to use thanks to ergonomic shape.
- Combine with the IBUV extensions in order to access hard-to-reach areas.

L [mm]	Thread		Item no.	Designation
135	M6	1	43690208	SWG-M6
	3/8 BSW	1	43690209	SWG-3/8 BSW
	1/2 BSW	1	43690207	SWG-1/2 BSW
150	Collet 6 mm	1	43690210	SWG-6




IBUV extension

Suitable for work with tube brushes with a thread.

Special features:

- Optimal access to hard-to-reach areas.
- To achieve a longer overall length, combine the IBUV extensions with the IBUS wire stems or with the SWG quick-change handles.

L [mm]	Thread	Outer dia. of screw socket [mm]		Item no.	Designation
300	M6	12	1	43690211	IBUV M6 300
	3/8 BSW	12	1	43690212	IBUV 3/8 BSW 300
	1/2 BSW	16	1	43690203	IBUV 1/2 BSW 300
1,000	M6	12	1	43690200	IBUV M6 1000
	3/8 BSW	12	1	43690201	IBUV 3/8 BSW 1000
	1/2 BSW	16	1	43690202	IBUV 1/2 BSW 1000




IBUS wire stem

Suitable for work with tube brushes with a thread.

- Special features:**

 - Optimal access to hard-to-reach areas.
- To achieve a longer overall length, combine the IBUS wire stem with the IBUV extensions.

L [mm]	Thread	Outer dia. of screw socket [mm]		Item no.	Designation
300	M6	12	1	43690213	IBUS M6 300
	3/8 BSW	12	1	43690214	IBUS 3/8 BSW 300
	1/2 BSW	16	1	43690215	IBUS 1/2 BSW 300
1,000	M6	12	1	43690204	IBUS M6 1000
	3/8 BSW	12	1	43690205	IBUS 3/8 BSW 1000
	1/2 BSW	16	1	43690216	IBUS 1/2 BSW 1000

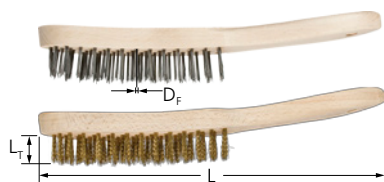

HBU, universal use

Generally suitable for all light cleaning and derusting work.



Special features:

- Optimum presentation on the PFERD TOOLS CENTER using hanging hole and labelling with EAN number, designation and filament material.

Rows	L _T [mm]	L [mm]	D _F [mm]		Item no.	Designation
------	------------------------	-----------	------------------------	---	----------	-------------

Steel wire (ST)

1	25	290	0.35	10	43670011	HBU 10 ST 0,35
2	25	290	0.35	10	43671001	HBU 20 ST 0,35
3	25	290	0.35	50	43672004	HBU 30 GP ST 0,35
				10	43672001	HBU 30 ST 0,35
4	25	290	0.35	50	43673004	HBU 40 GP ST 0,35
				10	43673001	HBU 40 ST 0,35
5	25	290	0.35	50	43670004	HBU 50 GP ST 0,35
				10	43670001	HBU 50 ST 0,35
6	25	290	0.35	10	43673111	HBU 60 ST 0,35

Stainless steel wire (INOX)

1	25	290	0.30	10	43670013	HBU 10 INOX 0,30
2	25	290	0.30	10	43671003	HBU 20 INOX 0,30
3	25	290	0.30	10	43672003	HBU 30 INOX 0,30
4	25	290	0.30	50	43673005	HBU 40 GP INOX 0,30
				10	43673003	HBU 40 INOX 0,30
5	25	290	0.30	10	43670003	HBU 50 INOX 0,30
6	25	290	0.35	10	43673113	HBU 60 INOX 0,30

Brass wire (MES)

2	25	290	0.30	10	43671002	HBU 20 MES 0,30
3	25	290	0.30	10	43672002	HBU 30 MES 0,30
4	25	290	0.30	10	43673002	HBU 40 MES 0,30
5	25	290	0.30	10	43670002	HBU 50 MES 0,30



HBU LH, Long Handle

Suitable for cleaning, derusting, and cleaning of weld seams and surfaces. Extra-long handle.

Special features:

- Optimum presentation on the PFERD TOOLS CENTER using hanging hole and labelling with EAN number, designation and filament material.

Rows	L _T [mm]	L [mm]	D _F [mm]		Item no.	Designation
------	------------------------	-----------	------------------------	---	----------	-------------

Steel wire (ST)

3	25	350	0.35	10	43672011	HBU LH 30 ST 0,35
4	25	350	0.35	10	43673011	HBU LH 40 ST 0,35



HBK, for fillet welds

Suitable for cleaning and derusting fillet welds and V-shaped welds thanks to the V shape.



Special features:

- Optimum presentation on the PFERD TOOLS CENTER using hanging hole and labelling with EAN number, designation and filament material.


Rows	L _T [mm]	L [mm]	D _F [mm]		Item no.	Designation
------	------------------------	-----------	------------------------	---	----------	-------------

Steel wire (ST)

3	35	290	0.35	10	43676001	HBK 30 ST 0,35
---	----	-----	------	----	----------	----------------

Stainless steel wire (INOX)

3	35	290	0.35	10	43676003	HBK 30 INOX 0,35
---	----	-----	------	----	----------	------------------

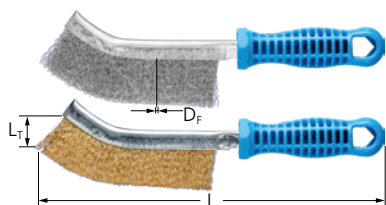

HBG, curved

Excellent for cleaning work in hard-to-reach areas, e.g. angles, corners and pipes.



Special features:

- Optimum presentation on the PFERD TOOLS CENTER using hanging hole and labelling with EAN number, designation and filament material.

Rows	L _T [mm]	L [mm]	D _F [mm]		Item no.	Designation
------	------------------------	-----------	------------------------	---	----------	-------------

Steel wire (ST) – ST = brass-plated steel wire

1	25	265	0.30	10	43660001	HBG 10 ST 0,30
---	----	-----	------	----	----------	----------------

Stainless steel wire (INOX)

1	25	265	0.30	10	43662003	HBG 10 INOX 0,30
---	----	-----	------	----	----------	------------------

Brass wire (MES)

1	25	265	0.30	10	43662002	HBG 10 MES 0,30
---	----	-----	------	----	----------	-----------------