


1 Oil /min

PGAS 1/550 DV


Sophisticated air-powered straight grinder with exhaust directed to the rear and ring throttle version. Offers high cutting speed for TC burrs and mounted points.

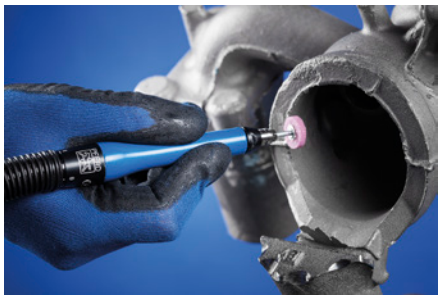

Contents:
0.75 m exhaust hose and 2 m air supply hose with 1/4" male threaded connection and threaded quick coupling (STGI), 3 mm collet (collet group 15), 2 keys (DM SW 6/8 mm).

Special features:
- Easy guidance thanks to slim, lightweight design.

Rotational speed [RPM]	Power output [watts]	Air consumption at idle [m³/min]	Air consumption under load [m³/min]	Air supply hose internal dia. [mm]	Net weight [kg]	Item no.	Designation
55,000	100	0.25	0.12	4.8	0.091	80105100	PGAS 1/550 DV

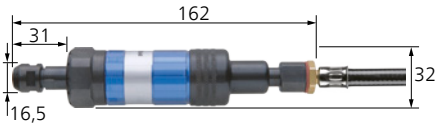

3 Oil /min

PG 3/500 S

Sophisticated air-powered straight grinder with exhaust directed to the front. With push-pull throttle version suitable for continuous use.

Contents:
3 m air supply hose with 1/4" male threaded connection and threaded quick coupling (STGI), 6 mm collet (collet group 5), 2 keys (1x EM SW 7/16", 1x EM SW 9/16").

Special features:
- Light and easy to handle.

Rotational speed [RPM]	Power output [watts]	Air consumption at idle [m³/min]	Air consumption under load [m³/min]	Air supply hose internal dia. [mm]	Net weight [kg]	Item no.	Designation
50,000	200	0.45	0.24	8.5	0.370	80107050	PG 3/500 S



3 Oil /min

PGAS 3/500 HV

Sophisticated air-powered straight grinder with exhaust directed to the rear and dead man's switch using safety lever valve.

Contents:
3 m air supply hose with 1/4" male threaded connection and threaded quick coupling (STGI), 1 m exhaust hose, 6 mm collet (collet group 5), 2 keys (1x EM SW 7/16", 1x EM SW 9/16").

Special features:
- Light and easy to handle.

Rotational speed [RPM]	Power output [watts]	Air consumption at idle [m³/min]	Air consumption under load [m³/min]	Air supply hose internal dia. [mm]	Net weight [kg]	Item no.	Designation
50,000	200	0.45	0.24	8.5	0.460	80107055	PGAS 3/500 HV