

PGAS 4/220 Z-HV

Sophisticated air-powered straight grinder with exhaust directed to the rear and dead man's switch using safety lever valve. Can also be operated without oil; however, this will lead to a shorter service life and reduced rotational speed and power output.

Contents:
1 m exhaust hose and 2.5 m air supply hose with 1/4" male threaded connection and threaded quick coupling (STGI), 6 mm collet (collet group 20), 2 keys (1x EM SW 12 mm, 1x EM SW 17 mm).

Special features:
- Very powerful with a compact design.
- Can be guided precisely thanks to comfortable two-handed operation.

Rotational speed [RPM]	Power output [watts]	Air consumption at idle [m³/min]	Air consumption under load [m³/min]	Air supply hose internal dia. [mm]	Net weight [kg]	Item no.	Designation
22,000	400	0.98	0.87	8	1.221	80106005	PGAS 4/220 Z-HV



PG 8/220 HV

Sophisticated air-powered straight grinder with exhaust directed to the front and dead man's switch using safety lever valve.

Contents:
3 m air supply hose with 1/4" male threaded connection and threaded quick coupling (STGI), 6 mm collet (collet group 7), 2 keys (1x EM SW 9/16", 1x EM SW 3/4").

Special features:
- Compact design.

Rotational speed [RPM]	Power output [watts]	Air consumption at idle [m³/min]	Air consumption under load [m³/min]	Air supply hose internal dia. [mm]	Net weight [kg]	Item no.	Designation
22,000	600	0.95	0.85	8.5	0.950	80107081	PG 8/220 HV




PGAS 8/220 HV

Sophisticated air-powered straight grinder with exhaust directed to the rear and dead man's switch using safety lever valve.

Contents:
3 m air supply hose with 1/4" male threaded connection and threaded quick coupling (STGI), 1 m exhaust hose, 6 mm collet (collet group 7), 2 keys (1x EM SW 9/16", 1x EM SW 3/4").

Special features:
- Compact design.

Rotational speed [RPM]	Power output [watts]	Air consumption at idle [m³/min]	Air consumption under load [m³/min]	Air supply hose internal dia. [mm]	Net weight [kg]	Item no.	Designation
22,000	600	0.95	0.85	8.5	1.000	80107085	PGAS 8/220 HV

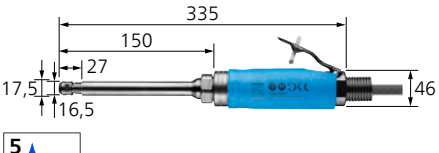

PGAS 8/220 VS-HV

Sophisticated air-powered straight grinder with exhaust directed to the rear and dead man's switch using safety lever valve.

Contents:
1 m exhaust hose and 3 m air supply hose with 1/4" male threaded connection and threaded quick coupling (STGI), 6 mm collet (collet group 5), 2 keys (1x EM SW 7/16", 1x EM SW 9/16").

Special features:
- With exceptionally slim drive extension.

Rotational speed [RPM]	Power output [watts]	Air consumption at idle [m³/min]	Air consumption under load [m³/min]	Air supply hose internal dia. [mm]	Net weight [kg]	Item no.	Designation
22,000	600	0.95	0.85	8.5	1.170	80706060	PGAS 8/220 VS-HV