

2 Oil /min


PWAS 2/200 HV

Sophisticated air-powered angle grinder with exhaust directed to the rear, collet and dead man's switch using safety lever valve.

Contents:
1 m exhaust hose and 2.5 m air supply hose with 1/4" male threaded connection and threaded quick coupling (STGI), 6 mm collet (collet group 6), 2 keys (1x EM SW 11 mm, 1x EM SW 14 mm).

Special features:
- Slim angle head for work in hard-to-reach areas.
- Easy to handle, compact shape.

Rotational speed [RPM]	Power output [watts]	Air consumption at idle [m³/min]	Air consumption under load [m³/min]	Air supply hose internal dia. [mm]	Net weight [kg]	Item no.	Designation
20,000	230	0.55	0.45	6	0.460	80205036	PWAS 2/200 HV

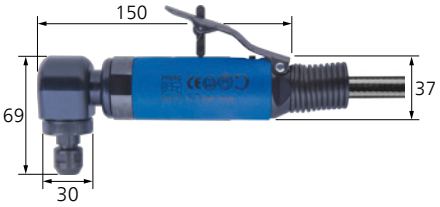

3 Oil /min


PWSA 4/200 HV

Sophisticated compressed-air angle grinder with exhaust directed to the rear, dead man's switch using safety lever valve and collet. Features a low angle head height and high spindle concentricity.

Contents:
1 m exhaust hose and 3 m air supply hose with 1/4" male threaded connection and threaded quick coupling (STGI), 6 mm collet (collet group 5), 2 keys (1x EM SW 7/16", 1x EM SW 9/16").

Special features:
- Compact design.
- Good size/weight to output ratio.
- Dead man's switch using safety lever valve.

Rotational speed [RPM]	Power output [watts]	Air consumption at idle [m³/min]	Air consumption under load [m³/min]	Air supply hose internal dia. [mm]	Net weight [kg]	Item no.	Designation
20,000	300	0.57	0.42	8.5	0.520	80700277	PWSA 4/200 HV

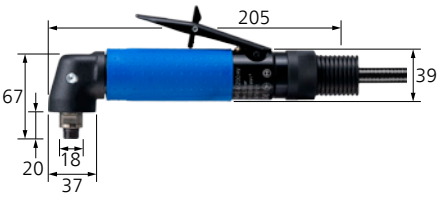

3 Oil /min

PWAS 4/200 HV

Sophisticated compressed-air angle grinder with exhaust directed to the rear, dead man's switch using safety lever valve and collet. Ideal for work in hard-to-reach areas.

Contents:
1 m exhaust hose and 2.5 m air supply hose with 1/4" male threaded connection and threaded quick coupling (STGI), 6 mm collet (collet group 6), 2 keys (1x EM SW 11 mm, 1x EM SW 14 mm).

Special features:
- Low angle head height.
- Dead man's switch using safety lever valve.

Rotational speed [RPM]	Power output [watts]	Air consumption at idle [m³/min]	Air consumption under load [m³/min]	Air supply hose internal dia. [mm]	Net weight [kg]	Item no.	Designation
20,000	370	0.7	0.6	8	0.920	80209011	PWAS 4/200 HV