


## CONFLEX ISOLATORS

Conflex isolators are designed to meet almost all machinery installations within the load range. available in four rubber hardnesses they are the versatile answer to your mobile or static vibration problems.

Available in Neoprene for "NM12" suffix part numbers

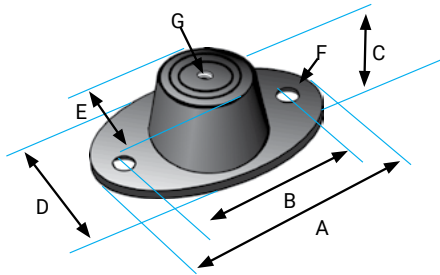

| Part No. | Duro | A   | B   | C  | D  | E  | F    | G   | Load Kg | Deflection mm | Weight Kg |
|----------|------|-----|-----|----|----|----|------|-----|---------|---------------|-----------|
| M111135  | 35   | 80  | 60  | 28 | 50 | 31 | 8.5  | M8  | 38      | 6.0           | 0.08      |
| M111145  | 45   | 80  | 60  | 28 | 50 | 31 | 8.5  | M8  | 47      | 6.0           | 0.08      |
| M111155  | 55   | 80  | 60  | 28 | 50 | 31 | 8.5  | M8  | 60      | 6.0           | 0.08      |
| M111165  | 65   | 80  | 60  | 28 | 50 | 31 | 8.5  | M8  | 83      | 6.0           | 0.08      |
| M1111D35 | 35   | 80  | 60  | 38 | 50 | 31 | 8.5  | M8  | 40      | 8.0           | 0.09      |
| M1111D45 | 45   | 80  | 60  | 38 | 50 | 31 | 8.5  | M8  | 65      | 8.0           | 0.09      |
| M1111D55 | 55   | 80  | 60  | 38 | 50 | 31 | 8.5  | M8  | 80      | 8.0           | 0.09      |
| M1111D65 | 65   | 80  | 60  | 38 | 50 | 31 | 8.5  | M8  | 110     | 8.0           | 0.09      |
| M111235  | 35   | 100 | 76  | 32 | 60 | 46 | 8.5  | M10 | 90      | 6.0           | 0.15      |
| M111245  | 45   | 100 | 76  | 32 | 60 | 46 | 8.5  | M10 | 110     | 6.0           | 0.15      |
| M111255  | 55   | 100 | 76  | 32 | 60 | 46 | 8.5  | M10 | 160     | 6.0           | 0.15      |
| M111265  | 65   | 100 | 76  | 32 | 60 | 46 | 8.5  | M10 | 220     | 6.0           | 0.15      |
| M1112D35 | 35   | 100 | 76  | 48 | 60 | 45 | 8.5  | M10 | 80      | 10.0          | 0.17      |
| M1112D45 | 45   | 100 | 76  | 48 | 60 | 45 | 8.5  | M10 | 120     | 10.0          | 0.17      |
| M1112D55 | 55   | 100 | 76  | 48 | 60 | 45 | 8.5  | M10 | 160     | 10.0          | 0.17      |
| M1112D65 | 65   | 100 | 76  | 48 | 60 | 45 | 8.5  | M10 | 250     | 10.0          | 0.17      |
| M111435  | 35   | 140 | 104 | 44 | 85 | 60 | 14.0 | M12 | 115     | 6.0           | 0.43      |
| M111445  | 45   | 140 | 104 | 44 | 85 | 60 | 14.0 | M12 | 170     | 6.0           | 0.43      |
| M111455  | 55   | 140 | 104 | 44 | 85 | 60 | 14.0 | M12 | 240     | 6.0           | 0.43      |
| M111465  | 65   | 140 | 104 | 44 | 85 | 60 | 14.0 | M12 | 405     | 6.0           | 0.43      |


### NEOPRENE

|                 |    |     |    |    |    |    |     |     |     |     |      |
|-----------------|----|-----|----|----|----|----|-----|-----|-----|-----|------|
| M111235NM12-RED | 35 | 100 | 76 | 32 | 60 | 48 | 8.5 | M12 | 90  | 6.0 | 0.15 |
| M111255NM12-GRN | 55 | 100 | 76 | 32 | 60 | 48 | 8.5 | M12 | 160 | 6.0 | 0.15 |
| M111265NM12-GRY | 65 | 100 | 76 | 32 | 60 | 48 | 8.5 | M12 | 250 | 6.0 | 0.15 |

# = hardness (35,45,55,65)

## STATIONARY APPLICATION

When used with centre nut & bolt, It becomes an easy to install Machine Footing

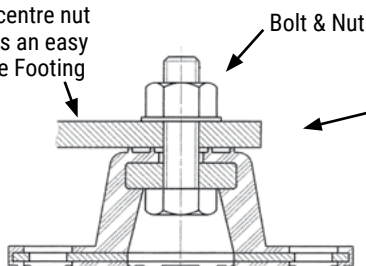

Note: Rubber & Steel washer not supplied by Mackay Consolidated

## MOBILE APPLICATION

