
ISOMOUNT ISOLATORS


In the past fitment of inappropriate height adjusters has resulted in premature failure of the isolator by damage to the centre spindle.

Both types of height adjusters are available separately for each size Isomount, under the part numbers shown in Fig2.

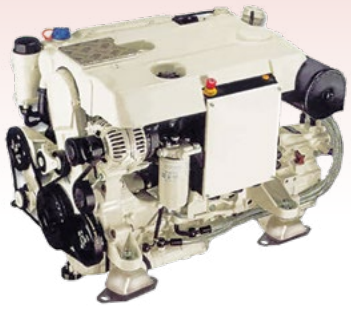

TYPE '2'



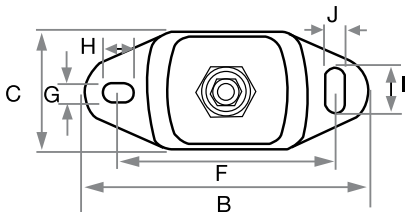

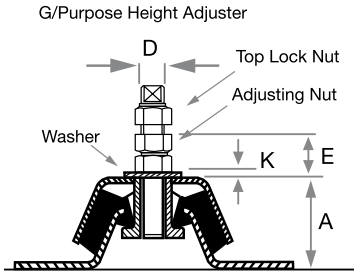
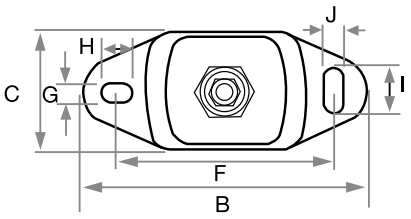


FIG 2

ISOMOUNT Generic No.	Height Adjuster Part No.			
	G/Purpose	Weight Kg	H/Thrust	Weight Kg
M2000	M2000A	0.13	M2000B	0.3
M2200	M2200A	0.3	M2200B	0.5
M2400	M2400A	0.5	M2400B	0.7

TYPE '3'








FIG 3

Generic No.	Type	A	B	C	D	E		F	G	H	I	J	K	Weight kg
						Max	Min							
M2000	1	38.5	120	60	M12	-	-	100	14	11	14	11	-	0.4
M2001	2	38.5	120	60	M12	32	22	100	14	11	14	11	3	0.5
M2002	3	38.5	120	60	M12	40	30	100	14	11	14	11	3	0.6
M2200	1	50.0	183	75	M16	-	-	140	13	20	30	13	-	0.9
M2201	2	50.0	183	75	M16	38	28	140	13	20	30	13	4	1.2
M2202	3	50.0	183	75	M16	41	31	140	13	20	30	13	4	1.4
M2400	1	68.0	228	112	M20	-	-	182	18	26	34	18	-	2.2
M2401	2	68.0	228	112	M20	44	34	182	18	26	34	18	4	2.8
M2402	3	68.0	228	112	M20	41	31	182	18	26	34	18	4	2.9

All Dimensions in Millimetres

All properties nominal, contact Mackay for Technical advice

© Mackay Australia Pty Ltd 2026

Industrial Edition 09/2026