

OVERLOAD AND REBOUND WASHERS

Overload and rebound washers (top and Bottom) are necessary to limit maximum movement in the event of shock loading.


Type A
Steel washer



Type B
Top Stepped Steel Washer

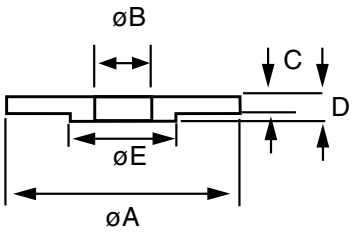

Type C
Rebound Washer with Rubber

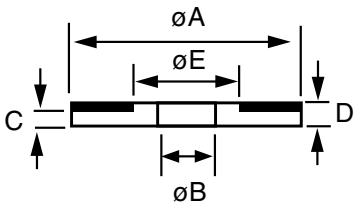

Part No.	TYPE	A	B	C	D	E	Top Washer Overload	Bottom Washer Rebound	Weight Kg
M15286	C	48	12	3	6	28.5		**M80409**	0.1
M153526	C	95	25	6	14	47			
M153527	C	117	25	6	16	48			
M153528	C	67	20	5	10	35			0.2
M18146C	B	116	25	4	8	47			
M181550C	A	139	25	10			**M801550**	**M801550**	1.15
M18168C	B	155	25	4	8	47			
M18225H	B	80	20	3	6	34.5			0.25
M18409A	A	50	12	4			**M80409**		0.07

RECOMMENDED TIGHTENING TORQUE FOR CENTRE FIXING BOLTS

THREAD SIZE	TORQUE (Nm)
M10	25
M12	40
M16	135
M20	180
M24	260

All properties nominal, contact Mackay for Technical advice

All Dimensions in Millimetres

© Mackay Australia Pty Ltd 2026