


STABIFLEX ISOLATORS

The STABIFLEX flexible isolator offers a metal protection shield for the rubber in applications where this is considered necessary.

The STABIFLEX isolators provide excellent isolation in both compression and shear loadings and are suitable in applications where isolation in the horizontal plane as well as the vertical plane is required.



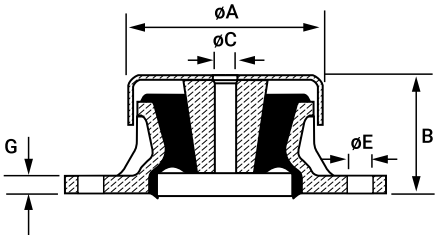




Generic No.	A	B	C	D	E	F	G	Weight Kg
M530603	69	41	M12	98	9	114	6	0.3
M530613	84	51	M12	115	11	137	7	0.5
M530642	133	69	M16	114	13	144	9	2.3


Part No.	LOAD RANGE Kg	NOMINAL DEFLECTION mm	DURO
M53060345	10 - 42	3.5	45
M53060360	15 - 60	3.0	60
M53060375	30 - 125	4.0	75
M53061345	20 - 93	3.5	45
M53061360	40 - 165	3.5	60
M53061375	65 - 260	3.0	75
M53064245	110 - 450	8.0	45

Hardness Colour Codes	
DURO	COLOUR
45	Grey
60	Green
75	Red


M530603




M530613



M530642



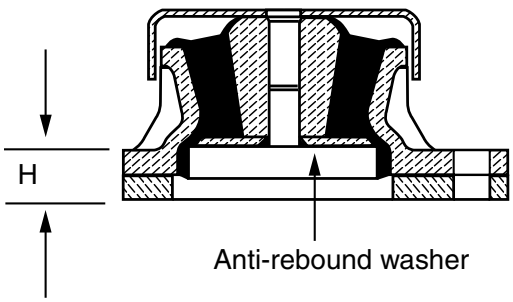

FITTING WITH ANTI-REBOUND WASHER.

An anti-rebound washer must be fitted if tension forces are likely to be exerted on the isolator. (I.E. for equipment mounted on trailers, ships etc.). The washer is fitted under the inner cone to fit the shape of the outer ring. Do not forget to allow for a clearance space under the isolator according to the following table;

- M530603 H=2mm
- M530613 H=4mm

Note: The anti-rebound washer is not supplied by Mackay Australia Pty Ltd

All properties nominal, contact Mackay for Technical advice

All Dimensions in Millimetres

© Mackay Australia Pty Ltd 2026