
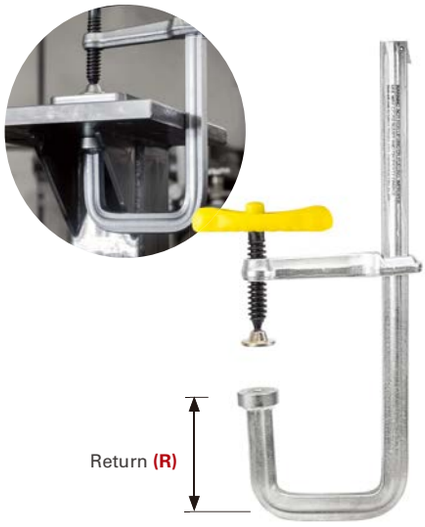


STEP-OVER J-CLAMPS

- J-shaped frame clears lips, flanges, and structural edges (angle iron, channel, and I-beams) without losing clamping pressure.
- Reaches past raised edges and clamps flat on the work surface, no spacers or workarounds needed.
- Quick arm removal and reversible.
- Standard tapped hole (E): M10 & M8

PN	A (mm)	B (mm)	R (mm)	C (kg)	D (mm)	Pad	Weight (kg)
UM205JM	521	140	100	1,100	31 x 14	Heavy Duty	4.2
UM125JM	318	140	100	1,100	31 x 14	Heavy Duty	3.7
UG105JM	267	120	76	550	25 x 12	Standard	2.3
UF100JM	254	120	76	460	22 x 11	Standard	1.5
UD45JM	114	83	50	230	16 x 8	Standard	0.6

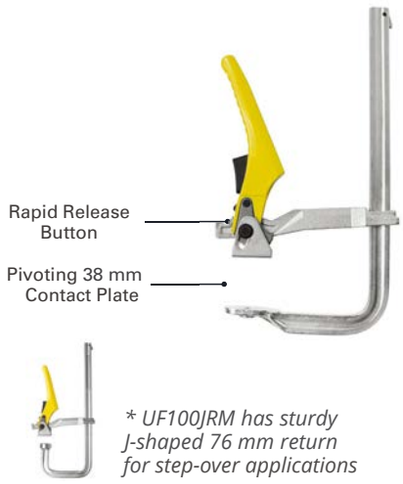


** UF100JRM has sturdy J-shaped 76 mm return for step-over applications*

RATCHET ACTION CLAMPS

Ratchet mechanism ensures rapid, vibration and torsion resistant clamping.

- Quick to setup, unlock, and remove in high volume clamping applications.
- Even clamping force. Ideal for repetitive clamping setups.
- M10 threaded hole for adding accessories.

PN	A (mm)	B (mm)	C (kg)	D (mm)	Weight (kg)
UG205RM	521	120	550	25 x 12	2.6
UG125RM	318	120	550	25 x 12	2.2
UG85RM	216	120	550	25 x 12	1.6
UF100RM	254	120	460	22 x 11	1.3
UF100JRM*	254	120	460	22 x 11	1.4
UF65RM	180	120	460	22 x 11	1.2

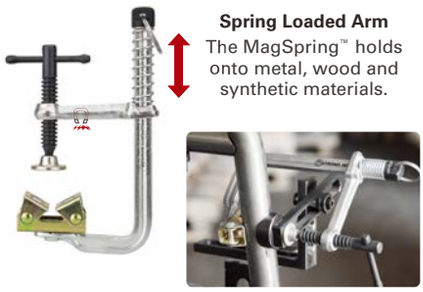

MAGSPRING™ CLAMPS

One-handed clamping enabled by the spring-loaded + magnetic V-pad

The spring-loaded arm + magnetic V-pad lets the clamp hold itself in place while you position the workpiece

Frees up your other hand to adjust, align, and tack. No third hand required.

PN	A (mm)	B (mm)	C (kg)	E (mm)	Weight (kg)
UBV65M	115	64	140	M6	0.4
UDV45M	75	83	230	M8	0.5
UDV65M	115	83	230	M8	0.6