
DRILL PRESS CLAMP



Quickly locks and releases make them ideal for repetitious clamping. Secure the Drill Press Clamp to any surface, up to 25 mm thick.

PN	Weight (kg)
PTD09	0.9

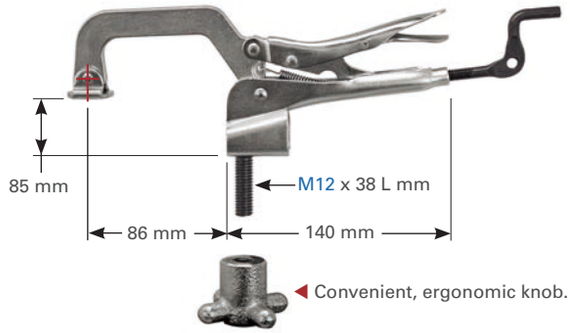

HALF CLAMP

Align materials quickly, safely, and precisely without the mess or hassle of DOG & WEDGE or cut-off C-Clamp methods. Slide it onto a tack-welded Ø48 pipe coupon, turn the handle, and draw plate edges together precisely and safely. The rear slot lets you break off the coupon cleanly

U.S. PAT. 6983525


PN	Weight (kg)
VHC15	2.2



HOLD DOWN CLAMP

Bolt the clamp down to your worktable using the Ø10.5 mm hole in the base.

- The 12.5 mm copper plated Acme spindle resists weld spatter, and the swivel tip makes quick contact with your workpiece.
- Hold pipes by adding our Clip-On V-Pad (XDA2).



PN	Weight (kg)
VHD30M	0.9

