For hex screws and hex nuts (inch).



334 Zoll **Hex driver with T-handle.**
Inch sizes.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha Classic T-handle.
Application: For high torque transfer with minimal effort.

Order-No.	◉					mm	
02802	3/32	150	176	80	26	2.38	10
02803	7/64	150	176	80	26	2.78	10
02804	1/8	150	176	80	26	3.18	10
02805	9/64	150	176	80	26	3.57	10
02806	5/32	150	176	80	26	3.97	10
02807	3/16	150	182	100	32	4.76	10
02808	7/32	150	182	100	32	5.56	10
02809	1/4	150	182	100	32	6.35	10
02810	5/16	150	182	100	32	7.94	10
02811	3/8	150	188	120	38	9.53	10



336 Zoll **Hex nut driver with T-handle.**
Inch sizes.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha Classic T-handle.
Application: For high torque transfer with minimal effort.
Extra: Recess in shank to accomodate for long screws.


Order-No.	○					mm	
02819	3/16	150	182	100	32	4.76	10
02820	1/4	150	182	100	32	6.35	10
02821	5/16	150	182	100	32	7.94	10
02822	3/8	150	182	100	32	9.53	10
02823	7/16	150	182	100	32	11.11	10
02824	1/2	150	182	100	32	12.70	10

Wiha Info

Colour-coding system:

red:
metric hex blades
yellow:
inch hex blades
green:
TORX® blades
light green:
TORX PLUS® blades

For hex nuts and hex socket screws.

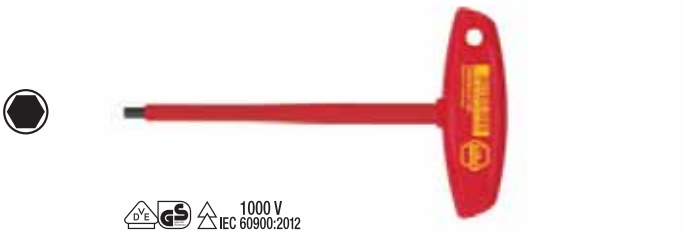

334N **VDE T-handle hex screwdriver.**
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: VDE-insulated T-handle.
Standards: Manufactured acc. to IEC 60900:2012.
Application: For allen screws.

Order-No.	◉					
27928	4	150	176	80	26	5
27929	5	150	182	100	32	5
27930	6	150	182	100	32	5
27931	8	150	182	100	32	5



336N **VDE T-handle hex nut driver.**
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade. Deep drawn socket.
Handle: VDE-insulated T-handle.
Standards: Manufactured acc. to IEC 60900:2012.
Application: For external hex screws and hex nuts.

Order-No.	○					
27932	8	200	232	100	32	5
27933	10	230	262	100	32	5
27934	13	230	262	100	32	5
27935	17	230	268	120	38	5