


Wheel brushes knotted, stationary

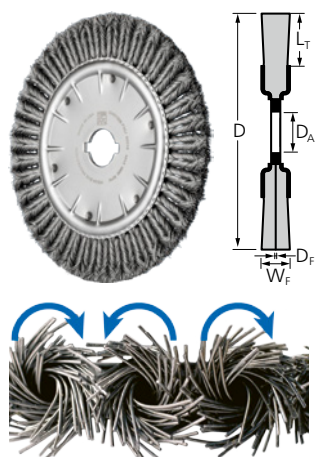

RBG, CT, COMBITWIST stationary


Aggressive and robust brush that is able to withstand high mechanical loads. Suitable for all heavy-duty stationary and automated brushing, e.g. deburring work. Suitable for work on corners and edges as the knots are less likely to unravel.

Special features:

- Maximum economic efficiency due to maximum tool life and stock removal rate. High level of comfort thanks to smooth running with no brush recoiling.
- Aggressive brushing effect due to the very stiff wire knots.
- Can be used with all commercially available stationary drive systems and bench grinders thanks to the variable hole diameter.

D [mm]	W _F [mm]	L _T [mm]	D _A [mm]	D _F [mm]	Knots	Opt. RPM	Max. RPM		Item no.	Designation
Steel wire (ST)										
350	20	56	50.8	0.50	80	700 – 3,000	3,600	1	79182019	RBG 35020/50,8 CT ST 0,50
380	20	67	50.8	0.50	80	700 – 3,000	3,600	1	79182020	RBG 38020/50,8 CT ST 0,50

crimped, with hole

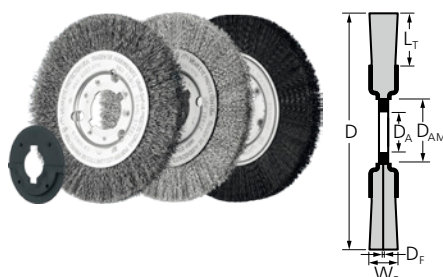

RBU, slim

Excellent for medium-duty hand-held or automated brushing of workpieces with large surfaces.

Special features:

- Can be used with all commercially available stationary drive systems and bench grinders thanks to the variable hole diameter.
- The special design enables bunching to create wide gapless rollers. This enables a uniform surface finish to be achieved.
- Highly flexible, enabling optimal adjustment to the workpiece contour.

D [mm]	W _F [mm]	L _T [mm]	D _A [mm]	D _{AM} [mm]	Grit size	D _F [mm]	Opt. RPM	Max. RPM		Item no.	Designation
Steel wire (ST)											
100	12	24	14	-	-	0.15	4,000 – 6,000	8,000	2	43502005	RBU 10012/14,0 ST 0,15
						0.30	4,000 – 6,000	8,000	2	43502009	RBU 10012/14,0 ST 0,30
125	12	32	14	-	-	0.30	4,000 – 6,000	8,000	2	43503001	RBU 12512/14,0 ST 0,30
150	12	28	22.2	31.8	-	0.25	3,000 – 4,500	6,000	2	43505005	RBU 15012/22,2 ST 0,25
180	12	43	22.2	31.8	-	0.30	3,000 – 4,500	6,000	2	43505201	RBU 18012/22,2 ST 0,30
200	16	44	22.2	31.8	-	0.25	3,000 – 4,500	6,000	2	43506005	RBU 20016/22,2 ST 0,25
250	20	70	22.2	31.8	-	0.25	1,800 – 2,700	3,600	2	43506505	RBU 25020/22,2 ST 0,25

Stainless steel wire (INOX) – All INOX brushes are degreased.

125	12	32	14	-	-	0.30	3,200 – 5,200	8,000	2	43503003	RBU 12512/14,0 INOX 0,30
150	12	28	22.2	31.8	-	0.30	2,400 – 3,900	6,000	2	43505006	RBU 15012/22,2 INOX 0,30
180	12	43	22.2	31.8	-	0.30	2,400 – 3,900	6,000	2	43505202	RBU 18012/22,2 INOX 0,30
200	16	44	22.2	31.8	-	0.30	2,400 – 3,900	6,000	2	43506010	RBU 20016/22,2 INOX 0,30
250	20	70	22.2	31.8	-	0.30	1,400 – 2,300	3,600	2	43506506	RBU 25020/22,2 INOX 0,30

Continued on next page